



CORPORATE PROFILE

Company Name	: Decent Distributions Ltd.
Corporate Office	: H # 102/1, R # 8/A (new), West Dhanmondi, Dhaka-1209, Bangladesh
Joint Stock Incorporation	: C-68799/2007
Incorporated on	: 24 October, 2007
Registered Trademark	: DECENT [®]
Products	: Lighting - Electrical - Accessories
After sales services	: 24 Hours to solve your 80% claims
Cell	: +880 1711 021768, +880 1711 009624
email	: sales@decentdistributions.com
Website	: www.decentdistributions.com
	: https://www.facebook.com/decentdistributions

Vision

Ensuring safety & comfort with an aesthetic touch in your life.

History

Decent Distributions Ltd. (DDL) started its journey in 2007 with aspiration to inaugurate new technologies with a better choice. Product lines are based on contemporary LED lights, suitable to use in your commercial spaces, industries and residences. We have created a family of products and experiences that help lighting professionals imagine and design their own composition of light for modern living and get necessary advice from our team.

Over the last 16 years DECENT[®] brand has created a loyal customer group who are more of quality and design conscious. These frequent user group has ultimately proven DECENT[®] product's long lasting and high lumen output features. We are continuously concentrating to make better technologies available at reasonable price all over the country through well-organized marketing channels - Corporate sales, Project sales and Retail/Channel sales.

Why **DECENT**[®] ?

Most of the products are CE certified to confirm the standard of safety & comfort.

Maximum products are sold with a certain period of warranty.

Products are comparatively durable and deliver high lumen output.

Customers' affordability is considered in product pricing. (Regular products)

Our professional sales personnel offer the apposite product counseling.

Inside the Dhaka metropolitan city delivery is free. (Quantity purchase)

For maintenance prompt after sales services (immediate warranty replacement)

ensuring safety and comfort...



Prominent Customers

DEVELOPERS



INTERIOR COMPANIES



MULTINATIONAL COMPANIES



ensuring safety and comfort...



BANK & FINANCIAL INSTITUTIONS



GROUPS & INDUSTRIES



GOVERNMENT & AUTONOMOUS INSTITUTIONS




ensuring safety and comfort...



LED LINEAR LIGHT - T1

24 months warranty against any manufacturing defect.



Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL40-1140-PRW/60	DLL40-1140-PRW/40	DLL40-1140-PRW/30	40w	White	L:1140 x W:60 x H:80
DLL40-1140-PRB/60	DLL40-1140-PRB/40	DLL40-1140-PRB/30	40w	Black	L:1140 x W:60 x H:80

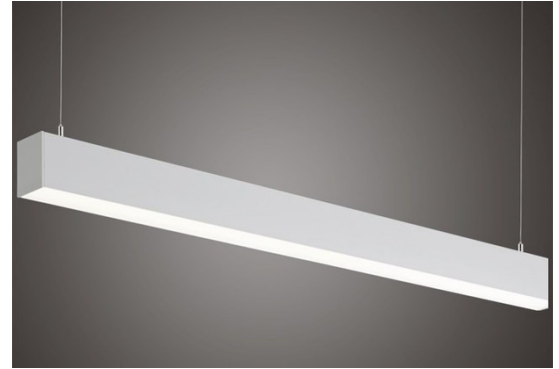

- Eye friendly
- Anti-glare
- Shadowless
- Uniformity
- Linkable
- Elegant Look

LED Chips brand :: SAMSUNG (Korea) || Driver :: Lifud

Aluminium body-screwless design-Germany diffuser

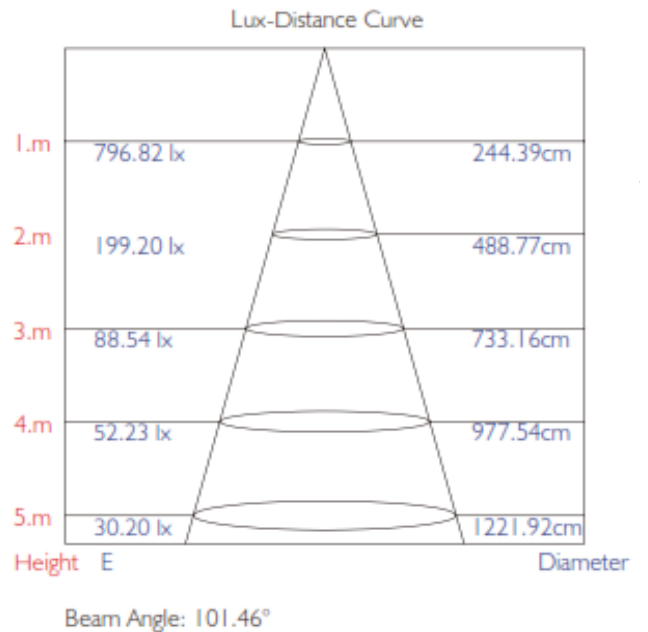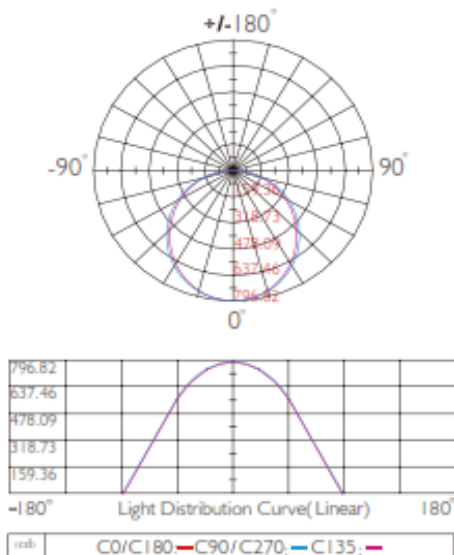

Voltage 180-265V at 50/60Hz
 mA 1000mA
 PF >0.9
 Lifetime 30,000hrs



Beam Angle 100°
 CRI ra>80
 Available CCT 6000K/4000K/3000K
 Lumen 4000lm

APPLICATIONS:: offices, hotels, display centre, public areas etc.


House # 102/1, Road # 8/A (New)
 West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
 +88 01711009624, 01711021768

ensuring safety and comfort...



LED LINEAR LIGHT - T1

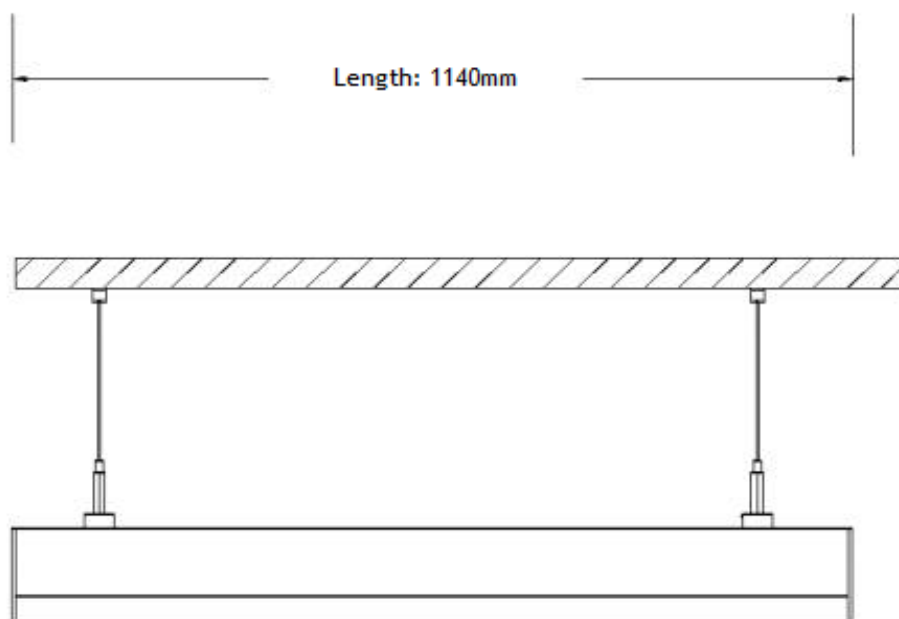

W: 60

H: 80mm


ensuring safety and comfort...



LED LINEAR LIGHT - T2

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL30-1185-PRW/65	DLL30-1185-PRW/40	DLL30-1185-PRW/30	30w	White	L:1185 x W:50 x H:60
DLL30-1185-PRB/65	DLL30-1185-PRB/40	DLL30-1185-PRB/30	30w	Black	L:1185 x W:50 x H:60
-	DLL60-2370-PRW/40	-	60w	White	L:2370 x W:50 x H:60
-	DLL60-2370-PRB/40	-	60w	Black	L:2370 x W:50 x H:60

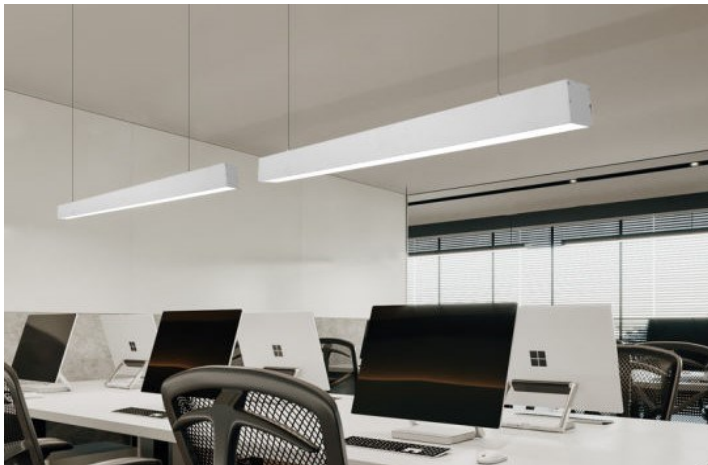

APPLICATIONS::

offices, hotels, display centre, public areas etc.


Eye friendly

Anti-glare

Shadowsless

Uniformity

Linkable

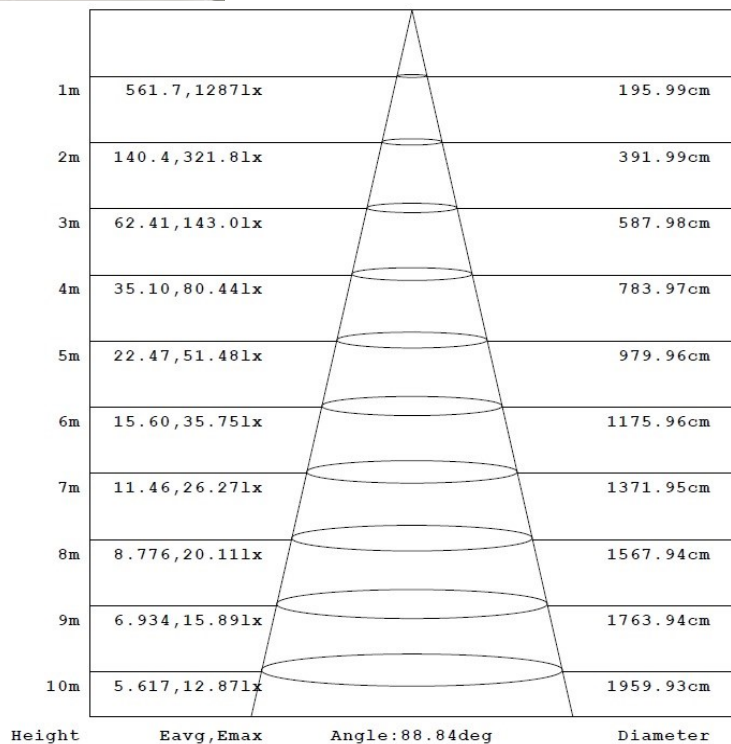

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Voltage	100-265V at 50/60Hz
mA	312mA
PF	>0.5
Lifetime	20,000hrs



Beam Angle	90°
CRI	ra>80
CCT	6500K/4000K/3000K
Lumen	3000lm

ensuring safety and comfort...



LED LINEAR LIGHT - T3

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Appearance	Material	Dimensions (mm)
DLL36-1240-80W/40	36w	Frosted Tubular diffuser :: WH	PMMA+Acrylic	L:1240 x W:80 x H:90



Voltage	180-265V 50Hz	Beam Angle	360°
mA	1000mA	CRI	ra>80
PF	>0.9	Available CCT	4000K
Lifetime	20,000hrs	Lumen/w	130lm


APPLICATIONS::

offices, banks, hotels, display centre, super market, public areas etc.

LED HANGING RING LIGHT

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Brand	Appearance	CCT	Dimensions (mm)
DLR36-600-3540B/40	36w	OSRAM (Germany)	Ring (Black)	4000 K	L:600 x W:35 x H:40
DLR36-600-3540B/30	36w	OSRAM (Germany)	Ring (Black)	3000 K	L:600 x W:35 x H:40
DLR50-800-3540B/40	50w	OSRAM (Germany)	Ring (Black)	4000 K	L:800 x W:35 x H:40
DLR50-800-3540B/30	50w	OSRAM (Germany)	Ring (Black)	3000 K	L:800 x W:35 x H:40
DLR60-1000-3540B/40	60w	OSRAM (Germany)	Ring (Black)	4000 K	L:1000 x W:35 x H:40
DLR60-1000-3540B/30	60w	OSRAM (Germany)	Ring (Black)	3000 K	L:1000 x W:35 x H:40

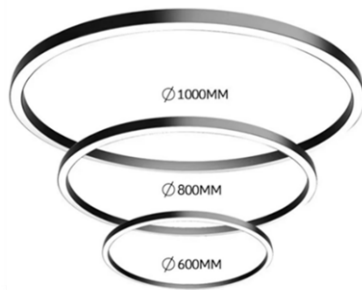

- Voltage :: 100-265V
- PF :: >0.9
- Beam Angle :: 120°
- CRI :: ra>80
- Lumen/w :: 120lm/w
- Lifetime :: 30000hrs



600mm
800mm
1000mm

APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

LED HANGING LIGHT - multi shape


24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Base	Appearance	CCT	Dimensions (mm)
DLH7-4032-PRW/40	07w	Round	Pipe (White)	4000 K	L:320 x W:40 x H:1000
DLH7-4032-PRB/40	07w	Round	Pipe (Black)	4000 K	L:320 x W:40 x H:1000
DLH5-5032-PRW/40	05w	Round	Pipe (white)	4000 K	L:505 x W:30-10 x H:1000
DLH5-5032-PRB/40	05w	Round	Pipe (Black)	4000 K	L:505 x W:30-10 x H:1000
DLH15-8020-PRW/40	15w	Round	Pipe (white)	4000 K	L:200 x W:80 x H:1000
DLH15-8020-PRB/40	15w	Round	Pipe (black)	4000 K	L:200 x W:80 x H:1000
DLH15-200-PRW/30	15w	Round	Crystal PC	3000 K	L:200 x W:200 x H:1000
DLH5-230-PDC/30	05w	Round	Dome (Clear glass)	3000 K	L:70 x W:230 x H:1000
DLH5-230-PDS/40	05w	Round	Dome (Smoked Grey)	4000 K	L:70 x W:230 x H:1000
DLFB6-27G95/30	06w	Round	(Antic Brass)	3000 K	L:95 x W:95 x H:1000

Voltage :: 85V-265V

Lumen :: 80lm/w

PF :: >0.6

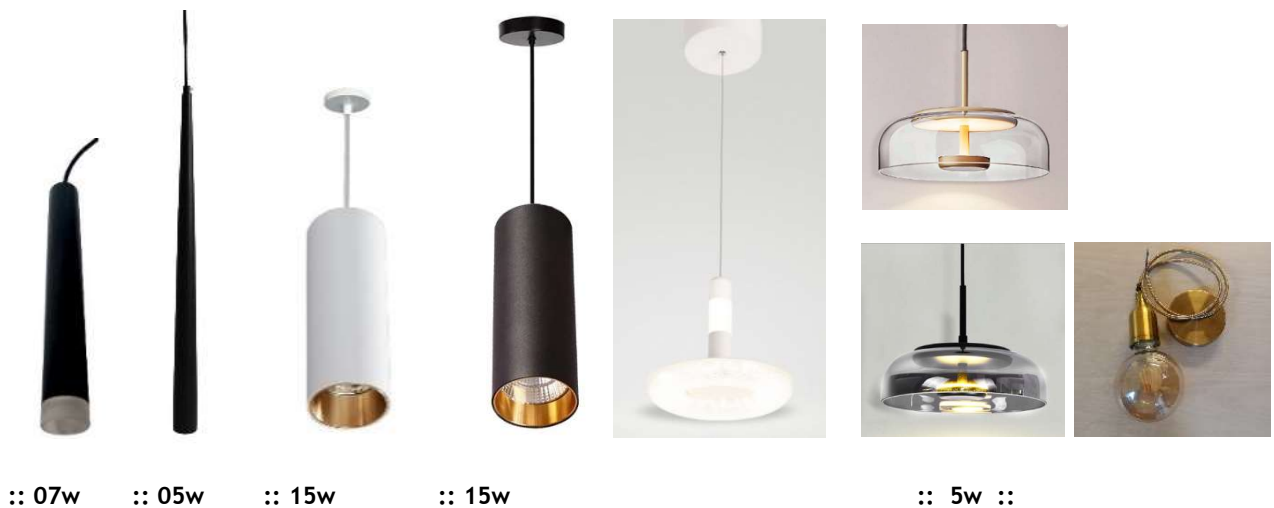

APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

ensuring safety and comfort...



LED HANGING LIGHT - circular shape

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Base	Appearance	CCT	Dimensions (mm)
DLHL50-392-PRW-643	30/50w	Round	Saucer (white)	6000/4000/3000 K	L:392 x W:392 x H:1000
DLHL50-392-PRB-643	30/50w	Round	Saucer (Black)	6000/4000/3000 K	L:392 x W:392 x H:1000

SPECIAL FEATURE

Flexibility of CCT changing on mood

CCT can be changed on switching

3 CCT in 1 set : 6000/4000/3000 K

Voltage :: 85V-265V

Lumen :: 80lm/w

PF :: >0.6


CRI :: 80Ra



APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

PENDANT LIGHT FIXTURE WITHOUT LAMP

Item Code	Colour (inside)	Colour (outside)	Base	Dimensions (mm)
DPL250-290-WH/BK	White	Black + Wood	1 x E27	L:290 x W:250 x H:1000
DPL220-500-GD/BK	Golden	Black	1 x E27	L:500 x W:220 x H:1000
DPL360-400-WH/BK	White	Black + Wood	1 x E27	L:400 x W:360 x H:1000
DPL400-A127/WH	White	White	1 x E27	L:200 x W:400 x H:1000
DPL400-A127/GD/BK	Golden	Black	1 x E27	L:200 x W:400 x H:1000
DPL400-A127/SN	White	Satin Nickel	1 x E27	L:200 x W:400 x H:1000
DPL420-320-WH/BK	Black	Black + Acrylic	3 x E27	L:320 x W:420 x H:1000

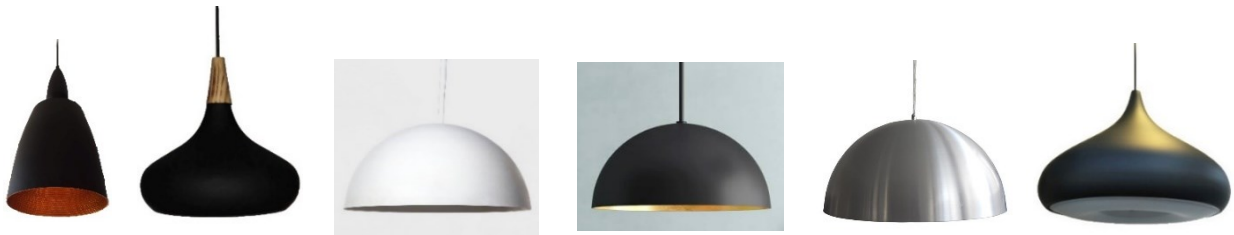

APPLICATIONS ::

restaurants, office, hotels, residence, display centre, etc.

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

WALL BRACKET INDOOR

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	CCT	Frame	Appearance	Dimensions (mm)
DLWB24-400-2SW/40	24w	4000 K	Snake	White	L:400 x W:240 x H:70
DWB-250-G127-FW	no lamp (1xE27)	-	Flower	Fogged Glass & Black	L:250 x W:180 x H:230
DLML10-460-SRW/40	10w	4000 K	Alluminium	White	L:460 x W:70 x H:60
DLML12-570-MW/643	12w	6/4/3000 K	Rectangular	Moving White	L:570 x W:200 x H:120
DLML8-570-FS/643	08w	6/4/3000 K	Rectangular	Fixed Silver	L:570 x W:35 x H:75
DML-580-FG314/SV	no lamp (3xE14)	-	Rectangular	3 Heads Fogged Glass	L:570 x W:35 x H:75
DLUD5-150-SOW/30	05w	3000 K	Oval	White	L:150 x W:100 x H:100
DLUD5-100-SSW/30	05w	3000 K	Square	White	L:100 x W:100 x H:80
DLUD6-130-SRW/30	06w	3000 K	Rectangular	White	L:130 x W:110 x H:60

::: Updown Light 05w



Watt : 2x12w



Watt :: 5w



Fogged Glass :
Flower Shape



Watt :: 2x3w




APPLICATIONS ::

hotels, residence, ressorts, public areas etc.

LED T5 INTEGRATED FIXTURE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Item Code (WARM)	Power (Rated)	Dimensions (mm)
DLF18-1200T5/60	DLF18-1200T5/40	DLF18-1200T5/30	DLF18-1200T5/27	18w	L:1178 x W:20 x H:32
DLF14-900T5/60	DLF14-900T5/40	DLF14-900T5/30	DLF14-900T5/27	14w	L:875 x W:20 x H:32
DLF9-600T5/60	DLF9-600T5/40	DLF9-600T5/30	DLF9-600T5/27	09w	L:570 x W:20 x H:32
DLF5-300T5/60	DLF5-300T5/40	DLF5-300T5/30	DLF5-300T5/27	05w	L:290 x W:20 x H:32

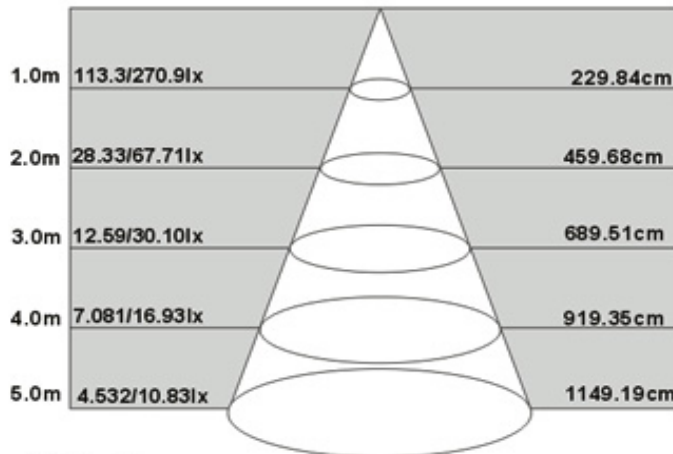

T5 square alluminum white body milky diffuser



APPLICATIONS ::

offices, hotels, banks, display centre, residence, public areas etc.

Operating Voltage 5-265V at 50/60Hz

Indirect lighting

Connectable

Lumen Maintenanç± 5% after 8,000hrs

Lumen :: 80lm/w CRI :: ra>80

Beam Angle :: 120° PF :: >0.6

Appearance :: Semi Rectangle (WHITE)



Transparent cap

Available sizes

LED FLEXIBLE STRIP

12 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	LED Chip	Voltage	IP	Dimensions (mm)
DLFS5-D120/60	DLFS5-D120/40	DLFS5-D120/30	5730 : D120	220V	IP68	L:10000 x W:16 x H:07
-	-	DLFS8-T180/30	2835 : T180	220V	IP68	L:10000 x W:18 x H:07
DLFS10-220V-1207/60	DLFS10-220V-1207/40	DLFS10-220V-1207/30	COB: S320	220V	IP65	L:10000 x W:12 x H:07
-	DLSS16-24V-2020/40	-	2835 : S120	24V	IP65	L:5000 x W:20 x H:20
-	DLSS9-220V-1010/40	-	2835 : S120	220V	IP65	L:10000 x W:10 x H:10
-	DLSS9-24V-1010/40	-	2835 : S120	24V	IP65	L:10000 x W:10 x H:10
-	DLFS15-20-S2824/40	DLFS15-20-S2824/30	2835 : S280	24V	IP68	L:500 x W:10 x H:06
DLFS9-28-S1212/60	DLFS9-28-S1212/40	DLFS9-28-S1212/30	2835 : S120	12V	IP20	L:500 x W:08 x H:04
-	DLFS9-28-S1224/40	DLFS9-28-S1224/30	2835 : S120	24V	IP20	L:500 x W:08 x H:04
DLFS19-28-S2412/60	DLFS16-28-S2012/40	DLFS19-28-S2412/30	2835 : S204	12V	IP20	L:500 x W:10 x H:04
-	-	DLFS14-50-S6012/RGB	5050 : S60	12V	IP20	L:500 x W:10 x H:04

:: Triple Line 220V



Single Frosted 220V




:: Single Frosted 24V




Size: 20*20mm

:: Silicone Strip 24V/220V



Size: 10*10mm

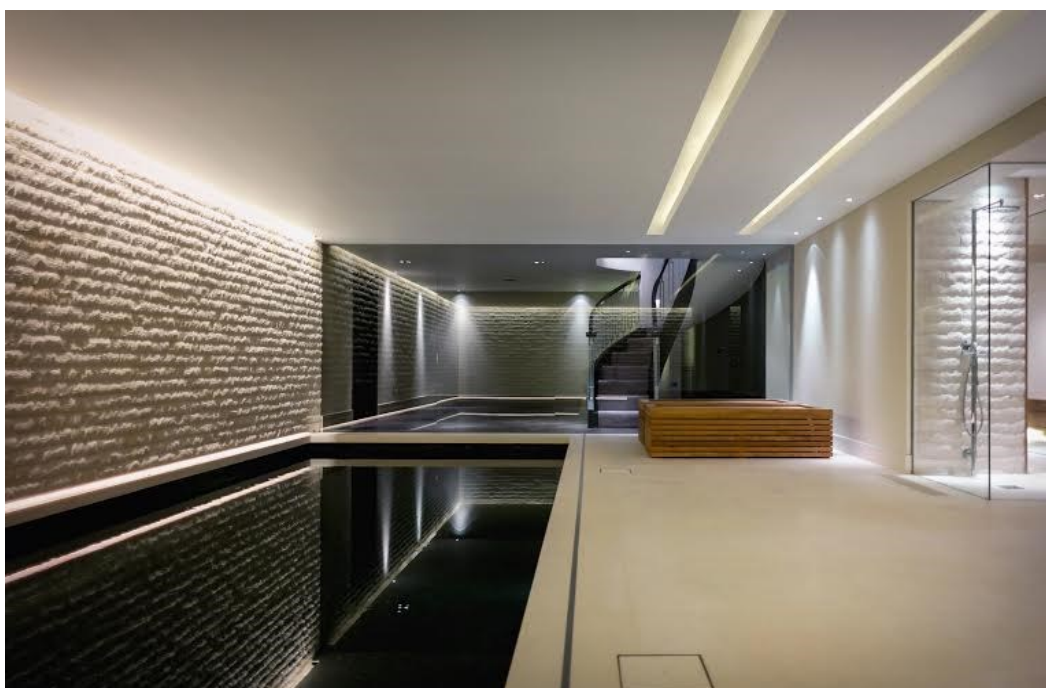

:: Strip 12V 9w



:: Strip 12V RGB



:: Strip 12V 16w




APPLICATIONS::

commercial buildings, hotels, residence, restaurants, public areas etc.

LED LINEAR LIGHT CONCEAL

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Material	Appearance	Cut-out (mm)	Dimensions (mm)
DLL30-1198-CRW/40	30w	Alumn+Acrylic	Rectangular ::White	Ø1190x55	L:1198 x W:63 x H:33
DLL30-1198-CRW/30	30w	Alumn+Acrylic	Rectangular ::White	Ø1190x55	L:1198 x W:63 x H:33
DLL30-1198-CRB/40	30w	Alumn+Acrylic	Rectangular ::Black	Ø1190x55	L:1198 x W:63 x H:33
DLL30-1198-CRB/30	30w	Alumn+Acrylic	Rectangular ::Black	Ø1190x55	L:1198 x W:63 x H:33

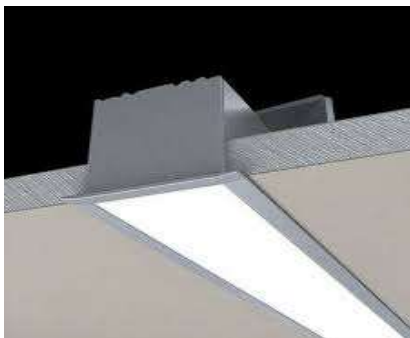

- :: continuous line
 - :: elegant look
 - :: customized shape
 - :: upgraded design
- Voltage* :: 160V-260V
 - CCT (K)* :: 4000/3000K
 - Lumen* :: 100lm/w
 - Appearance* :: White / Black



APPLICATIONS::








offices, banks, hotels, display centre, public areas etc.

LED SPOT LIGHT CONCEAL INDOOR

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLWW10-147-CRW-30	10w	3000 K	Fixed Opal :: Rectangular WH	138*36	L:147 x W:45 x H:50
	DLLS10-148FR-CW/40	10w	4000 K	Fixed Lensed :: Rectangular WH	138*36	L:148 x W:45 x H:50
	DLLS10-148FR-CB/40	10w	4000 K	Fixed Lensed :: Rectangular BK	138*36	L:148 x W:45 x H:50
	DLLS20-280FR-CB/40	20w	4000 K	Fixed Lensed :: Rectangular BK	270*36	L:280 x W:45 x H:50
	DLS7-63-MR-CRW/30	07w	3000 K	Moving Reflector :: Round WH	Ø55	L:63 x W:63 x H:70
	DLS7-63-MR-CRB/30	07w	3000 K	Moving Reflector :: Round BK	Ø55	L:63 x W:63 x H:70
	DLS7-80-MR-CRW/40	07w	4000 K	Moving Reflector :: Round WH	Ø70	L:80 x W:80 x H:80
	DLS7-80-MR-CRW/30	07w	3000 K	Moving Reflector :: Round WH	Ø70	L:80 x W:80 x H:80
	DLS5-63FR-CRW/40	05w	4000 K	Fixed Reflector :: Round WH	Ø58	L:63 x W:63 x H:60
	DLS7-63FR-CRW/40	07w	4000 K	Fixed Reflector :: Round WH	Ø58	L:63 x W:63 x H:60
	DLS7-63FR-CRB/40	07w	4000 K	Fixed Reflector :: Round BK	Ø58	L:63 x W:63 x H:60
	DLS7-85FR-CRW/40	07w	4000 K	Fixed Reflector :: Round WH	Ø75	L:85 x W:85 x H:80
	DLS7-85FR-CRW/30	07w	3000 K	Fixed Reflector :: Round WH	Ø75	L:85 x W:85 x H:80
	DLS12-84FR-CRW/40	12w	4000 K	Fixed Reflector :: Round WH	Ø75	L:84 x W:84 x H:78
	DLS12-84FR-CRW/30	12w	3000 K	Fixed Reflector :: Round WH	Ø75	L:84 x W:84 x H:78
	DLS12-84FR-CRB/40	12w	4000 K	Fixed Reflector :: Round BK	Ø75	L:84 x W:84 x H:78
	DLS7-92-BL-CSW/40	07w	4000 K	Moving Lensed :: Square WH	Ø75	L:92 x W:92 x H:50
	DLS7-92-BL-CSW/30	07w	3000 K	Moving Lensed :: Square WH	Ø75	L:92 x W:92 x H:50
	DLSC5-92-CSWB/30	05w	3000 K	Moving Reflector :: Square WH+BK	Ø75	L:92 x W:92 x H:55
	DLS10-90MR-SW/40	10w	4000 K	Moving Reflector :: Square WH	Ø75	L:90 x W:90 x H:85
	DLS7-85-GR-CRW/60	07w	6000 K	Moving Lensed :: Round WH	Ø75	L:85 x W:85 x H:65
	DLS7-85-GR-CRW/30	07w	3000 K	Moving Lensed :: Round WH	Ø75	L:85 x W:85 x H:65
	DLS7-85-GR-CRB/40	07w	4000 K	Moving Lensed :: Round BK	Ø75	L:85 x W:85 x H:65
	DLS7-85-GR-CRB/30	07w	3000 K	Moving Lensed :: Round BK	Ø75	L:85 x W:85 x H:65
	DLS7-92-BL-CRW/60	07w	6400 K	Moving Lensed :: Round White	Ø80	L:92 x W:92 x H:35
	DLS7-92-BL-CRW/40	07w	4000 K	Moving Lensed :: Round White	Ø80	L:92 x W:92 x H:35
	DLS7-92-BL-CRW/30	07w	3000 K	Moving Lensed :: Round White	Ø80	L:92 x W:92 x H:35
	DLS12-110-BL-CRW/40	12w	4000 K	Moving Lensed :: Round White	Ø90	L:110x W:110x H:40
	DLS12-110-BL-CRW/30	12w	3000 K	Moving Lensed :: Round White	Ø90	L:110x W:110x H:40

LED SPOT LIGHT CONCEAL INDOOR

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLS7-82ML-RWW/40	07w	4000 K	Moving Lensed :: Round WH+WH	Ø75	L:82 x W:82 x H:45
	DLS7-82ML-RWB/40	07w	4000 K	Moving Lensed :: Round WH+BK	Ø75	L:82 x W:82 x H:45
	DLS7-82ML-RWB/30	07w	3000 K	Moving Lensed :: Round WH+BK	Ø75	L:82 x W:82 x H:45
	DLS10-82ML-RWW/40	10w	4000 K	Moving Lensed :: Round WH+WH	Ø75	L:82 x W:82 x H:55
	DLS10-82ML-RWB/40	10w	4000 K	Moving Lensed :: Round WH+BK	Ø75	L:82 x W:82 x H:55
	DLS15-105ML-RWB/40	15w	4000 K	Moving Lensed :: Round WH+BK	Ø100	L:105 x W:105 x H:55
	DLS12-85-MR-CRB/30	12w	3000 K	Moving Reflector :: Round Black	Ø75	L:85 x W:85 x H:70
	DLS12-86FL-RWB/40	12w	4000 K	Fixed Lensed :: Round WH	Ø80	L:86x W:86x H:65
	DLS12-86FL-RWB/30	12w	3000 K	Fixed Lensed :: Round WH	Ø90	L:95x W:95x H:65
	DLS18-95FL-RWB/40	18w	4000 K	Fixed Lensed :: Round WH	Ø90	L:95x W:95x H:65
	DLS18-95FL-RWB/30	18w	3000 K	Fixed Lensed :: Round WH	Ø90	L:95x W:95x H:65
	DLS30-160-PR-CRW/30	30w	3000 K	Moving Lensed :: Round WH	Ø120	L:160 x W:160 x H:120
	DLS14-173-MR-CB/40	14w	4000 K	Moving Lensed :: Rectangular WH	Ø150*75	L:173 x W:92 x H:50
	DLS14-173-MR-CW/40	14w	4000 K	Moving Lensed :: Rectangular WH		L:173 x W:92 x H:50
	DLS24-212-MR-CW/40	2x12w	4000 K	Moving Reflector :: Rectangular WH	200*100	L:212 x W:112 x H:110
	DLS24-212-MR-CW/30		3000 K	Moving Reflector :: Rectangular WH		L:212 x W:112 x H:110
	DLS36-282-MR-CW/40	3x12w	4000 K	Moving Reflector :: Rectangular WH	265*100	L:282 x W:112 x H:110
	DLS30-230-MS-RW/40	3x12w	4000 K	Moving Stretch :: Rectangular WH	225*80	L:230 x W:85 x H:116

Voltage :: 85V-265 Lumen :: 100lm/w

CRI :: ra>80

Lifetime :: 30000hrs

SPOT LIGHT CASIGN CONCEAL

Item Code	Shell Material	Base	Colour	Cut-out (mm)	Dimensions (mm)
DSC-120-CSA-16SB	Alluminum	1 x GU5.3	Silver Brushed	Ø75	L:120 x W:120 x H:20
DSC-110-CSA-16WH	Alluminum	1 x GU5.3	White	Ø75	L:110 x W:110 x H:20
DSC-80-CSA-16SN	Zinc Alloy	1 x GU5.3	Satin Nickel	Ø75	L:80 x W:80 x H:20


SPOT LIGHT CASIGN-SINGLE (without lamp)



DSC-120-CSA-16SB



DSC-110-CSA-16WH



DSC-80-CSA-16SN



APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

LED SPOT LIGHT-mini CONCEAL INDOOR






24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLS1-22FL-CRW/40	01w	4000 K	Fixed Lensed :: Round White	Ø20	L:22 x W:22 x H:26
	DLS1-22FL-CRW/30		3000 K			
	DLS1-31FR-CRW/30	01w	3000 K	Fixed Reflector :: Round White		L:31 x W:31 x H:25
	DLS1-33FA-CRW/40	01w	4000 K	Fixed Acrylic :: Round White	Ø25	L:33 x W:33 x H:25
	DLS1-35FL-CRW/40	01w	4000 K	Fixed Lensed :: Round White	Ø25	L:35 x W:35 x H:25
	DLS1-35FL-CRW/30		3000 K			
	DLS3-38FR-CRS/30	03w	3000 K	Fixed Reflector :: Round Satin	Ø30	L:38 x W:38 x H:25
	DLS3-40FR-CRA/30	03w	3000 K	Fixed Reflector :: Antique Brass	Ø30	L:40 x W:40 x H:25
	DLS3-40FR-CRW/65	03w	6500 K	Fixed Reflector :: Round White	Ø30	L:40 x W:40 x H:25
	DLS3-40FR-CRW/30		3000 K			
	DLS3-42FL-CRW/30	03w	3000 K	Fixed Lensed :: Round White	Ø30	L:42 x W:42 x H:38
	DLS3-42FL-CRB/30	03w	3000 K	Fixed Lensed :: Round Black	Ø30	L:42 x W:42 x H:39
	DLS3-48FR-CRW/40	03w	4000 K	Fixed Reflector :: Round White	Ø35	L:48 x W:48 x H:25
	DLS3-48FR-CRW/30	03w	3000 K			

ensuring safety and comfort...



LED SPOT LIGHT-mini CONCEAL INDOOR

Picture	Item Code	Power	CCT	Colour	Cut-out (mm)	Dimensions (mm)
	DLS3-48-MC-CW/40	03w	4000 K	Moving Cylinder :: Round White	Ø40	L:48 x W:48 x H:55
	DLS3-48-MC-CW/30	03w	3000 K	Moving Cylinder :: Round White	Ø40	L:48 x W:48 x H:55
	DLS3-52MR-CRW/60		6000 K			
	DLS3-52MR-CRW/40	03w	4000 K	Moving Reflector :: Round White	Ø45	L:52 x W:52 x H:25
	DLS3-52MR-CRW/30		3000 K			
	DLS3-60-MR-CSW/65		6500 K			
		03w		Moving Reflector :: Square White	Ø45	L:60 x W:60 x H:25
	DLS3-60-MR-CSW/30		3000 K			
	DLS3-52MR-CRA/30	03w	3000 K	Moving Reflector :: Antique Brass	Ø45	L:52 x W:52 x H:25
	DLS3-70MR-CRA/30	03w	3000 K	Moving Reflector :: Antique Brass	Ø50	L:68 x W:68 x H:60



Voltage :: 100V-265V

Lumen :: 100lm/w

APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

LED TRACK SPOT LIGHT SURFACE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
-	DLTS10-40-SRW/40	DLTS10-40-SRW/30	10w	White	L:140 x W:40 x H:180
-	DLTS10-40-SRB/40	DLTS10-40-SRB/30	10w	Black	L:140 x W:40 x H:180
DLTS10-50-SRW/65	DLTS10-50-SRW/40	DLTS10-50-SRW/30	10w	White	L:130 x W:50 x H:180
-	DLTS12-115-SRW/40	-	12w	White	L:115 x W:25 x H:138
-	DLTS12-115-SRB/40	-	12w	Black	L:115 x W:25 x H:138
DLTS20-66-SRW/65	DLTS20-66-SRW/40	DLTS20-66-SRW/30	20w	White	L:156 x W:66 x H:206
DLTS20-66-SRB/65	DLTS20-66-SRB/40	DLTS20-66-SRB/30	20w	Black	L:156 x W:66 x H:206
-	DLTS30-90-SRW/40	DLTS30-90-SRW/30	30w	White	L:180 x W:90 x H:270
-	DLTS30-90-SRB/40	DLTS30-90-SRB/30	30w	Black	L:180 x W:90 x H:270
-	DLTL-20-380-SB/40	-	10x2w	Black	L:380 x W:33 x H:47
-	DLTL-20-380-SB/40	-	10x2w	Black	L:380 x W:33 x H:47
TRACK BAR	DLTB-980-C2-WH	DLTB-980-C2-BK	-	Wh/Bk	L:980 x W:40 x H:17
TRACK BAR	DLTB-1480-C2-WH	DLTB-1480-C2-BK	-	Wh/Bk	L:1480 x W:40 x H:17
TRACK BAR	DLTB-1980-C2-WH	DLTB-1980-C2-BK	-	Wh/Bk	L:1980 x W:40 x H:17



:: 10w ::



:: 12w ::



:: 20w ::



:: 30w ::



:: 30w ::

Voltage :: 185V-265V
CCT (K) :: 6000/4000/3000K
Lumen :: 100lm/w



:: 2x10w ::



:: 2x10w ::



:: TRACK BAR ::



APPLICATIONS:: display centres, expositions, restaurants, focal points etc.

LED PANEL LIGHT RECESSED

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Frame	Cut-out (mm)	Dimensions (mm)
-	DLP3-90-CRW/30	03w	Round	Ø75	L:85 x W:85 x H:20
-	DLP3-90-CSW/30	03w	Square	Ø75	L:85 x W:85 x H:20
DLP6-87-CRW/40	-	06w	Round	Ø87	L:87 x W:87 x H:20
DLP6-120-CRW/65	DLP6-120-CRW/30	06w	Round	Ø105	L:120 x W:120 x H:20
DLP6-120-CSW/65	DLP6-120-CSW/30	06w	Square	Ø105	L:120 x W:120 x H:20
DLP10-117-RRW/60	DLP10-117-RRW/40	10w	Round	Ø110	L:117 x W:117 x H:20
DLP10-117-RSW/60	DLP10-117-RSW/30	10w	Square	Ø110	L:117 x W:117 x H:20
DLP12-170-CRW/65	DLP12-170-CRW/30	12w	Round	Ø155	L:170 x W:170 x H:20
DLP12-170-CSW/65	DLP12-170-CSW/30	12w	Square	Ø155	L:170 x W:170 x H:20
DLP16-168-RRW/60	DLP16-168-RRW/30	16w	Round	Ø155	L:168 x W:168 x H:20
DLP16-168-RSW/60	DLP16-168-RSW/30	16w	Square	Ø155	L:168 x W:168 x H:20
DLP48-595-CSW/65	DLP48-595-CSW/30	48w	Square	Ø595	L:595 x W:595 x H:25
DLP90-1195-CSW/40		90w	Rectangular	Ø1195	L:1195 x W:595 x H:30




3w/6w/12w



10w/16w



48w

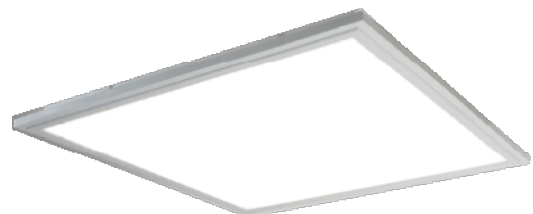

Input Voltage 85-265V at 50/60Hz
 Output Voltage 13V-25V :: 24V-43V
 Lumen Maintenance ± 5% after 8,000hrs

CCT (K) :: 6500K
 CRI :: ra>80
 Beam Angle :: 120°

CCT (K) :: 3000K
 Lumen :: 80lm/w
 PF :: >0.6 & >0.9

ensuring safety and comfort...



LED SMART DOWN LIGHT CONCEAL

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Cut-out (mm)	Dimensions (mm)
DLSD5-102-CRW/65	-	DLSD5-102-CRW/30	05w	Ø75	L:102 x W:102 x H:50
-	N03E0-1032	-	8w	Ø100	L:113 x W:113 x H:72
DLSD9-120-CRW/65	DLSD9-120-CRW/40	DLSD9-120-CRW/30	9w	Ø100	L:120 x W:120 x H:50
-	-	DLSD9-120-CRB/30	9w	Ø100	L:120 x W:120 x H:50
DLSD12-138-CRW/65	-	DLSD12-138-CRW/30	12w	Ø115	L:138 x W:138 x H:60
-	N03E0-1037	-	12w	Ø130	L:145 x W:145 x H:75
DLSD18-188-CRW/65	-	DLSD18-188-CRW/30	18w	Ø150	L:188 x W:188 x H:70



Voltage	:::	100V-265V
Beam Angle	:::	60°
CCT (K)	:::	6500K/4000K/3000K
CRI	:::	ra>80
Lumen	:::	100lm/w
PF	:::	>0.6
Appearance	:::	White/Black



:: high lumen

:: elegant look

:: focused light

:: upgraded design



APPLICATIONS::

offices, banks, hotels, display centre, public areas etc.

LED BORDERLESS DOWN LIGHT SURFACE

LED SLIM DOWN LIGHT SURFACE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power	Frame	Dimensions (mm)
DLD9-120-SRW/65	DLD9-120-SRW/40	DLD9-120-SRW/30	09w	Round	L:120 x W:120 x H:25
DLD9-120-SSW/65	DLD9-120-SSW/40	DLD9-120-SSW/30	09w	Square	L:120 x W:120 x H:25
DLD16-170-SRW/65	DLD16-170-SRW/40	DLD16-170-SRW/30	16w	Round	L:170 x W:170 x H:25
DLD16-170-SSW/65	DLD16-170-SSW/40	DLD16-170-SSW/30	16w	Square	L:170 x W:170 x H:25
DLD18-120-SRW/60	DLD18-120-SRW/40	DLD18-120-SSW/30	18w	Round	L:120 x W:120 x H:40
DLD18-120-SSW/60	DLD18-120-SSW/40	DLD18-120-SSW/30	18w	Square	L:120 x W:120 x H:40
-	DLD24-175-SRW/40	DLD24-175-SRW/30	24w	Round	L:175 x W:175 x H:40
-	DLD24-175-SSW/40	-	24w	Square	L:175 x W:175 x H:40
DLD30-300-SRW/65	-	-	30w	Round	L:300 x W:300 x H:25
DLD30-300-SSW/65	-	-	30w	Square	L:300 x W:300 x H:25



Operating Voltage 90-265V at 50/60Hz
 Lumen Maintenance ± 5% after 8,000hrs

CCT (K) :: 6500K/4000K/3000K
 CRI :: ra>80 PF :: >0.6 Lumen :: 90lm/w

ensuring safety and comfort...



LED DOWN LIGHT SURFACE

SENSOR LIGHT MIRCOWAVE

24 months warranty against any manufacturing defect.

Item Code	Power	CCT	Appearance	Operation	Dimensions (mm)
DLD6-120-SRW/65	06w	6500 K	Round :: WH	Manual	L:117 x W:117 x H:35
DLD6-120-SSW/65	06w	6500 K	Round :: WH	Manual	L:117 x W:117 x H:35
DLD12-170-SRW/65	12w	6500 K	Round :: WH	Manual	L:167 x W:167 x H:35
DLD12-170-SSW/65	12w	6500 K	Round :: WH	Manual	L:167 x W:167 x H:35
DLDS12-175-SRW/40	12w	4000 K	Round :: WH	Mircowave	L:175 x W:175 x H:25
DLDS18-225-SRW/40	18w	4000 K	Round :: WH	Mircowave	L:225 x W:225 x H:25





Input Voltage 85-265V at 50/60Hz
Output Voltage 13V-25V :: 24V-43V
Maintenance ± 5% after 8,000hrs
Beam Angle 120°
Lumen 80lm/w
PF 0.6







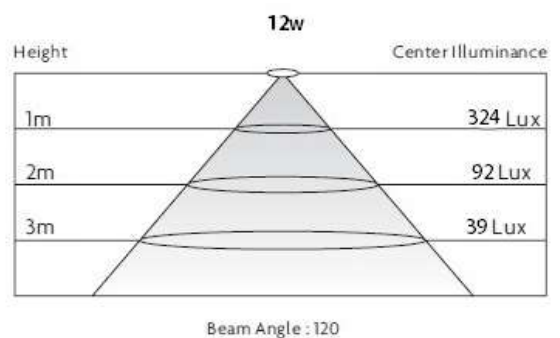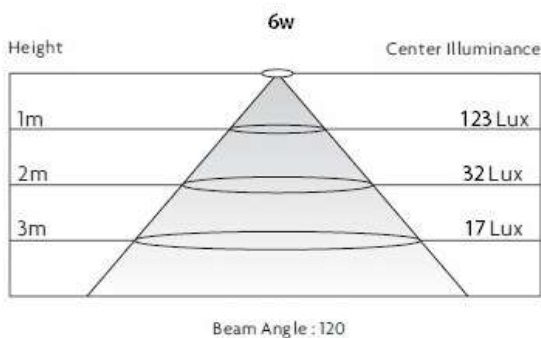










SENSOR LIGHT MIRCOWAVE

APPLICATIONS:: offices, hotels, display centre, residence, public areas etc.



LED CYLINDER LIGHT SURFACE

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Beam	Dimensions (mm)
	DLD5-60SL-SW/40	05w	4000 K	Saucer :: WH	60°	L:60 x W:60 x H:18
	DLD5-60SL-SW/30		3000 K			
	DLD5-60SL-SB/40	05w	4000 K	Saucer :: BK	60°	L:60 x W:60 x H:18
	DLD5-60SL-SB/30		3000 K			
	DLD7-85SL-SW/40	07w	4000 K	Saucer :: WH	60°	L:85 x W:85 x H:20
	DLD7-85SL-SW/30		3000 K			
	DLD7-85SL-SB/40	07w	4000 K	Saucer :: BK	60°	L:85 x W:85 x H:20
	DLD7-85SL-SB/30		3000 K			
	DLD7-54CL-SW/40	07w	4000 K	Cylinder :: WH	60°	L:53 x W:53 x H:70
	DLD7-54CL-SW/30		3000 K			
	DLD7-54CL-SB/40	07w	4000 K	Cylinder :: BK	60°	L:53 x W:53 x H:70
	DLD7-54CL-SB/30		3000 K			
	DLD12-85CR-SW/40	12w	4000 K	Cylinder :: WH	60°	L:85 x W:85 x H:137
	DLD12-85CR-SB/40		4000 K			
	DLD12-85CR-SB/40	12w	4000 K	Cylinder :: BK	60°	L:85 x W:85 x H:137
	DLD12-78FR-CB/40		4000 K			
	DLD12-78FR-CB/40	12w	4000 K	Cylinder :: BK	45°	L:78 x W:78 x H:90
	DLD12-78FS-CB/40		4000 K			
	DLD10-85FR-CW/40	10w	4000 K	Cylinder :: WH	45°	L:85 x W:85 x H:80
	DLD10-85FR-CB/40		4000 K			
	DLD15-100FR-CW/40	15w	4000 K	Cylinder :: WH	45°	L:100 x W:110 x H:110
	DLD15-100FR-CB/40		4000 K			
	DLD20-130FR-CB/40	20w	4000 K	Cylinder :: BK	45°	L:130 x W:130 x H:120
	DLD20-130FR-CB/30		3000 K			
	DLD15-130-SRW/30	15w	3000 K	Cylinder :: WH	90°	L:130 x W:130 x H:130
	DLD15-130-SRB/60		6000 K			
	DLD15-130-SRB/40	15w	4000 K	Cylinder :: BK	90°	L:130 x W:130 x H:130
	DLD15-130-SRB/30		3000 K			
	DLS12-70CF-SW/40	12w	4000 K	Cylinder :: Folding :: WH	45°	L:185 x W:70 x H:185
	DLS12-70CF-SB/30		4000 K			
	DLS12-70CF-SB/30	12w	4000 K	Cylinder :: Folding :: BK	45°	L:185 x W:70 x H:185
	DLS24-200-MR-SRB/30		3000 K			
	DLS24-200-MR-SRB/30	2 x 12w	3000 K	Rectangular :: BK	60°	L:200 x W:100 x H:100

APPLICATIONS :: Office, display centres, expositions, restaurants, focal points etc.

LED EVACUATION LIGHT

12 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Appearance	Battery	CCT	Dimensions (mm)
DLEM6-244-MP/60	06w	2 Heads ABS Matt	3.7V 3600mAh 3h	6000 K	L:244 x W:123 x H:90
DLEM6-244-MP/40	06w	2 Heads ABS Matt	3.7V 3600mAh 3h	4000 K	L:244 x W:123 x H:90
DLES2-370-A2L/60	02w	Al+Acrylic - Left	1.2V 900mAh 3h	6000 K	L:370 x W:200 x H:210
DLES2-370-A2R/60	02w	Al+Acrylic - Right	1.2V 900mAh 3h	6000 K	L:370 x W:200 x H:210
DLES2-370-A2N/60	02w	Al+Acrylic - Neutral	1.2V 900mAh 3h	6000 K	L:370 x W:200 x H:210
DLES2-352-A1N/60	02w	Aluminum - Neutral	1.2V 500mAh 2h	6000 K	L:352 x W:152 x H:80



Voltage :: 85V-265V

Lithium Ni-Cad Battery Inside



APPLICATIONS:: offices, banks, hotels, display centre, public areas etc.

ensuring safety and comfort...



AVIATION OBSTRUCTION LIGHT

12 months warranty against any manufacturing defect.

Item Code	DLAO15-300-16F/R
Power	≤15W
Flashing frequency	40 Flash/minute
Luminous intensity	≥1600cd
Luminous colour	Red
Light souce lifespan	≥50,000 hours
Emitting color	Red
Beam angle	360° horizontal beam angle, ≥10° vertical beam spread
Ingress protection	IP65
Lightning protection	4KA
Light controlled sensitivity	100Lux
Operating temperature	-55°C-55°C
Wind load	80m/sec
Dimensions	L:300 x W:300 x H:150 mm



APPLICATIONS:: offices, banks, hotels, display centre, public areas etc.

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

LED BOUNDARY LIGHT ::: UPDOWN LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLSR12-2612-1B/30	12w	EPISTAR (Taiwan)	RECTNAG. (Black)	IP65	L:260 x W:125 x H:125
DLSR8-108-SSB/30	08w	EPISTAR (Taiwan)	SQUARE (Black)	IP65	L:108 x W:108 x H:80
DLSR8-108-SSG/30	08w	EPISTAR (Taiwan)	SQUARE (Grey)	IP65	L:108 x W:108 x H:80
DLUD7-1095-1B/30	08w	EPISTAR (Taiwan)	ROUND (Black)	IP65	L:105 x W:95 x H:87
DLUD10-130-SRG/30	1x10w	BRIDGELUX (USA)	CYLINDER (Grey)	IP65	L:130 x W:90 x H:130
DLUD20-170-SRG/30	2x10w	BRIDGELUX (USA)	CYLINDER (Grey)	IP65	L:170 x W:90 x H:130
DLUD4-130-SRB/30	4x01w	CREE (USA)	ROUND (Black)	IP65	L:130 x W:130 x H:55
DLUD10-200-SRG/30	2x05w	BRIDGELUX (USA)	HYPERBOLOID (Grey)	IP65	L:200 x W:100 x H:85
DLUD10-1695-2G/30	2x05w	BRIDGELUX (USA)	RECTNAG. (Grey)	IP65	L:165 x W:95 x H:55
DLUD6-160-2G/30	2x03w	BRIDGELUX (USA)	RECTNAG. (Grey)	IP65	L:160 x W:95 x H:55
DLUD2-80-SOG/30	2x01w	CREE (USA)	OVAL (Black)	IP65	L:80 x W:80 x H:34
DLUD6-170-SOG/30	6x01w	CREE (USA)	OVAL (Grey)	IP65	L:170 x W:70 x H:40
DLSC6-100-SSG/30	2x03w	BRIDGELUX (USA)	RECTNAG. (Black)	IP66	L:100 x W:100 x H:50
DLUD3-87-SSG/30	1x03w	CREE (USA)	RECTNAG. (Black)	IP65	L:82 x W:78 x H:65
DLUD6-162-SRG/30	2x03w	CREE (USA)	RECTNAG. (Black)	IP65	L:162 x W:80 x H:65
DLUD3-9545-2B/30	2+1w	CREE (USA)	RECTNAG. (Black)	IP65	L:85 x W:47 x H:54

Voltage ::: 85V-265V

CCT (K) ::: 3000K



:: Security Light



8w

:: Updown Light




1x8w



1x10w



2x10w




4x1w



2x5w



2x5w

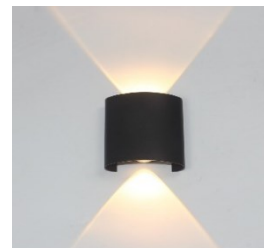


2x3w




6x1w




2x5w



1x3w



2x3w



2+1w

APPLICATIONS ::: Boundry wall, Building Façade or any outdoor location need to be illuminated.

LED BOUNDARY / GATE LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Category	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLWB10-200-PB/30	10w	BRIDGELUX (USA)	Pyramid :: Black	IP65	L:200 x W:200 x H:370
DLSR10-200-SRG/30	10w	BRIDGELUX (USA)	ROUND (Black)	IP65	L:200 x W:130 x H:70
DWB-150-A127/OB	1xE27	BRIDGELUX (USA)	Oval :: Black	IP54	L:150 x W:125 x H:280
DWB-125-P127/SB	1xE27	BRIDGELUX (USA)	Square :: Black	IP54	L:150 x W:170 x H:375



1x10w



1x10w



Voltage ::: 85V-265V

CCT (K) ::: 3000 K

CRI ::: ra>80

Lumen ::: 60-80lm/w

PF ::: >0.6

Avg, Lifetime ::: 30,000hrs

Appearance ::: Black

APPLICATIONS :: Wall, commercial buildings, hotels, residence etc.

LED GARDEN LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	LED Brand	Beam	Appearance	Protection	Dimensions (mm)
DLGL3-75-SRG/30	03w	OSRAM (Germany)	24°	Round :: Grey	IP66	L:140 x W:75 x H:280
DLGL5-68-SRG/30	05w	BRIDGELUX (USA)	45°	Round :: Grey	IP66	L:105 x W:68 x H:270
DLGL6-62-SRG/30	06w	PHILIPS (PRC)	38°	Round :: Grey	IP65	L:100 x W:62 x H:70
DLGL6-60-SSG/30	06w	PHILIPS (PRC)	38°	Square :: Grey	IP65	L:70 x W:60 x H:90
DLGL12-60-SRG/30	12w	OSRAM (Germany)	30°	Round :: Grey	IP65	L:130 x W:60 x H:250
DLGL12-115-SRG/30	12w	BRIDGELUX (USA)	45°	Round :: Grey	IP66	L:83 x W:115 x H:150

::: Garden Light



3w



6w



6w



12w



12w



Voltage	:::	85V-265V
CCT (K)	:::	3000 K
CRI	:::	ra>80
Lumen	:::	60-80lm/w
PF	:::	>0.6
Avg, Lifetime	:::	20,000hrs
Appearance	:::	Grey

APPLICATIONS :: Garden, Lawn, Walkway, Up tree lighting, any outdoor location need to be illuminated.

ensuring safety and comfort...



LED BOLARD LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Category	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLBL10-6016-2G/30	10w	BRIDGELUX (USA)	Rectangular :: Grey	IP65	L:160 x W:45 x H:600
DLBL7-3016-SRG/30	07w	BRIDGELUX (USA)	Rectangular :: Grey	IP65	L:160 x W:45 x H:300
DLBL12-6010-4G/30	12w	BRIDGELUX (USA)	Round :: Grey	IP65	L:108 x W:108 x H:600
DLGP12-3015-SRG/30	12w	BRIDGELUX (USA)	Round :: Grey	IP65	L:150 x W:150 x H:300
DLGP12-3015-SSG/30	12w	BRIDGELUX (USA)	Square :: Grey	IP65	L:150 x W:150 x H:300



Voltage	:::	85V-265V
CCT (K)	:::	3000 K
CRI	:::	ra>80
Lumen	:::	60-80lm/w
PF	:::	>0.6
Avg, Lifetime	:::	30,000hrs
Appearance	:::	Grey

APPLICATIONS :: Garden, Lawn, Walkway, Tree lighting, any outdoor location need to be illuminated.

ensuring safety and comfort...




STAIRCASE LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Item Code (WARM)	Power (Rated)	Appearance	Protection	Dimensions (mm)
DLSC3-86-CRG/30	DLSC3-86-CRG/30	03w	Round :: Grey	IP65	L:86 x W:86 x H:55
DLSC3-86-CSG/30	DLSC3-86-CSG/30	03w	Square :: Grey	IP65	L:86 x W:86 x H:55
DLSC3-185-CRG/30	DLSC3-185-CRG/30	03w	Rectangular :: G	IP65	L:185 x W:40 x H:48
DLSC3-90-CRB/30	DLSC3-90-CRB/30	03w	Square :: Black	IP65	L:90 x W:90 x H:55
DLSC3-145-CRG/30	DLSC3-145-CRG/30	03w	Rectangular :: G	IP65	L:145 x W:45 x H:70
DLSC6-117-SRG/30	DLSC6-117-SRG/30	06w	Square :: Grey	IP65	L:117 x W:117 x H:33

:: Staircase Light

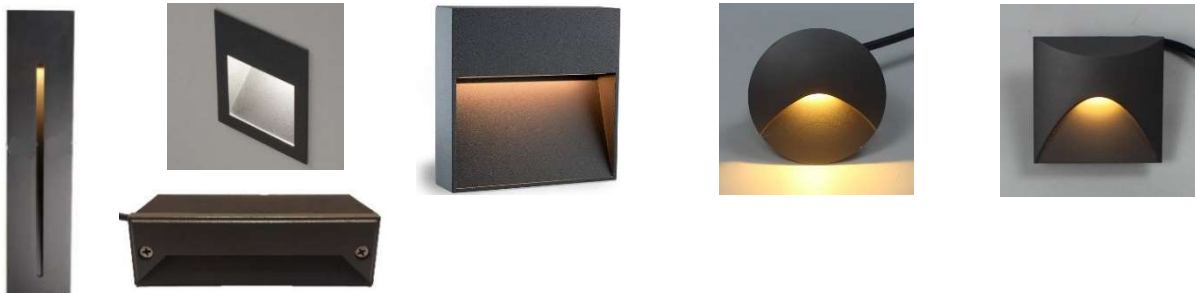

Voltage ::: 85V-265V
Beam Angle ::: 15° - 90°
CCT (K) ::: 3000 K

Lumen ::: 80-90lm/w
PF ::: >0.6
Appearance ::: Grey/Black

LED INGROUND LIGHT OUTDOOR WATER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	Voltage	Beam	Protection	Dimensions (mm)
DLIG1-42-22-CRS/30	01w	85V-265V	30°	IP67	L:42 x W:42 x H:80
DLIG1-42-12-CRS/30	01w	12V	30°	IP68	L:42 x W:42 x H:80
DLIG1-52-22-CRS/30	01w	85V-265V	30°	IP68	L:52 x W:52 x H:80
DLIG3-52-22-CRS/30	03w	85V-265V	30°	IP67	L:52 x W:52 x H:80
DLIG3-52-12-CRS/30	03w	12V	30°	IP68	L:52 x W:52 x H:80
DLIG3-75-22-CRS/30	03w	85V-265V	30°	IP68	L:75 x W:75 x H:98
DLIG3-100-22-CRS/30	03w	85V-265V	30°	IP68	L:100 x W:100 x H:75
DLIG6-125-CRSN/27	06w	85V-265V	30°	IP68	L:125 x W:125 x H:90
DLIG7-100-22-CRS/30	07w	85V-265V	60°	IP67	L:100 x W:100 x H:80
DLIG15-150-22-CRS/30	15w	85V-265V	60°	IP67	L:150 x W:150 x H:92
DLIG3-152-22-CRS/30	03w	85V-265V	1D x 30°	IP68	L:52 x W:52 x H:80
DLIG3-252-22-CRS/30	03w	85V-265V	2D x 30°	IP68	L:52 x W:52 x H:80

TRANSFORMER options

DLT5-12-68/B	05VA 12V IP68 L:46 x W:39 x H:36	DLT30-12-68/B	30VA 12V IP68 L:110 x W:72 x H:74
DLT10-12-68/B	10VA 12V IP68 L:81 x W:51 x H:63	DLT40-24-68/B	40VA 12V IP68 L:110 x W:72 x H:74



::: Inground Light

::: Inground Light



::: Inground Light

::: Inground Light -Directional



1w

3w

1w

3w

1/3w

6w

Beam Angle :: 30°-60°

Appearance :: SS



7w

15w



3w

3w

APPLICATIONS :: Swimming Pool, Fountain, any other artificial under water location

ensuring safety and comfort...



LED UNDER WATER LIGHT WATER PROOF

24 months warranty against any manufacturing defect.

Item Code	Power	Voltage	LED Brand	Protection	Dimensions (mm)
DLIG1-42-12-CRS/30	01w	12V/24V	CREE (USA)	IP68	L:42 x W:42 x H:80
DLIG3-52-12-CRS/30	03w	12V/24V	CREE (USA)	IP68	L:52 x W:52 x H:80
DLIG3-100-12-CRS/30	03w	12V/24V	BRIDGELUX (USA)	IP68	L:100 x W:100 x H:75
DLIG6-125-12-CRS/30	06w	12V/24V	BRIDGELUX (USA)	IP68	L:125 x W:125 x H:85
DLUW3-82-SRS/30	03w	12V	BRIDGELUX (USA)	IP68	L:82 x W:82 x H:150
DLUW6-120-SRS/30	06w	12V	BRIDGELUX (USA)	IP68	L:120 x W:120 x H:150
DLUW6-125-SRSN/27	06w	12V	EPISTAR (Taiwan)	IP68	L:125 x W:125 x H:180
DLUW6-120-SRS/RGB	06w	12V	BRIDGELUX (USA)	IP68	L:120 x W:120 x H:155
DLUW9-145-SRS/RGB	09w	12V	BRIDGELUX (USA)	IP68	L:145 x W:145 x H:170
DLUW8-120-CRS/30	08w	12V	BRIDGELUX (USA)	IP68	L:120 x W:120 x H:110
DLUW24-230-CRS/30	24w	12V	BRIDGELUX (USA)	IP68	L:230 x W:230 x H:110
DLUW18-290-SRC/30	18w	12V/24V	EPISTAR (Taiwan)	IP68	L:277 x W:277 x H:60
DLUW36-290-SRC/30	36w	12V/24V	EPISTAR (Taiwan)	IP68	L:277 x W:277 x H:60

TRANSFORMER options

DLT5-12-68/B	05VA 12V IP68 L:46 x W:39 x H:36	DLT20-24-68/B	20VA 24V IP68 L:110 x W:70 x H:74
DLT10-12-68/B	10VA 12V IP68 L:81 x W:51 x H:63	DLT40-24-68/B	40VA 24V IP68 L:110 x W:70 x H:74
DLT30-12-68/B	30VA 12V IP68 L:110 x W:72 x H:74	DLT105-12-44/B	100w 12V IP44 L:160 x W:130 x H:80
DLT40-12-68/B	40VA 12V IP68 L:110 x W:72 x H:74	DLT200-12-44/B	200w 12V IP44 L:160 x W:130 x H:80
DLT10-24-68/B	10VA 24V IP68 L:81 x W:51 x H:63	DLT600-12-44/B	600w 12V IP44 L:180 x W:150 x H:90



8w/24w



18w/36w



::: Inground Light

::: Inground Light

::: Under Water Light

::: Under Water Light

1w



3w



6w



3w

3w



6w



9w



6w

APPLICATIONS :: Swimming Pool, Fountain, any other artificial under water location

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

ensuring safety and comfort...



LED FLOOD LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	LED Brand	Beam	Dimensions (mm)
DLF10-150-SG/60	DLF10-150-SG/30	10w	EPISTAR (Taiwan)	90°	L:150 x W:113 x H:43
DLF20-163-SG/60	DLF20-163-SG/30	20w	EPISTAR (Taiwan)	90°	L:163 x W:139 x H:28
DLF30-170-SG/60	DLF30-170-SG/30	30w	EPISTAR (Taiwan)	90°	L:187 x W:170 x H:40
-	DLF50-140-C30G/27	50w	SANAN (China)	30°	L:140 x W:160 x H:95
-	DLF50-190-C08G/30	50w	SANAN (China)	8-16°	L:190 x W:210 x H:110
DLF50-210-SG/60	DLF50-223-SLG/30	50w	EPISTAR (Taiwan)	90°	L:240 x W:210 x H:45
DLF100-295-SG/60	DLF100-276-SLG/30	100w	EPISTAR (Taiwan)	90°	L:295 x W:255 x H:55
DLF200-345-SG/60	DLF200-350-SLG/30	200w	EPISTAR (Taiwan)	90°	L:345 x W:375 x H:58



50/100/200w




50w Beam 30°

Voltage	:::	85V-265V
Protection	:::	IP66/IP67
CCT (K)	:::	6000/3000/2700K
LED Chips	:::	EPISTAR (Taiwan)
Lumen	:::	100-110lm/w
CRI	:::	ra>80
PF	:::	>0.90
Frame	:::	Rectangular
Appearance	:::	Black / Grey

LED FACADE LIGHT :: AREA LIGHT OUTDOOR - high power

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Brand	Beam Angle	Protection	Dimensions (mm)
DLF18-125-10G/30	18w	BRIDGELUX (USA)	10°	IP66	L:125 x W:125 x H:70
DLF50-154-10G/30	50w	BRIDGELUX (USA)	10°	IP66	L:154 x W:154 x H:100
DLF400-543-10B/30	400w	OSRAM	10°	IP66	L:543 x W:100 x H:000
DLF400-543-30B/30	400w	CREE (USA)	30°	IP66	L:530 x W:300 x H:180
DLF1000-470-SB/60	800/1000w	CREE (USA)	10°/30°/60°	IP66	L:470 x W:543 x H:250

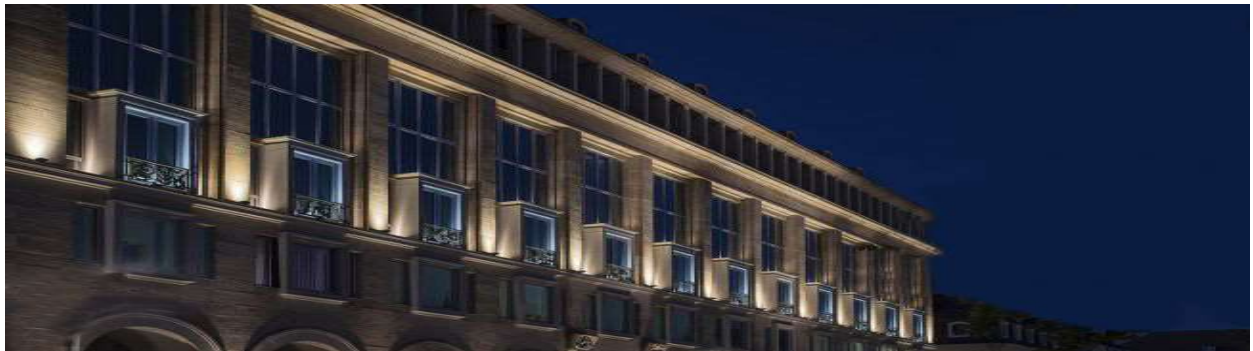

18w



50w



400w



400w



2x400/500w

Voltage	:::	85V-265V
Protection	:::	IP65/IP66
CCT (K)	:::	6000 K
Lumen	:::	110lm/w
CRI	:::	ra>80
PF	:::	>0.95
Frame	:::	Rectangular
Appearance	:::	Black/Grey



APPLICATIONS::

Construction Area, Playing Ground, Mines, Industries, Façade Lighting etc.

ensuring safety and comfort...



LED WALL WASHER (SURFACE & INGROUND)

24 months warranty against any manufacturing defect.

Item Code	Power	Beam Angle	LED Brand	Protection	Dimensions (mm)
DLWW12-4046-SG/30	12w	30°	EPISTAR (Taiwan)	IP65	L:495 x W:40 x H:46
DLWW18-4048-SG/27	18w	30°	EPISTAR (Taiwan)	IP65	L:980 x W:40 x H:48
DLWW24-4048-SG/30	24w	30°	EPISTAR (Taiwan)	IP65	L:980 x W:40 x H:48
DLIG6-300FG-CF/30	06w	60°	EPISTAR (Taiwan)	IP67	L:300 x W:50 x H:65
DLIG9-300-22CS/30	09w	30°	EPISTAR (Taiwan)	IP67	L:300 x W:90 x H:80
DLIG12-500-22-CRS/30	12w	30°	CREE (USA)	IP67	L:500 x W:90 x H:80
DLIG36-1000-22-CRS/30	24w	30°	OSRAM (Germany)	IP67	L:1000 x W:90 x H:75

:: 18w/24w Surface



180V-260V


:: 6w Inground



:: 9w Inground



:: 12w Inground




:: 24w Inground



Lumen :: 90lm/w

PF :: >0.6

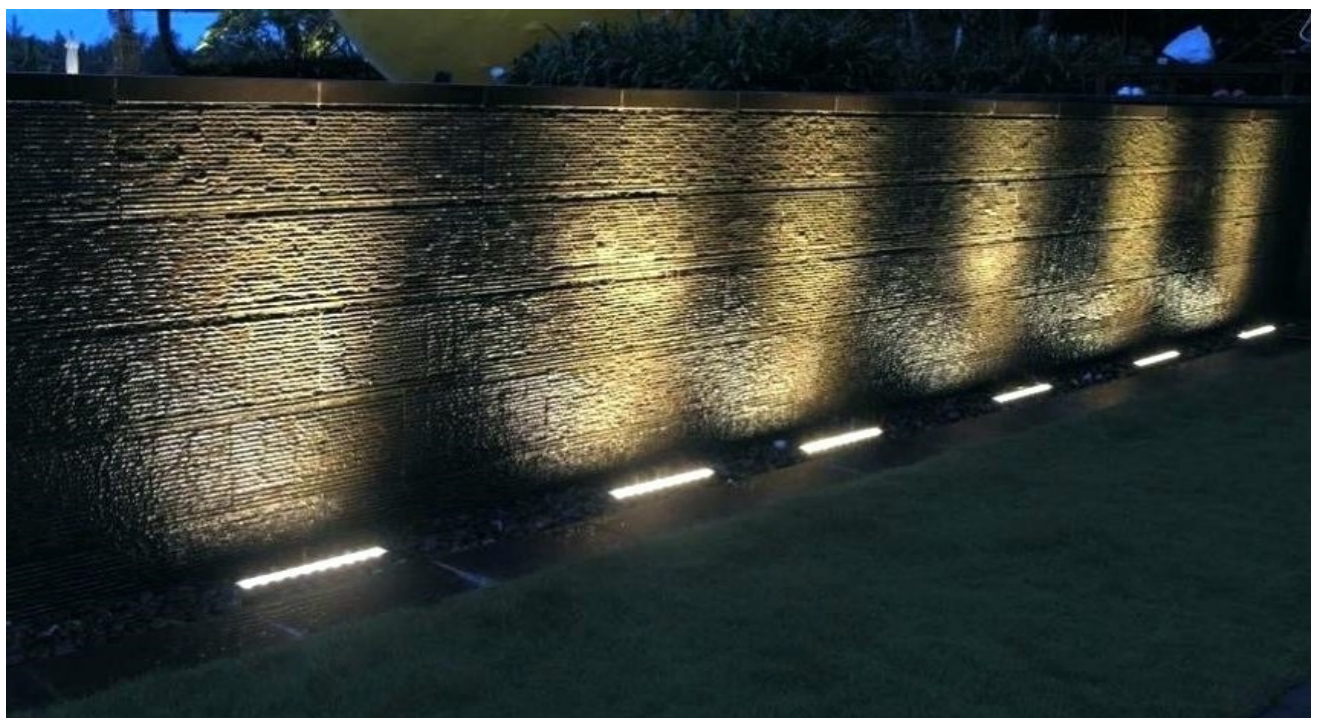

APPLICATIONS :: Wall, bridge, park, commercial buildings, hotels, residence etc.

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.


sales@decentdistributions.com
+88 01711009624, 01711021768

LED STREET LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Chip Type	LED Brand	Beam	Dimensions (mm)
DLST40-330-SG//40	40w	SMD	EPISTAR	140°*70°	L:330 x W:150 x H:65
DLST60-375-SG//40	60w	SMD	EPISTAR	140°*70°	L:375 x W:150 x H:65
DLST100-525-SG//40	100w	SMD	EPISTAR	140°*70°	L:525 x W:180 x H:75
DLST150-650-SG//40	150w	SMD	EPISTAR	140°*70°	L:650 x W:260 x H:95
DLST200-700-SG//40	200w	SMD	EPISTAR	140°*70°	L:700 x W:260 x H:95
DLST100-630-CG//60	100w	COB	EPISTAR	120°	L:630 x W:315 x H:90
DLST150-740-CG//60	150w	COB	EPISTAR	120°	L:740 x W:315 x H:90
DLST100-650-CG//60	100w	COB	EPISTAR	120°	L:650 x W:250 x H:90
DLST150-800-CG//60	150w	COB	EPISTAR	120°	L:800 x W:310 x H:130

Available in a variety of sizes

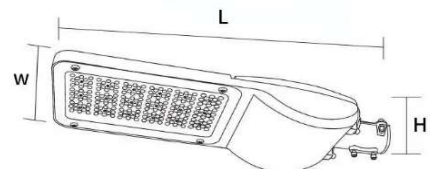

100W COB



150W COB




LED HIGH BAY LIGHT INDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Brand	Beam Angle	Reflector	Dimensions (mm)
DLHB100-375-PB/50	100w	EPISTAR (Taiwan)	30°	Lens	D:375 x H:121
DLHB100-410-SF/60	100w	EPISTAR (Taiwan)	30°	Fish Scale	D:410 x H:446
DLHB100-410-SM/60	100w	EPISTAR (Taiwan)	30°	Matt	D:410 x H:446
DLHB150-502-SF/60	150w	EPISTAR (Taiwan)	30°	Fish Scale	D:502 x H:390
DLHB150-502-SM/60	150w	EPISTAR (Taiwan)	30°	Matt	D:502 x H:390

	LED Chip :::: EPISTAR SMD2835	
	Driver :::: Isolated (Constant)	
	Voltage :::: 100V~300V	
	CCT (K) :::: 5000K	
	CRI :::: ra>90	
	Lumen :::: 110lm/w	
	PF :::: >0.95	
	Temperature :::: - 30°C to +70°C	
	Protection :::: IP44	
	Average Life :::: 30,000 hrs.	
	Certification :::: CE, RoSH, TuV	

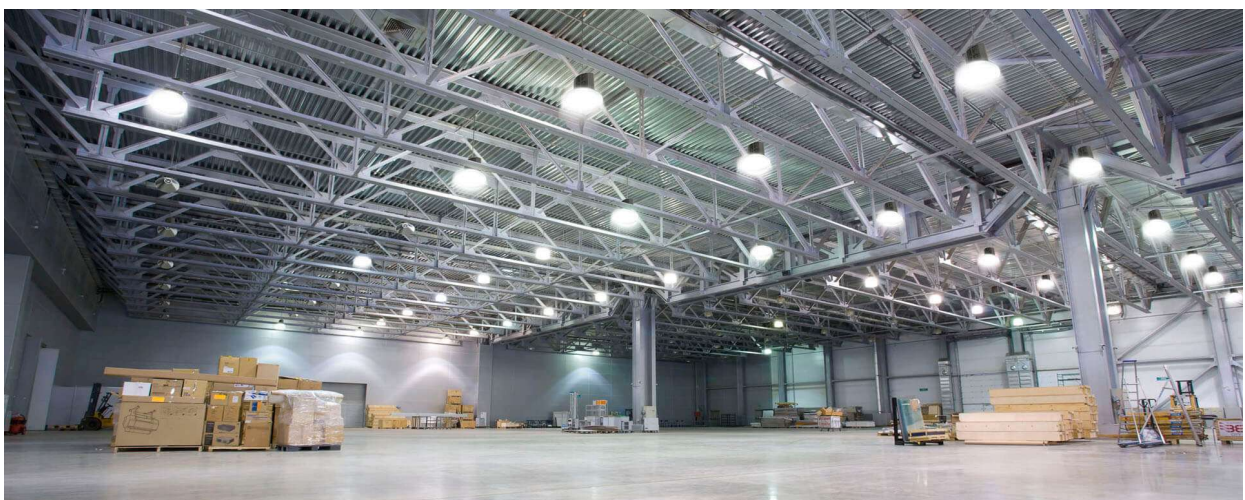

APPLICATIONS::

Suitable for lighting in workshops, warehouses, factories, gas stations, supermarkets etc.

LED BULB INDOOR

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Frame	CRI	Dimensions (mm)
DLMR5-50-SG-5.3/65	DLMR5-50-SG-5.3/30	05w	Round	ra>80	L:50 x W:50 x H:53
DLB12-27C33/65	DLB12-27C33/30	12w	Round	ra>80	L:105 x W:33 x H:105
DLB15-27A70/65	-	15w	Round	ra>80	L:127 x W:68 x H:127
DLB18-27A80/65	-	18/20w	Round	ra>80	L:153 x W:80 x H:153



::: Poly Carbonate + Alluminum body with acrylic cover :::

- Voltage* ::: 90V-265V
- Protection* ::: IP50
- Beam Angle* ::: 90° - 180°
- CCT (K)* ::: 6500/3000K
- Lumen* ::: 90lm/w
- PF* ::: >0.9
- Appearance* ::: White



APPLICATIONS :: offices, restaurants, hotels, residence, display centre, public areas etc.