

Company Name : DECENT DISTRIBUTIONS LTD.

Corporate Office : House 102/1, Road 8/A (new), West Dhanmondi, Dhaka-1209, Bangladesh

Joint Stock Incorporation : C-68799/2007

Incorporated on : 24 October, 2007

Registered Trademark : **DECENT®**

Established	in 2007	1.5 thousand	Product SKUs
SIMON exclusive distributor	from 2021	8 thousand f ²	Warehouse area
Product assembling started	in 2025	24 hours	to solve your 80% warranty claims
Electrical brand ranking in corporate	top 5	delivery is FREE	Inside the Dhaka metropolitan city

VISION

Ensuring safety & comfort with an aesthetic touch in your life.

History

Decent Distributions Ltd. (DDL) started its journey in 2007 with aspiration to inaugurate new technologies for you with a better choice. Product lines are based on contemporary LED lights, suitable to use in your commercial spaces, industries and residences. We have created a family of products and experiences that help lighting professionals imagine and design their own composition of light for modern living and get necessary advice from our team.


Over the last 18 years DECENT® brand has created a loyal customer group who are more of quality and design conscious. These frequent user group has ultimately proven DECENT® product's long lasting with high lumen output and aesthetic outlook features. We are continuously concentrating to make better technologies available at reasonable price all over the country.

Some of our prominent customers

DEVELOPERS



INTERIOR COMPANIES



The block contains six logos of partner companies arranged in two rows. The top row features BEXIMCO (blue stylized text), S. ALAM GROUP (red and orange stylized 'S' and 'A' with 'S. ALAM GROUP' in black text below), and EDISON GROUP (blue 'EDISON' and grey 'GROUP'). The bottom row features NICE DENIM MILLS LTD. (blue 'Nice' and 'Denim' with 'MILLS LTD.' below), Divine (green and yellow stylized 'D' with 'Divine' in white text inside), and NAHAR AGRO (green stylized 'N' and 'A' with 'NAHAR AGRO' in red text below, and the tagline 'We Stand Ahead in Quality and Integrity' in green script).

DECENT DISTRIBUTIONS LTD.


House 102/1, Road 8/A (new), West Dhanmondi
Dhaka 1209, Bangladesh

Email : sales@decentdistributions.com

Cell : +880 1711 009624, +880 1711 021768



<https://www.facebook.com/decentdistributions>

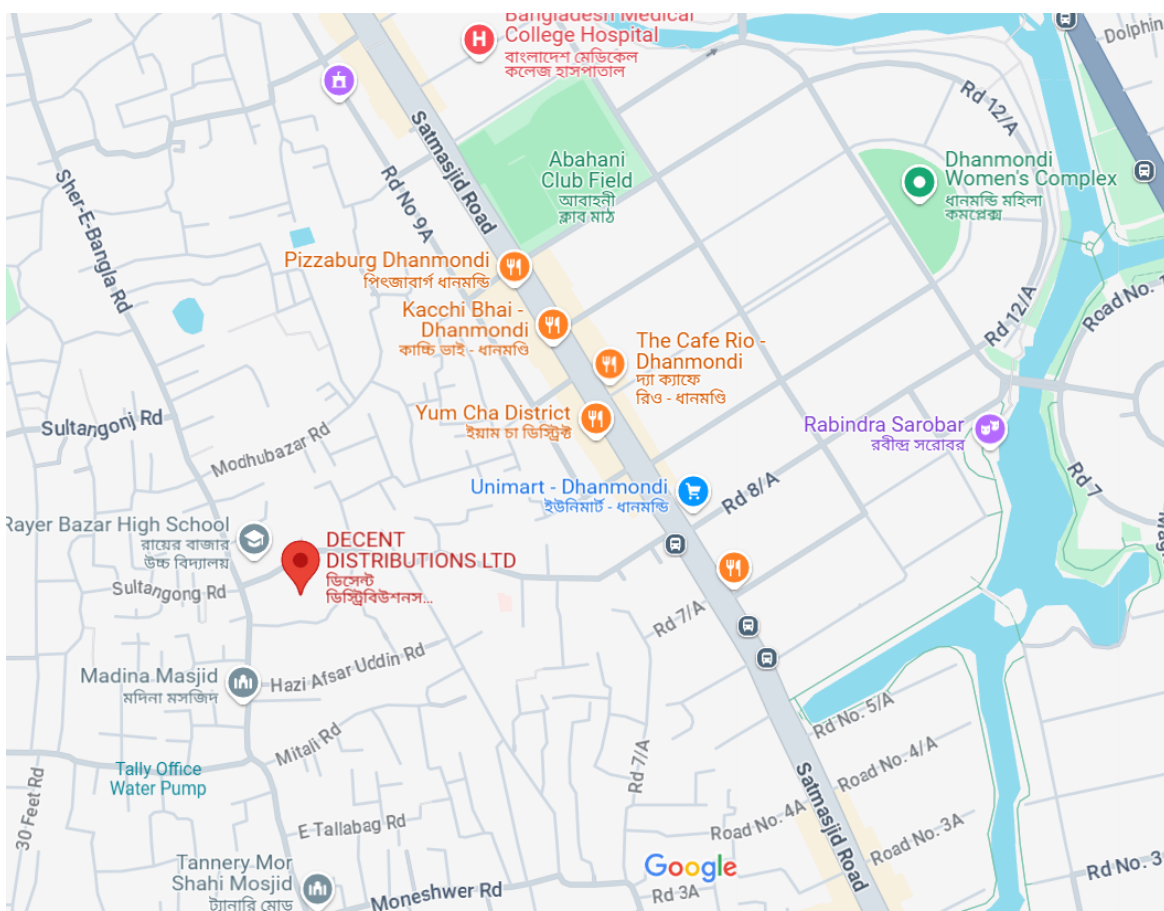

www.decentdistributions.com


ensuring safety and comfort...



LED LINEAR LIGHT - T1

24 months warranty against any manufacturing defect.



Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL40-1140-PRW/60	DLL40-1140-PRW/40	DLL40-1140-PRW/30	40w	White	L:1140 x W:60 x H:80
DLL40-1140-PRB/60	DLL40-1140-PRB/40	DLL40-1140-PRB/30	40w	Black	L:1140 x W:60 x H:80

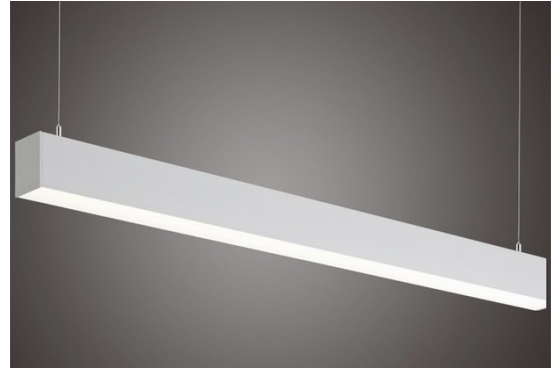

Eye friendly
Anti-glare
Shadowless
Uniformity
Linkable
Elegant Look

LED Chips brand :: SAMSUNG (Korea) || Driver :: Lifud

Aluminium body-screwless design-Germany diffuser

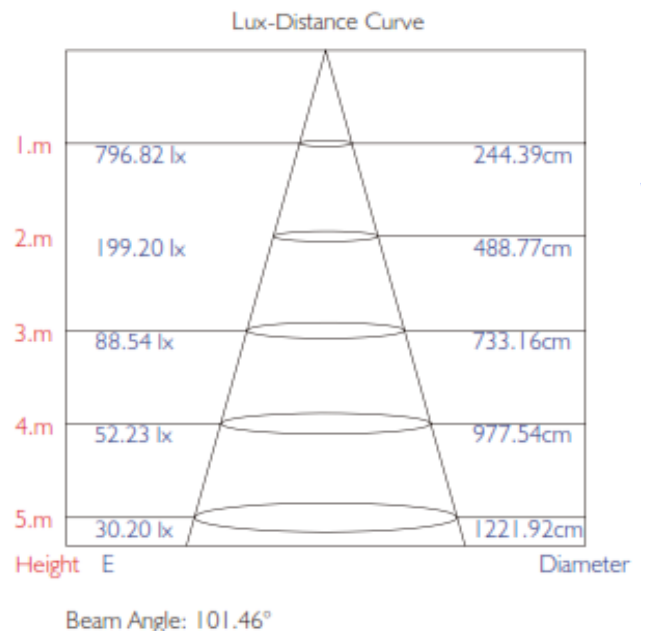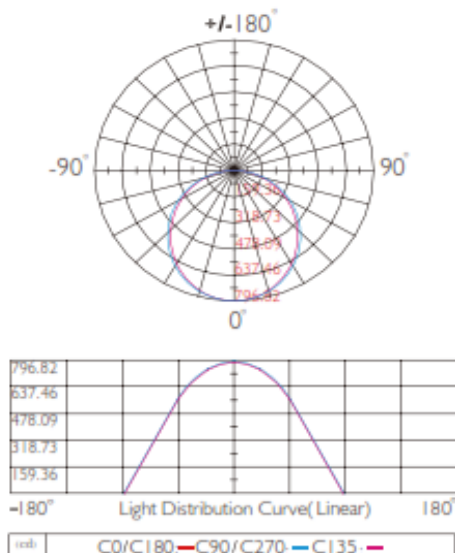

Voltage 180-265V at 50/60Hz
mA 1000mA
PF >0.9
Lifetime 30,000hrs



Beam Angle 100°
CRI ra>80
Available CCT 6000K/4000K/3000K
Lumen 4000lm

APPLICATIONS:: offices, hotels, display centre, public areas etc.


House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

ensuring safety and comfort...



LED LINEAR LIGHT - T1

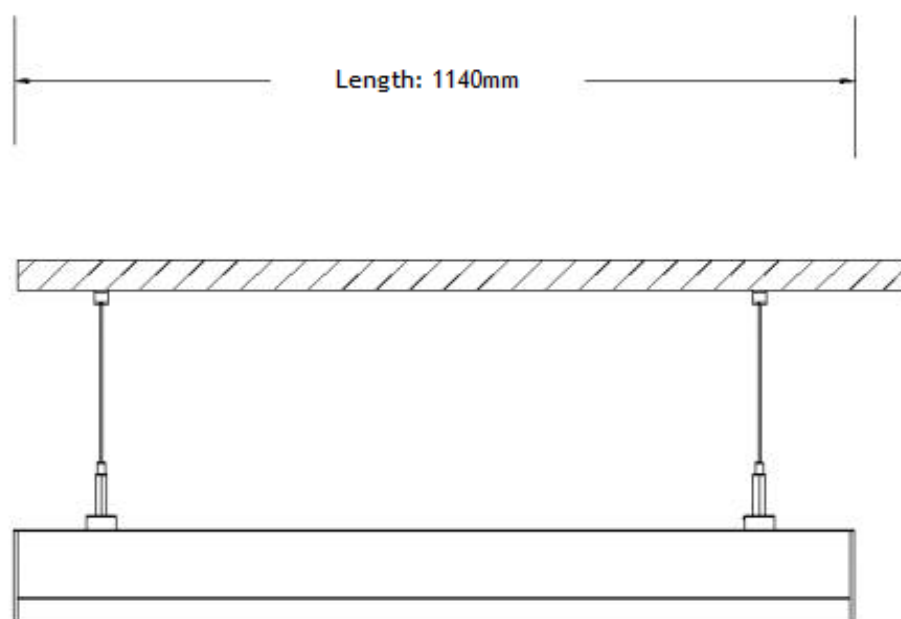

W: 60




H: 80mm

LED LINEAR LIGHT - T2

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL30-1185-PRW/65	DLL30-1185-PRW/40	DLL30-1185-PRW/30	30w	White	L:1185 x W:50 x H:60
DLL30-1185-PRB/65	DLL30-1185-PRB/40	DLL30-1185-PRB/30	30w	Black	L:1185 x W:50 x H:60
-	DLL60-2370-PRW/40	-	60w	White	L:2370 x W:50 x H:60
-	DLL60-2370-PRB/40	-	60w	Black	L:2370 x W:50 x H:60

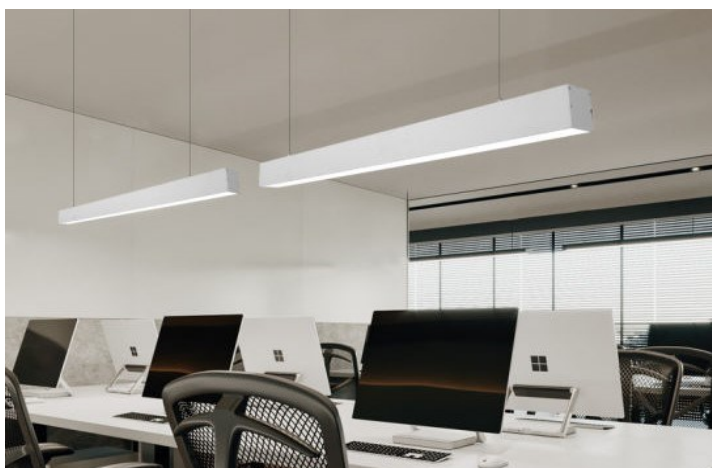

APPLICATIONS::

offices, hotels, display centre, public areas etc.


Eye friendly

Anti-glare

Shadowsless

Uniformity

Linkable

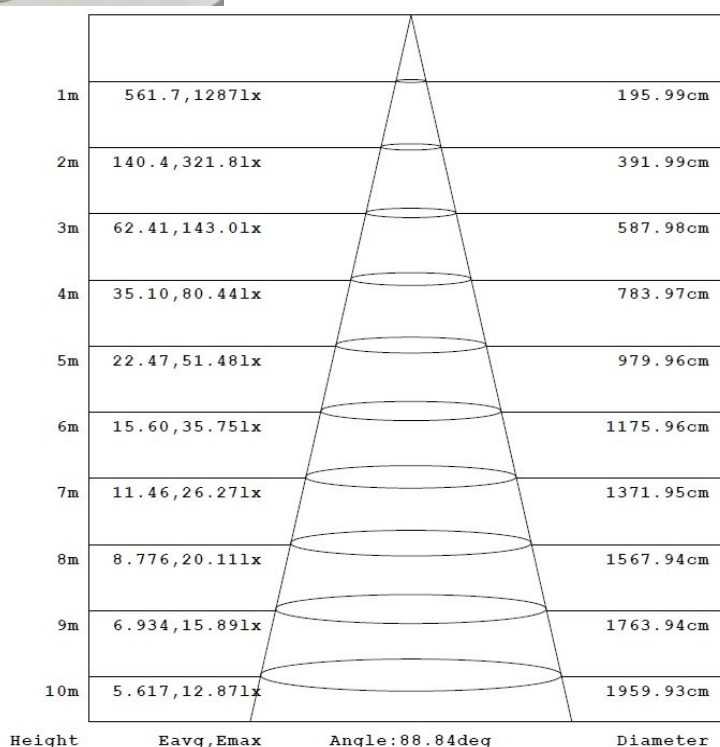

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Voltage	100-265V at 50/60Hz
mA	312mA
PF	>0.5
Lifetime	20,000hrs



Beam Angle	90°
CRI	ra>80
CCT	6500K/4000K/3000K
Lumen	3000lm

ensuring safety and comfort...



LED LINEAR/HANGING LIGHT - T3

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Appearance	Material	Dimensions (mm)
DLL36-1240-80W/40	36w	Frosted Tubular diffuser :: WH	PMMA+Acrylic	L:1240 x W:80 x H:90
DLHL38-1200-330T/40	38w	Transparent Acrylic diffuser	Acrylic	L:1200 x W:330 x H:180



Voltage	180-265V 50Hz
mA	1000mA
PF	>0.9
Lifetime	20,000hrs
Beam Angle	360°
CRI	ra>80
Available CCT	4000K
Lumen/w	130lm

Voltage	185-265V 50Hz
mA	200mA
PF	>0.6
Lifetime	20,000hrs
Beam Angle	180°
CRI	ra>80
Available CCT	4000K
Lumen/w	30lm

APPLICATIONS::

offices, banks, hotels, display centre, super market, public areas etc.

ensuring safety and comfort...



LED LINEAR LIGHT / LED CLEAN LIGHT - T4

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Appearance	Material	Dimensions (mm)
DLL50-1185-PRW/30	50w	White	Alum+Acrylic	L:1185 x W:100 x H:45
DLC36-1103-SRW/40	36w	White	ABS+Acrylic	L:1107 x W:50 x H:35
DLC18-503-SRW/40	18w	White	ABS+Acrylic	L:503 x W:50 x H:35
DLC40-1200-SOW/65	40w	White	Aluminium+Acrylic	L:1200 x W:73 x H:25
DLC40-1200-SOS/65	40w	Silver	Aluminium+Acrylic	L:1200 x W:73 x H:25
DLC18-600-SOW/65	18w	White	Aluminium+Acrylic	L:600 x W:73 x H:25



36w & 18w

40w & 18w



Voltage 100V/160-260V
CCT (K) :: 6500/4000 K

Lumen :: 80lm/w
Appearance :: White

:: continuous line

:: Installation 3 ways

:: 4 dimensional illumination

APPLICATIONS::

offices, banks, hotels, display centre, super market, public areas etc.





House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

LED HANGING RING /SQUARE/ ROUND SOLID LIGHT

24 months warranty against any manufacturing defect.

Item Code (COOL)	Item Code (WARM)	Power (Rated)	LED Brand	Appearance	Dimensions (mm)
DLR36-600-3540B/40	DLR36-600-3540B/30	36w	OSRAM (Germany)	Ring (Black)	L:600 x W:35 x H:40
DLR50-800-3540B/40	DLR50-800-3540B/30	50w	OSRAM (Germany)	Ring (Black)	L:800 x W:35 x H:40
DLR60-1000-3540B/40	DLR60-1000-3540B/30	60w	OSRAM (Germany)	Ring (Black)	L:1000 x W:35 x H:40
DLHS40-600-2050BR/40	-	40w	SAN'AN (China)	Square (Bronze)	L:600 x W:20 x H:50
DLHL42-600RB/40	-	42w	OSRAM (Germany)	Round (Black)	L:600 x W:600 x H:70
DLHL125-1000RB/40	-	125w	OSRAM (Germany)	Round (Black)	L:1000 x W:1000 x H:70
DLHL160-1200RB/40	-	160w	OSRAM (Germany)	Round (Black)	L:1200 x W:1200 x H:70

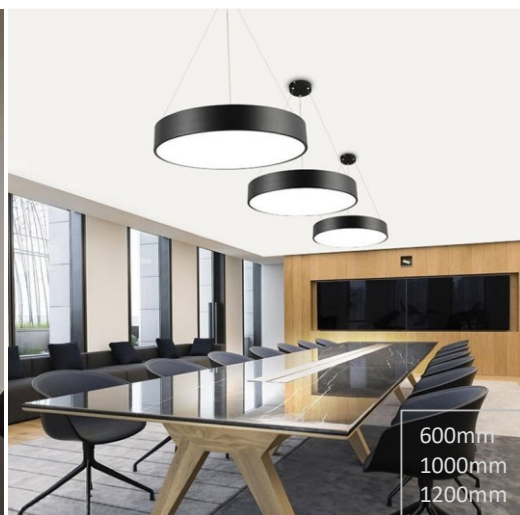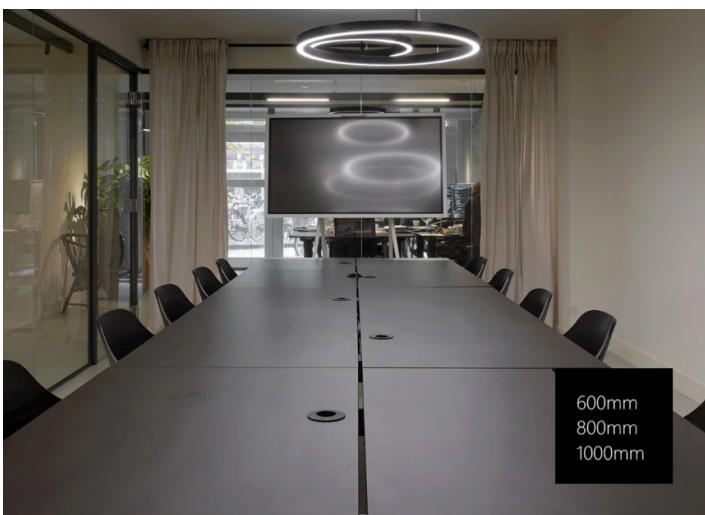

Voltage :: 100-265V
PF :: >0.9
Lifetime :: 30000hrs

CCT :: 4000 K/3000 K
CRI :: ra>80
Lumen/w :: 100-120lm/w

APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

LED HANGING LIGHT - multi shape


24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Base	Appearance	CCT	Dimensions (mm)
DLH7-4032-PRW/40	07w	Round	Pipe (White)	4000 K	L:320 x W:40 x H:1000
DLH7-4032-PRB/40	07w	Round	Pipe (Black)	4000 K	L:320 x W:40 x H:1000
DLH5-5032-PRW/40	05w	Round	Pipe (white)	4000 K	L:505 x W:30-10 x H:1000
DLH5-5032-PRB/40	05w	Round	Pipe (Black)	4000 K	L:505 x W:30-10 x H:1000
DLH15-8020-PRW/40	15w	Round	Pipe (white)	4000 K	L:200 x W:80 x H:1000
DLH15-8020-PRB/40	15w	Round	Pipe (black)	4000 K	L:200 x W:80 x H:1000
DLH15-200-PRW/30	15w	Round	Crystal PC	3000 K	L:200 x W:200 x H:1000
DLH5-230-PDC/30	05w	Round	Dome (Clear glass)	3000 K	L:70 x W:230 x H:1000
DLH5-230-PDS/40	05w	Round	Dome (Smoked Grey)	4000 K	L:70 x W:230 x H:1000
DLFB6-27G95/30	06w	Round	(Antic Brass)	3000 K	L:95 x W:95 x H:1000

Voltage :: 85V-265V

Lumen :: 80lm/w

PF :: >0.6

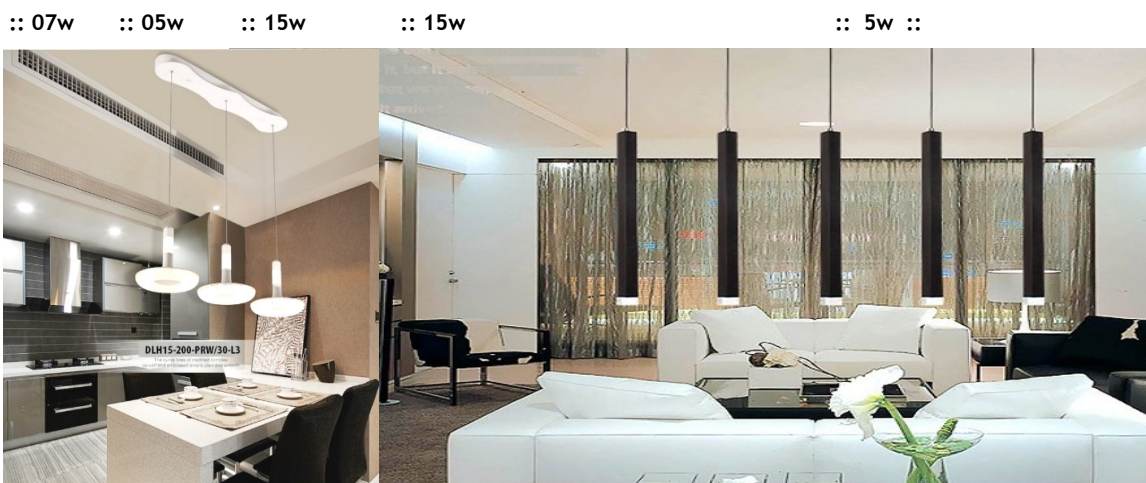

APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

LED HANGING LIGHT - circular shape

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Base	Appearance	CCT	Dimensions (mm)
DLHL50-392-PRW-643	30/50w	Round	Saucer (white)	6000/4000/3000 K	L:392 x W:392 x H:1000
DLHL50-392-PRB-643	30/50w	Round	Saucer (Black)	6000/4000/3000 K	L:392 x W:392 x H:1000

SPECIAL FEATURE

Flexibility of CCT changing on mood

CCT can be changed on switching

3 CCT in 1 set : 6000/4000/3000 K

Voltage :: 85V~265V

Lumen :: 80lm/w

PF :: >0.6

CRI :: 80Ra



APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

PENDANT LIGHT FIXTURE WITHOUT LAMP

Item Code	Colour (inside)	Colour (outside)	Base	Dimensions (mm)
DPL250-290-WH/BK	White	Black + Wood	1 x E27	D:250 x H:290 WL:1000
DPL220-500-GD/BK	Golden	Black	1 x E27	D:220 x H:500 WL:1000
DPLP145-340-27W	White	White	1 x E27	D:145 x H:340 WL:1000
DPLP145-340-27B	White	Black	1 x E27	D:145 x H:340 WL:1000
DPD350-300-27WW	White	White	1 x E27	D:350 x H:300 WL:1000
DPD350-300-27WB	White	Black	1 x E27	D:350 x H:300 WL:1000
DPL400-A127/GD/BK	Golden	Black	1 x E27	L:200 x W:400 x H:1000




APPLICATIONS :: restaurants, office, hotels, residence, display centre, etc.

PENDANT LIGHT ACOUSTIC WITHOUT LAMP

an elegant acoustic pendant offering powerful noise absorption capabilities with a large dome structure.

Item Code	Colour (inside)	Colour (outside)	Material	Base	Dimensions (mm)
DPAD180-150/DG	White	Dark Grey + Wood	Acoustic PET	1 x E27	D:180 x H:150
DPAD205-200/DG	White	Dark Grey + Wood	Acoustic PET	1 x E27	D:205 x H:200
DPAP520-340/GY	White	Grey + Wood	Acoustic PET	1 x E27	D:520 x H:340
DPAD520-300/DG	White	Dark Grey	Acoustic PET	1 x E27	D:520 x H:300
DPAD720-300/DG	White	Dark Grey	Acoustic PET	1 x E27	D:720 x H:300

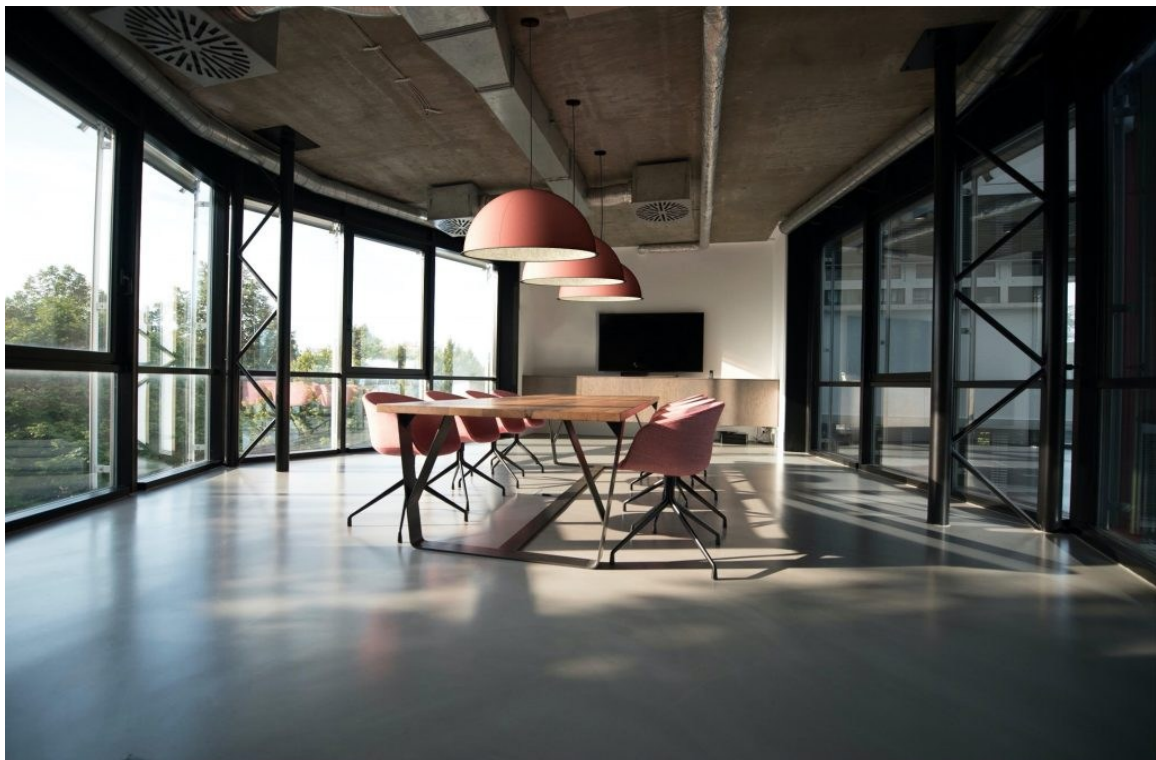

APPLICATIONS ::

restaurants, office, hotels, residence, display centre, etc.

WALL BRACKET/MIRROR LIGHT INDOOR

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	CCT	Frame	Appearance	Dimensions (mm)
DLWB24-400-2SW/40	24w	4000 K	Snake	White	L:400 x W:240 x H:70
DLML10-460-SRW/40	10w	4000 K	Alluminium	White	L:460 x W:70 x H:60
DLML12-570-MW/643	12w	6/4/3000 K	Rectangular	Moving White	L:570 x W:200 x H:120
DLML8-570-FS/643	08w	6/4/3000 K	Rectangular	Fixed Silver	L:570 x W:35 x H:75
DML-580-FG314/SV	<i>no lamp (3xE14)</i>	-	Rectangular	3 Heads Fogged Glass	L:570 x W:35 x H:75



Watt : 2x12w




APPLICATIONS ::

hotels, residence, ressorts, public areas etc.

LED T5 INTEGRATED FIXTURE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Item Code (WARM)	Power (Rated)	Dimensions (mm)
DLF18-1200T5/60	DLF18-1200T5/40	DLF18-1200T5/30	DLF18-1200T5/27	18w	L:1178 x W:20 x H:32
DLF14-900T5/60	DLF14-900T5/40	DLF14-900T5/30	DLF14-900T5/27	14w	L:875 x W:20 x H:32
DLF9-600T5/60	DLF9-600T5/40	DLF9-600T5/30	DLF9-600T5/27	09w	L:570 x W:20 x H:32
DLF5-300T5/60	DLF5-300T5/40	DLF5-300T5/30	DLF5-300T5/27	05w	L:290 x W:20 x H:32

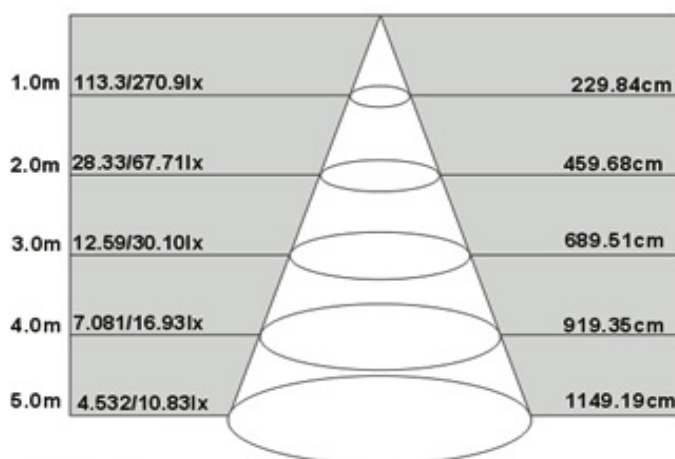

T5 square alluminum white body milky diffuser



APPLICATIONS ::

offices, hotels, banks, display centre, residence, public areas etc.

Operating Voltage 5-265V at 50/60Hz

Lumen Maintenanç± 5% after 8,000hrs

Lumen :: 80lm/w

CRI :: ra>80

Beam Angle :: 120°

PF :: >0.6

Appearance :: Semi Rectangle (WHITE)

Indirect lighting

Connectable



Transparent cap

Available sizes

ensuring safety and comfort...



LED FLEXIBLE STRIP

12 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	LED Chip	Voltage	IP	Dimensions (mm)
DLFS10-S216/60	DLFS10-S216/40	DLFS10-S216/30	2835 : S216	220V	IP65	L:10000 x W:15 x H:07
-	DLSS16-24V-2020/40	-	2835 : S120	24V	IP65	L:5000 x W:20 x H:20
-	DLSS9-220V-1010/40	-	2835 : S120	220V	IP65	L:10000 x W:10 x H:10
-	DLSS9-24V-1010/40	-	2835 : S120	24V	IP65	L:10000 x W:10 x H:10
	DLFS15-20-S2824/40	DLFS15-20-S2824/30	2835 : S280	24V	IP68	L:500 x W:10 x H:06
DLFS9-28-S1212/60	DLFS9-28-S1212/40	DLFS9-28-S1212/30	2835 : S120	12V	IP20	L:500 x W:08 x H:04
-	DLFS9-28-S1224/40	DLFS9-28-S1224/30	2835 : S120	24V	IP20	L:500 x W:08 x H:04
DLFS19-28-S2412/60	DLFS16-28-S2012/40	DLFS19-28-S2412/30	2835 : S240	12V	IP20	L:500 x W:10 x H:04
-	-	DLFS14-50-S6012/RGB	5050 : S60	12V	IP20	L:500 x W:10 x H:04

:: Triple Line 220V



Single Frosted 220V



:: Single Frosted 24V




:: Silicone Strip 24V/220V



Size: 20*20mm

Size: 10*10mm

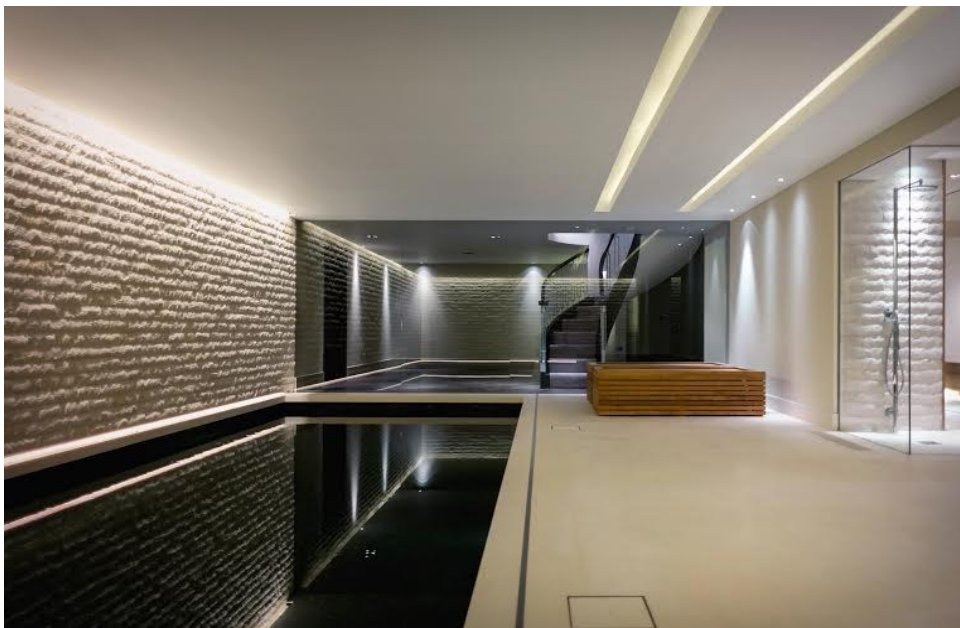

:: Strip 12V 9w



:: Strip 12V RGB



:: Strip 12V 16w



APPLICATIONS::

commercial buildings, hotels, residence, restaurants, public areas etc.


ensuring safety and comfort...



LED LINEAR LIGHT CONCEAL

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Material	Appearance	Cut-out (mm)	Dimensions (mm)
DLL30-1198-CRW/40	30w	Alumn+Acrylic	Rectangular ::White	Ø1190x55	L:1198 x W:63 x H:33
DLL30-1198-CRW/30	30w	Alumn+Acrylic	Rectangular ::White	Ø1190x55	L:1198 x W:63 x H:33
DLL30-1198-CRB/40	30w	Alumn+Acrylic	Rectangular ::Black	Ø1190x55	L:1198 x W:63 x H:33
DLL30-1198-CRB/30	30w	Alumn+Acrylic	Rectangular ::Black	Ø1190x55	L:1198 x W:63 x H:33

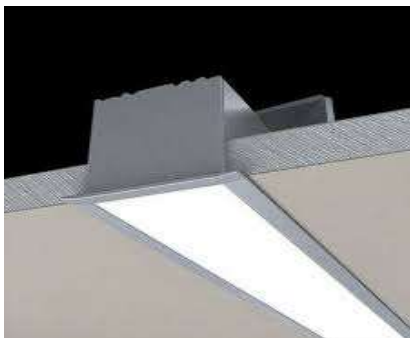

:: continuous line
:: elegant look
:: customized shape
:: upgraded design

Voltage ::: 160V-260V
CCT (K) ::: 4000/3000K
Lumen ::: 100lm/w
Appearance ::: White / Black





APPLICATIONS::

offices, banks, hotels, display centre, public areas etc.

LED SPOT LIGHT CONCEAL INDOOR

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLWW10-147-CRW-30	10w	3000 K	Fixed Opal :: Rectangular WH	138*36	L:147 x W:45 x H:50
	DLLS10-148FR-CW/40	10w	4000 K	Fixed Lensed :: Rectangular WH	138*36	L:148 x W:45 x H:50
	DLLS10-148FR-CB/40	10w	4000 K	Fixed Lensed :: Rectangular BK	138*36	L:148 x W:45 x H:50
	DLLS20-280FR-CB/40	20w	4000 K	Fixed Lensed :: Rectangular BK	270*36	L:280 x W:45 x H:50
	DLS7-63-MR-CRW/30	07w	3000 K	Moving Reflector :: Round WH	Ø55	D:63 x H:70
	DLS7-63-MR-CRB/30	07w	3000 K	Moving Reflector :: Round BK	Ø55	D:63 x H:70
	DLS7-80-MR-CRW/40	07w	4000 K	Moving Reflector :: Round WH	Ø70	D:80 x H:80
	DLS7-80-MR-CRW/30		3000 K			
	DLS5-63FR-CRW/40	05w	4000 K	Fixed Reflector :: Round WH	Ø58	D:63 x H:65
	DLS7-63FR-CRW/40		4000 K	Fixed Reflector :: Round WH		
	DLS7-63FR-CRW/30	07w	3000 K	Fixed Reflector :: Round WH	Ø58	D:63 x H:65
	DLS7-63FR-CRB/40		4000 K	Fixed Reflector :: Round BK		
	DLS12-84FR-CRW/40		4000 K	Fixed Reflector :: Round WH		
	DLS12-84FR-CRW/30	12w	3000 K	Fixed Reflector :: Round WH	Ø75	D:84 x H:78
	DLS12-84FR-CRB/40		4000 K	Fixed Reflector :: Round BK		
	DLS7-92-BL-CSW/40	07w	4000 K	Moving Lensed :: Square WH	Ø75	D:92 x H:50
	DLS7-92-BL-CSW/30		3000 K			
	DLSC5-92-CSWB/30	05w	3000 K	Moving Reflector :: Square WH+BK	Ø75	D:92 x H:55
	DLS10-90MR-SW/40	10w	4000 K	Moving Reflector :: Square WH	Ø75	D:90 x H:85
	DLS7-85-GR-CRW/60	07w	6000 K	Moving Lensed :: Round WH	Ø75	D:85 x H:65
	DLS7-85-GR-CRW/30		3000 K			
	DLS7-85-GR-CRB/40	07w	4000 K	Moving Lensed :: Round BK	Ø75	D:85 x H:65
	DLS7-85-GR-CRB/30		3000 K			
	DLS7-92-BL-CRW/60		6400 K			
	DLS7-92-BL-CRW/40	07w	4000 K	Moving Lensed :: Round White	Ø80	D:92 x H:35
	DLS7-92-BL-CRW/30		3000 K			
	DLS12-110-BL-CRW/40	12w	4000 K	Moving Lensed :: Round White	Ø90	D:110x H:40
	DLS12-110-BL-CRW/30		3000 K			
	DLS12-85-BL-CRW/40	12w	4000 K	Moving Lensed :: Round White	Ø80	D:85x H:35
	DLS12-85-BL-CRW/30		3000 K			

LED SPOT LIGHT CONCEAL INDOOR

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLS12-100FL-CRW/40	12w	4000 K	Fixed Lensed ::	Ø75	D:100 x H:45
	DLS12-100FL-CRW/30		3000 K	Round White		
	DLS7-65GR-CRW/40	07w	4000 K	Moving Lensed ::	Ø75	D:65 x H:64
				Round WH+WH		
	DLS12-87GR-CRW/40	12w	4000 K	Moving Lensed ::		D:87 x H:78
				Round WH+BK	Ø75	D:139 x H:123
	DLS30-139GR-CRW/40	30w	4000 K	Moving Lensed ::		
				Round WH+BK		
	DLS10-82ML-RWW/40	10w	4000 K	Moving Lensed ::		
				Round WH+WH	Ø75	D:82 x H:55
	DLS10-82ML-RWB/40	10w	4000 K	Moving Lensed ::		
				Round WH+BK		
	DLS15-105ML-RWB/40	15w	4000 K	Moving Lensed ::	Ø100	D:105 x H:55
				Round WH+BK		
	DLS12-85-MR-CRB/30	12w	3000 K	Moving Reflector ::	Ø75	D:85 x H:70
				Round Black		
	DLS12-86FL-RWB/40	12w	4000 K	Fixed Lensed ::	Ø80	D:86x H:65
	DLS12-86FL-RWB/30	12w	3000 K	Round WH		
	DLS18-95FL-RWB/40	18w	4000 K	Fixed Lensed ::	Ø90	D:95x H:65
	DLS18-95FL-RWB/30	18w	3000 K	Round WH		
	DLS14-173-MR-CB/40	14w	4000 K	Moving Lensed ::	Ø150*75	L:173 x W:92 x H:50
				Rectangular WH		
	DLS14-173-MR-CW/40	14w	4000 K	Moving Lensed ::	Ø150*75	L:173 x W:92 x H:50
				Rectangular WH		
	DLS24-212-MR-CW/40	2x12w	4000 K	Moving Reflector ::	200*100	L:212 x W:112 x H:110
				Rectangular WH		
	DLS24-212-MR-CW/30	2x12w	3000 K	Moving Reflector ::	200*100	L:212 x W:112 x H:110
				Rectangular WH		
	DLS36-282-MR-CW/40	3x12w	4000 K	Moving Reflector ::	265*100	L:282 x W:112 x H:110
				Rectangular WH		
	DLS30-230-MS-RW/40	3x12w	4000 K	Moving Stretch ::	225*80	L:230 x W:85 x H:116
				Rectangular WH		

Voltage :: 85V-265 Lumen :: 100lm/w

CRI :: ra>80

Lifetime :: 30000hrs

ensuring safety and comfort...



SPOT LIGHT CASIGN CONCEAL

Item Code	Shell Material	Base	Colour	Cut-out (mm)	Dimensions (mm)
DSC-120-CSA-16SB	Alluminum	1 x GU5.3	Silver Brushed	Ø75	L:120 x W:120 x H:20
DSC-110-CSA-16WH	Alluminum	1 x GU5.3	White	Ø75	L:110 x W:110 x H:20
DSC-80-CSA-16SN	Zinc Alloy	1 x GU5.3	Satin Nickel	Ø75	L:80 x W:80 x H:20


SPOT LIGHT CASIGN-SINGLE (without lamp)



DSC-120-CSA-16SB



DSC-110-CSA-16WH



DSC-80-CSA-16SN



APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

LED SPOT LIGHT-mini CONCEAL INDOOR

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLS1-25FL-CRW/40	01w	4000 K	Fixed Lensed :: Round White	Ø22	D:25 x H:26
	DLS1-25FL-CRW/30		3000 K			
	DLS1-31FR-CRW/30	01w	3000 K	Fixed Reflector :: Round White		D:31 x H:25
	DLS1-33FA-CRW/40	01w	4000 K	Fixed Acrylic :: Round White	Ø25	D:33 x H:25
	DLS1-35FL-CRW/40	01w	4000 K	Fixed Lensed :: Round White	Ø25	D:35 x H:25
	DLS1-35FL-CRW/30		3000 K			
	DLS3-38FR-CRS/30	03w	3000 K	Fixed Reflector :: Round Satin	Ø30	D:38 x H:25
	DLS3-40FR-CRA/30	03w	3000 K	Fixed Reflector :: Antique Brass	Ø30	D:40 x H:25
	DLS3-40FR-CRW/65	03w	6500 K	Fixed Reflector :: Round White	Ø30	D:40 x H:25
	DLS3-40FR-CRW/30		3000 K			
	DLS3-42FL-CRW/30	03w	3000 K	Fixed Lensed :: Round White	Ø30	D:42 x H:38
	DLS3-42FL-CRB/30	03w	3000 K	Fixed Lensed :: Round Black	Ø30	D:42 x H:39
	DLS3-48FR-CRW/40	03w	4000 K	Fixed Reflector :: Round White	Ø35	D:48 x H:25
	DLS3-48FR-CRW/30		3000 K		Ø35	D:48 x H:25
	DLS3-48-MC-CW/40	03w	4000 K	Moving Cylinder ::	Ø40	D:48 x H:55
	DLS3-48-MC-CW/30		3000 K	Moving Cylinder ::	Ø40	D:48 x H:55
	DLS3-51BL-CRW/40	03w	4000 K	Moving Lens :: Round White	Ø45	D:51 x H:28
	DLS3-51BL-CRW/30		3000 K			
	DLS3-51BL-CSW/40	03w	4000 K	Moving Lens :: Square White	Ø45	D:51 x H:28
	DLS3-51BL-CSW/40		3000 K			

LED SPOT LIGHT-mini CONCEAL INDOOR

Picture	Item Code	Power	CCT	Apperance	Cut-out (mm)	Dimensions (mm)
	DLS3-51MR-CRW/40	03w	4000 K	Moving Reflector :: Round White	Ø45	D:51 x H:48
	DLS3-51MR-CRW/30		3000 K			
	DLS3-52MR-CRW/60	03w	6000 K	Moving Reflector :: Round White	Ø45	D:52 x H:25
	DLS3-52MR-CRW/40		4000 K			
	DLS3-52MR-CRW/30		3000 K			
	DLS3-60-MR-CSW/65	03w	6500 K	Moving Reflector :: Square White	Ø45	D:60 x H:25
	DLS3-60-MR-CSW/30		3000 K			
	DLS3-52MR-CRA/30	03w	3000 K	Moving Reflector :: Antique Brass	Ø45	D:52 x H:25
	DLS3-70MR-CRA/30	03w	3000 K	Moving Reflector :: Antique Brass	Ø50	D:68 x H:60



Voltage :: 100V~265V

Lumen :: 100lm/w

APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

LED TRACK SPOT LIGHT SURFACE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
-	DLTS10-40-SRW/40	DLTS10-40-SRW/30	10w	White	L:140 x W:40 x H:180
-	DLTS10-40-SRB/40	DLTS10-40-SRB/30	10w	Black	L:140 x W:40 x H:180
-	DLTS10-5024W/40	DLTS10-5024W/30	10w	White	L:128 x W:50 x H:190
-	DLTS12-115-SRW/40	-	12w	White	L:115 x W:25 x H:138
-	DLTS12-115-SRB/40	-	12w	Black	L:115 x W:25 x H:138
DLTS20-66-SRW/65	DLTS20-66-SRW/40	DLTS20-66-SRW/30	20w	White	L:156 x W:66 x H:206
DLTS20-66-SRB/65	DLTS20-66-SRB/40	DLTS20-66-SRB/30	20w	Black	L:156 x W:66 x H:206
DLTS30-7624W/60	DLTS30-7624W/40	-	30w	White	L:182 x W:76 x H:242
-	DLTS30-7624B/40	-	30w	Black	L:182 x W:76 x H:242
-	DLTS30-90-SRB/40	DLTS30-90-SRB/30	30w	Black	L:180 x W:90 x H:270
-	DLTL-20-380-SB/40	-	10x2w	Black	L:380 x W:33 x H:47
-	DLTL-20-380-SB/40	-	10x2w	Black	L:380 x W:33 x H:47



:: 10w ::



:: 12w ::



:: 20w ::



:: 30w ::




:: 30w ::

Voltage :: 185V-265V
CCT (K) :: 6000/4000/3000K
Lumen :: 100lm/w



:: 2x10w ::





:: 2x10w ::



APPLICATIONS:: display centres, expositions, restaurants, focal points etc.

TRACK BAR SUSPENDED / SURFACE

Picture	Item Code	Application	Appearance	Dimensions (mm)
	DLTB-2990-C2-WH	Track bar suspended	WH	L: 2990 x W:58 x H:35
	DLTB-2990-C2-BK	Track bar suspended	BK	L: 2990 x W:58 x H:35
	DLTB-C2PH-58W	Track power head	WH	L: 111 x W:59 x H:56
	DLTB-C2PH-58B	Track power head	BK	L: 111 x W:59 x H:56
	DLTBC-IC2-58W	Track universal direct connector	WH	L: 77 x W:21 x H:12
	DLTBC-IC2-58B	Track universal direct connector	BK	L: 77 x W:21 x H:12
	DLTB-ICS-58W	Track direct connector shell	WH	L: 180 x W:61 x H:37
	DLTB-ICS-58B	Track direct connector shell	BK	L: 180 x W:61 x H:37
	DLTB-FC2-58W	Track flexible connector 2 head	WH	L: 230 x W:32 x H:16
	DLTB-FC2-58B	Track flexible connector 2 head	BK	L: 230 x W:32 x H:16
	DLTB-LCS-58W	Track bend connector shell	WH	L: 121 x W:121 x H:37
	DLTB-LCS-58B	Track bend connector shell	BK	L: 121 x W:121 x H:37
	DLTB-C2S-58W	Track sling	WH	L: 61 x W:40 x H:41
	DLTB-C2S-58B	Track sling	BK	L: 61 x W:40 x H:41
	DLTB-50-100SR-W	Stretchable rod 50-100cm	WH	D: 19 x H:500-1000
	DLTB-50-100SR-B	Stretchable rod 50-100cm	BK	D: 19 x H:500-1000
	DLTB-100-200SR-W	Stretchable rod 100-200cm	WH	D: 19 x H:1000-2000
	DLTB-100-200SR-B	Stretchable rod 100-200cm	BK	D: 19 x H:1000-2000
	DLTB-980-C2-WH	Track bar surface	WH	L:980 x W:40 x H:17
	DLTB-980-C2-BK	Track bar surface	BK	L:980 x W:40 x H:17
	DLTB-1480-C2-WH	Track bar surface	WH	L:1480 x W:40 x H:17
	DLTB-1480-C2-BK	Track bar surface	BK	L:1480 x W:40 x H:17
	DLTB-1980-C2-WH	Track bar surface	WH	L:1980 x W:40 x H:17
	DLTB-1980-C2-BK	Track bar surface	BK	L:1980 x W:40 x H:17

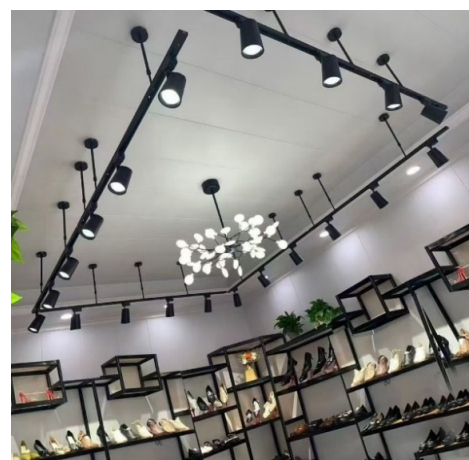

APPLICATIONS:: display centres, expositions, restaurants, focal points etc.

MAGNETIC TRACK LIGHT & TRACK BAR

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	Appearance	CCT	Dimensions (mm)
	DLM10-307FF-LB/40	10w	FIXED FROSTED : BK	4000 K	L:307 x W:22 x H:25
	DLM20-607FF-LB/40	20w	FIXED FROSTED : BK	4000 K	L:607 x W:22 x H:25
	DLM6-115FL-LB/40	6w	FIXED LENSED : BK	4000 K	L:115 x W:22 x H:25
	DLM12-223FL-LB/40	12w	FIXED LENSED : BK	4000 K	L:223 x W:22 x H:25
	DLM18-331FL-LB/40	18w	FIXED LENSED : BK	4000 K	L:331 x W:22 x H:25
	DLM12-223ML-LB/40	12w	MOVING LENSED : BK	4000 K	L:223 x W:22 x H:25
	DLM12-223ML-LB/40	12w	MOVING LENSED : BK	4000 K	L:223 x W:22 x H:25
	DLM7-42ML-TB/40	7w	MOVING LENSED : BK	4000 K	D:42 x H:100
	DLM10-45ML-TB/40	10w	MOVING LENSED : BK	4000 K	D:45 x H:100
	DLM20-55ML-TB/40	20w	MOVING LENSED : BK	4000 K	D:55 x H:100
	DLM6-150PP-GW/40	6w	PENDANT GLOBE : BK	4000 K	D:150
	DLM12-40PA-PB/40	12w	PENDANT PIPE : BK	4000 K	D:40 x H:300
	DLM8-500PR-SW/40	8w	PENDANT ROPE : BK	4000 K	D:22 x L:500
	DLM100-220PS-48/B	100w	POWER SUPPLY : BK	4000 K	L:220 x W:22 x H:38
	DLM200-280PS-48/B	200w	POWER SUPPLY : BK	4000 K	L:280 x W:22 x H:38
	DLMB-1995-20HB	n/a	HIDDEN BAR	n/a	L:2000 x W:53 x H:44.8
	DLMB-1995-20SB	n/a	SURFACE /SUSPENDE	n/a	L:2000 x W:26.2 x H:50
	DLMB-1995-20CB	n/a	CONCEAL BAR	n/a	L:2000 x W:40 x H:50
	DLMB-LC4-20HB	n/a	HIDDEN BAR	n/a	L:000 x W:53 x H:44.8
	DLMB-LC4-20SB	n/a	SURFACE /SUSPENDE	n/a	L:110 x W:26.2 x H:50
	DLMB-LC4-20CB	n/a	CONCEAL BAR	n/a	L:115 x W:40 x H:50
	DLMB-IC2-20B	n/a	I CONNECTOR	n/a	L:160 x W:16 x H:17
	DLMB-FC2-20B	n/a	LONG CONNECTOR	n/a	L:290 x W:16 x H:17

APPLICATIONS::

offices, banks, hotels, display centre, public areas etc.

LED PANEL LIGHT RECESSED

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Frame	Cut-out (mm)	Dimensions (mm)
-	DLP3-90-CRW/30	03w	Round	Ø75	L:85 x W:85 x H:20
-	DLP3-90-CSW/30	03w	Square	Ø75	L:85 x W:85 x H:20
DLP6-87-CRW/40	-	06w	Round	Ø87	L:87 x W:87 x H:20
-	DLP6-120-CRW/30	06w	Round	Ø105	L:120 x W:120 x H:20
DLP6-120-CSW/65	DLP6-120-CSW/30	06w	Square	Ø105	L:120 x W:120 x H:20
DLP12-170-CRW/65	DLP12-170-CRW/30	12w	Round	Ø155	L:170 x W:170 x H:20
DLP12-170-CSW/65	DLP12-170-CSW/30	12w	Square	Ø155	L:170 x W:170 x H:20
DLP10-117-RRW/60	DLP12-120-RRW/40	10w	Round	Ø110	L:120 x W:120 x H:30
DLP10-117-RSW/60	DLP10-117-RSW/30	10w	Square	Ø110	L:117 x W:117 x H:20
DLP16-168-RRW/60	DLP16-168-RRW/30	16w	Round	Ø155	L:168 x W:168 x H:20
DLP16-168-RSW/60	DLP16-168-RSW/30	16w	Square	Ø155	L:168 x W:168 x H:20
DLP18-168-RRW/40	-	18w	Round	Ø155	L:168 x W:168 x H:20
DLP18-168-RSW/40	-	18w	Square	Ø155	L:168 x W:168 x H:20
DLP30-295-CSW/40	-	30w	Rectangular	Ø290x590	L:595 x W:295 x H:30
DLP48-1195-CRW/40	-	48w	Rectangular	Ø1190x290	L:1195 x W:295 x H:30
DLP48-595-CSW/65	DLP48-595-CSW/30	48w	Square	Ø590x590	L:595 x W:595 x H:30
DLP90-1195-CSW/40	-	90w	Rectangular	Ø1195x590	L:1195 x W:595 x H:30

**DLP48-595-CSW/65**

3w/6w/12w



12w



10w/12w/16w/18w



48w



Input Voltage 85-265V at 50/60Hz
 Output Voltage 13V-25V :: 24V-43V
 Lumen Maintenance ± 5% after 8,000hrs

CCT (K) :: 6500K
 CRI :: ra>80
 Beam Angle :: 120°

4000K 3000K
 Lumen :: 80lm/w
 PF :: >0.6 & >0.9

ensuring safety and comfort...



LED SMART DOWN LIGHT CONCEAL

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Cut-out (mm)	Dimensions (mm)
DLSD5-102-CRW/65	-	DLSD5-102-CRW/30	05w	Ø75	L:102 x W:102 x H:50
-	N03E0-1032	-	8w	Ø100	L:113 x W:113 x H:72
DLSD9-120-CRW/65	DLSD9-120-CRW/40	DLSD9-120-CRW/30	9w	Ø100	L:120 x W:120 x H:50
-	-	DLSD9-120-CRB/30	9w	Ø100	L:120 x W:120 x H:50
DLSD12-138-CRW/65	-	DLSD12-138-CRW/30	12w	Ø115	L:138 x W:138 x H:60
-	N03E0-1037	-	12w	Ø130	L:145 x W:145 x H:75
DLSD18-188-CRW/65	-	DLSD18-188-CRW/30	18w	Ø150	L:188 x W:188 x H:70



Voltage	:::	100V-265V
Beam Angle	:::	60°
CCT (K)	:::	6500K/4000K/3000K
CRI	:::	ra>80
Lumen	:::	100lm/w
PF	:::	>0.6
Appearance	:::	White/Black



:: high lumen

:: elegant look

:: focused light

:: upgraded design



APPLICATIONS::


offices, banks, hotels, display centre, public areas etc.

LED BORDERLESS DOWN LIGHT SURFACE

LED SLIM DOWN LIGHT SURFACE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power	Frame	Dimensions (mm)
-	DLD18-120-SRW/40	-	07w	Round	D:75 x H:30
DLD10-100RD-BW/60	DLD10-100RD-BW/40	DLD10-100RD-BW/30	10w	Round	D:100 x H:30
DLD18-120-SRW/60	DLD18-120-SRW/40	DLD18-120-SSW/30	18w	Round	L:120 x W:120 x H:40
DLD18-120-SSW/60	DLD18-120-SSW/40	DLD18-120-SSW/30	18w	Square	L:120 x W:120 x H:40
-	DLD24-175-SRW/40	DLD24-175-SRW/30	24w	Round	L:175 x W:175 x H:40
-	DLD24-175-SSW/40	-	24w	Square	L:175 x W:175 x H:40
DLD9-120-SRW/65	DLD9-120-SRW/40	DLD9-120-SRW/30	09w	Round	L:120 x W:120 x H:25
DLD9-120-SSW/65	DLD9-120-SSW/40	DLD9-120-SSW/30	09w	Square	L:120 x W:120 x H:25
DLD16-170-SRW/65	DLD16-170-SRW/40	DLD16-170-SRW/30	16w	Round	L:170 x W:170 x H:25
DLD16-170-SSW/65	DLD16-170-SSW/40	DLD16-170-SSW/30	16w	Square	L:170 x W:170 x H:25
DLD30-300-SRW/65	-	-	30w	Round	L:300 x W:300 x H:25
DLD30-300-SSW/65	-	-	30w	Square	L:300 x W:300 x H:25

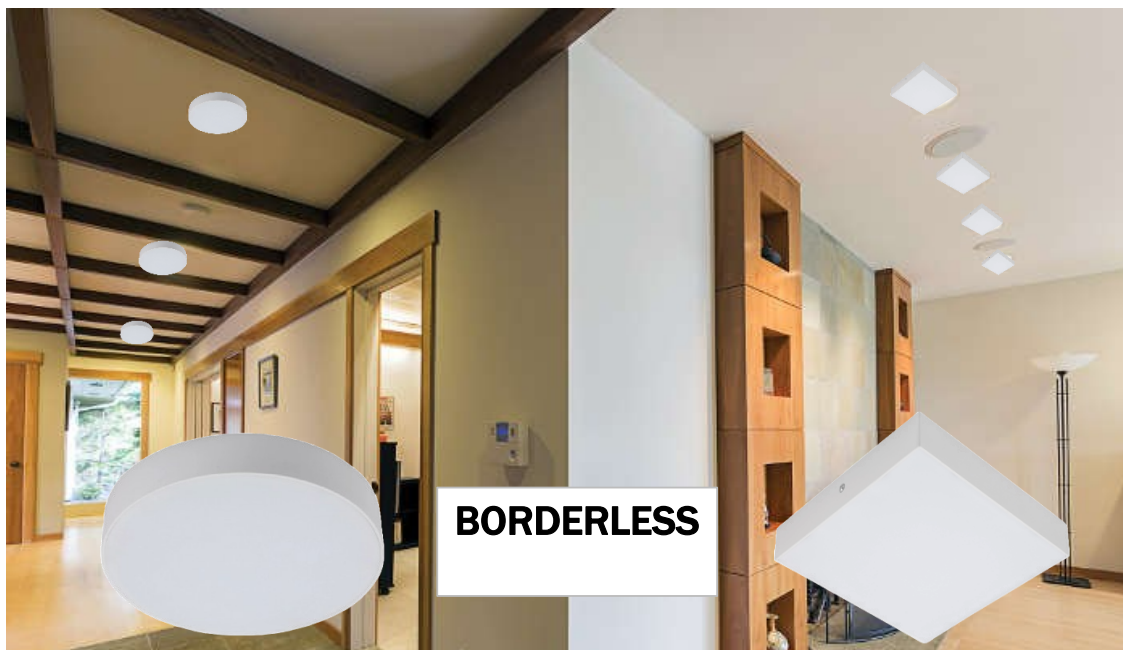

Operating Voltage 90-265V at 50/60Hz

CCT (K) :: 6500K/4000K/3000K

Lumen Maintenance ± 5% after 8,000hrs

CRI :: ra>80 PF :: >0.6

Lumen :: 90lm/w

LED DOWN LIGHT SURFACE

SENSOR LIGHT MIRCOWAVE

24 months warranty against any manufacturing defect.

Item Code	Power	CCT	Appearance	Operation	Dimensions (mm)
DLD6-120-SRW/65	06w	6500 K	Round :: WH	Manual	D:117 x H:35
DLD6-120-SSW/65	06w	6500 K	Round :: WH	Manual	D:117 x H:35
DLD12-165-SRW/40	12w	4000 K	Round :: WH	Manual	D:165 x H:30
DLD12-165-SRB/40	12w	4000 K	Round :: BK	Manual	D:165 x H:30
DLD12-165-SRW/30	12w	3000 K	Round :: WH	Manual	D:165 x H:30
DLD12-165-SSW/40	12w	4000 K	Square :: WH	Manual	L:165 x W:165 x H:30
DLD12-165-SSB/40	12w	4000 K	Square :: BK	Manual	L:165 x W:165 x H:30
DLD12-165-SSW/30	12w	3000 K	Square :: WH	Manual	L:165 x W:165 x H:30
DLD12-170-SRW/65	12w	6500 K	Round :: WH	Manual	D:167 x H:35
DLD12-170-SSW/65	12w	6500 K	Round :: WH	Manual	D:167 x H:35
DLDS12-175-SRW/40	12w	4000 K	Round :: WH	Mircowave	D:175 x H:25
DLDS18-225-SRW/40	18w	4000 K	Round :: WH	Mircowave	D:225 x H:25



<i>Input Voltage</i>	85-265V at 50/60Hz
<i>Output Voltage</i>	13V-25V :: 24V-43V
<i>Maintenance</i>	± 5% after 8,000hrs
<i>Beam Angle</i>	120°
<i>Lumen</i>	80lm/w
PF	0.6



SENSOR LIGHT MIRCOWAVE

APPLICATIONS:: offices, hotels, display centre, residence, public areas etc.

LED CYLINDER LIGHT SURFACE

24 months warranty against any manufacturing defect.

Picture	Item Code (COOL)	Item Code (WARM)	Power	Appearance	Beam	Dimensions (mm)
	DLD5-60SL-SW/40	DLD5-60SL-SW/30	05w	Saucer :: WH	60°	D:60 x H:18
	DLD5-60SL-SB/40	DLD5-60SL-SB/30	05w	Saucer :: BK	60°	D:60 x H:18
	DLD5-58SL-SB/40	DLD5-58SL-SB/30	05w	Saucer :: BK	45°	D:58 x H:16
	DLD7-85SL-SW/40	DLD7-85SL-SW/30	07w	Saucer :: WH	60°	D:85 x H:20
	DLD7-85SL-SB/40	DLD7-85SL-SB/30	07w	Saucer :: BK	60°	D:85 x H:20
 	DLD7-54CL-SW/40	DLD7-54CL-SW/30	07w	Cylinder :: WH	60°	D:53 x H:70
	DLD7-54CL-SB/40	DLD7-54CL-SB/30	07w	Cylinder :: BK	60°	D:53 x H:70
 	DLD12-90FL-CW/40	DLD12-90FL-CW/30	12w	Cylinder :: WH	60°	D:90 x H:50
	DLD12-90FL-CB/40	DLD12-90FL-CB/30	12w	Cylinder :: BK	60°	D:90 x H:50
 	DLD12-85CR-SW/40	-	12w	Cylinder :: WH	60°	D:85 x H:137
	DLD12-85CR-SB/40	DLD12-85CR-SB/30	12w	Cylinder :: BK	60°	D:85 x H:137
	DLD12-78FR-CW/40	DLD12-78FR-CW/30	12w	Cylinder :: WH	45°	D:78 x H:90
	DLD12-78FS-CW/40	DLD12-78FS-CW/30	12w	Cubic :: WH	45°	D:78 x H:90
	DLD12-78FR-CB/40	DLD12-78FR-CB/30	12w	Cylinder :: BK	45°	D:78 x H:90
	DLD12-78FS-CB/40	DLD12-78FS-CB/30	12w	Cubic :: BK	45°	D:78 x H:90
 	DLD10-85FR-CW/40	DLD10-85FR-CW/30	10w	Cylinder :: WH	45°	D:85 x H:80
	DLD10-85FR-CB/40	DLD10-85FR-CB/30	10w	Cylinder :: BK	45°	D:85 x H:80
	DLD10-85FR-CG/40	DLD10-85FR-CG/30	10w	Cylinder :: GR	45°	D:85 x H:80
 	DLD15-100FR-CW/40	DLD15-100FR-CW/30	15w	Cylinder :: WH	45°	D:100 x H:110
	DLD15-100FR-CB/40	DLD15-100FR-CB/30	15w	Cylinder :: BK	45°	D:100 x H:110
	DLD20-130FR-CW/40	DLD20-130FR-CW/30	20w	Cylinder :: BK	45°	D:120 x H:130
	DLD20-130FR-CB/40	DLD20-130FR-CB/30	20w	Cylinder :: BK	45°	D:120 x H:130
	DLD15-130CF-SW/40	DLD15-130CF-SW/30	15w	Cylinder :: WH	90°	D:130 x H:130
	DLD15-130CF-SB/60		15w	Cylinder :: BK	90°	D:130 x H:130
	DLD15-130CF-SB/40	DLD15-130CF-SB/30				

APPLICATIONS :: Office, display centres, exhibitions, restaurants, focal points etc.

LED FOLDING / MOVING DOWN LIGHT SURFACE

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Beam	Dimensions (mm)
	DLD12-50MR-FW/40	12w	4000 K	Moving Reflector :: Square Folding WH	45°	L:50 x W:50 x H:280
	DLD12-50MR-FB/40		4000 K	Moving Reflector :: Square Folding BK		
	DLD10-80MR-FW/40	10w	4000 K	Moving Reflector :: Round Folding WH	45°	D:80 x H:120
	DLD10-80MR-FB/40		4000 K	Moving Reflector :: Round Folding BK		
	DLD12-70ML-FW/40	12w	4000 K	Moving Reflector :: Round Folding WH	36°	D:70 x H:185
	DLD12-70ML-FB/40		4000 K	Moving Reflector :: Round Folding BK		
	DLS24-200-MR-SRB/30	2 x 12w	3000 K	Rectangular :: BK	60°	L:200 x W:100 x H:100

APPLICATIONS :: Office, display centres, expositions, restaurants, focal points etc.

ensuring safety and comfort...

LED EVACUATION LIGHT


12 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Appearance	Battery	CCT	Dimensions (mm)
DLEM6-244-MP/60	06w	2 Heads ABS Matt	3.7V 3600mAh 3h	6000 K	L:244 x W:123 x H:90
DLEM6-244-MP/40	06w	2 Heads ABS Matt	3.7V 3600mAh 3h	4000 K	L:244 x W:123 x H:90
DLES2-370-A2L/60	02w	Al+Acrylic - Left	1.2V 900mAh 3h	6000 K	L:370 x W:200 x H:210
DLES2-370-A2R/60	02w	Al+Acrylic - Right	1.2V 900mAh 3h	6000 K	L:370 x W:200 x H:210
DLES2-370-A2N/60	02w	Al+Acrylic - Neutral	1.2V 900mAh 3h	6000 K	L:370 x W:200 x H:210
DLES2-352-A1N/60	02w	Aluminum - Neutral	1.2V 500mAh 2h	6000 K	L:352 x W:152 x H:80



Voltage :: 85V-265V

Lithium Ni-Cad Battery Inside

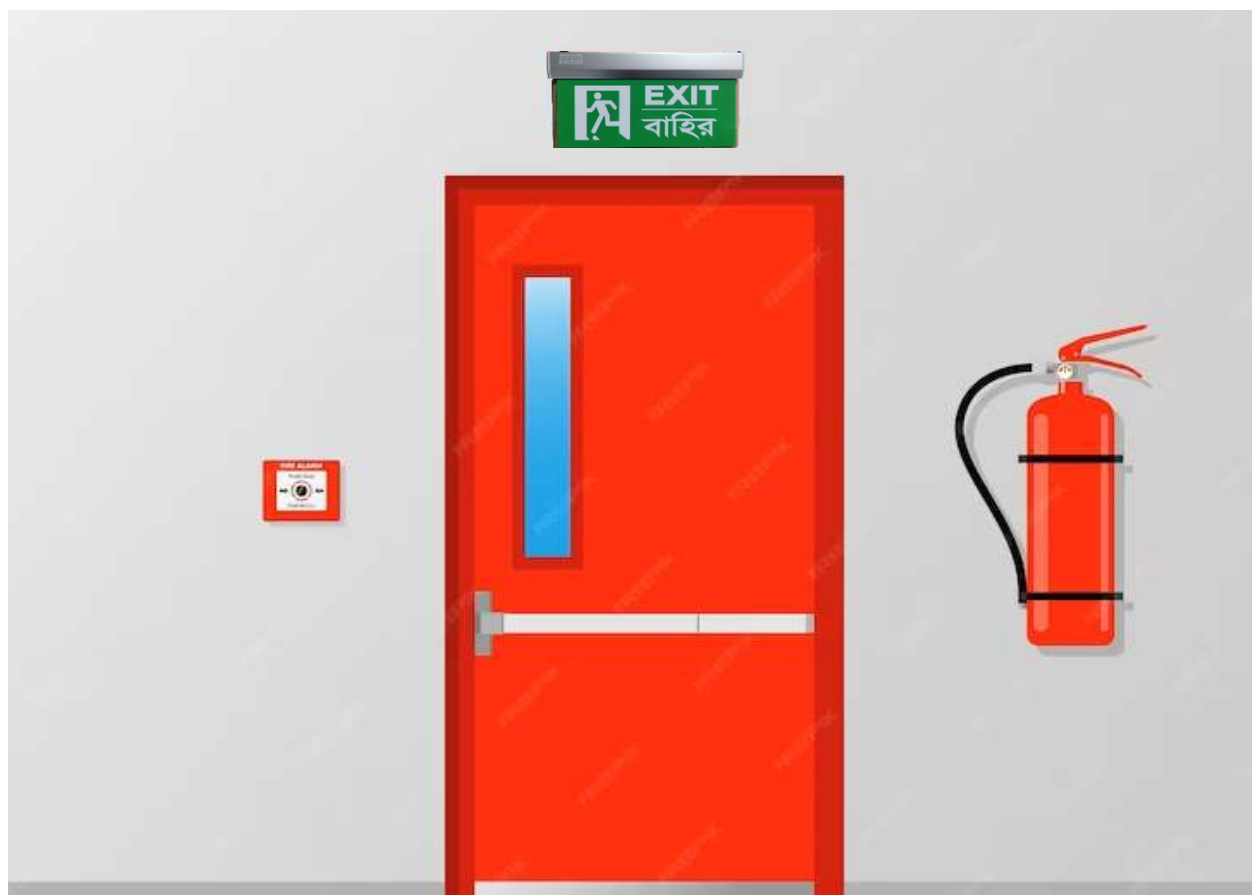

APPLICATIONS:: offices, banks, hotels, display centre, public areas etc.

ensuring safety and comfort...



AVIATION OBSTRUCTION LIGHT

12 months warranty against any manufacturing defect.

Item Code	DLAO15-300-16F/R
Power	≤15W
Flashing frequency	40 Flash/minute
Luminous intensity	≥1600cd
Luminous colour	Red
Light source lifespan	≥50,000 hours
Emitting color	Red
Beam angle	360° horizontal beam angle, ≥10° vertical beam spread
Ingress protection	IP65
Lightning protection	4KA
Light controlled sensitivity	100Lux
Operating temperature	-55°C-55°C
Wind load	80m/sec
Dimensions	L:300 x W:300 x H:150 mm



APPLICATIONS:: offices, banks, hotels, display centre, public areas etc.

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768


LED BOUNDARY LIGHT ::: UPDOWN LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLSR12-2612-1B/30	12w	EPISTAR (Taiwan)	RECTNAG. (Black)	IP65	L:260 x W:125 x H:125
DLSR8-108-SSB/30	08w	EPISTAR (Taiwan)	SQUARE (Black)	IP65	L:108 x W:108 x H:80
DLSR8-108-SSG/30	08w	SANAN (PRC)	SQUARE (Grey)	IP65	L:108 x W:108 x H:80
DLSR12-160R-3B/30	12w	SANAN (PRC)	ROUND (Black)	IP65	D:160 x H:105
DLUD7-1095-1B/30	08w	EPISTAR (Taiwan)	ROUND (Black)	IP65	L:105 x W:95 x H:87
DLUD10-130-SRG/30	1x10w	BRIDGELUX (USA)	CYLINDER (Grey)	IP65	L:130 x W:90 x H:130
DLUD20-170-SRG/30	2x10w	BRIDGELUX (USA)	CYLINDER (Grey)	IP65	L:170 x W:90 x H:130
DLUD4-130-SRB/30	4x01w	CREE (USA)	ROUND (Black)	IP65	L:130 x W:130 x H:55
DLUD10-200-SRG/30	2x05w	BRIDGELUX (USA)	HYPERBOLOID (Grey)	IP65	L:200 x W:100 x H:85
DLUD10-1695-2G/30	2x05w	BRIDGELUX (USA)	RECTNAG. (Grey)	IP65	L:165 x W:95 x H:55
DLUD6-160-2G/30	2x03w	BRIDGELUX (USA)	RECTNAG. (Grey)	IP65	L:160 x W:95 x H:55
DLUD2-80-SOG/30	2x01w	CREE (USA)	OVAL (Black)	IP65	L:80 x W:80 x H:34
DLUD10-1010-2B/30	2x05w	BRIDGELUX (USA)	SQUARE (Black)	IP65	L:100 x W:100 x H:100
DLSC6-100-SSG/30	2x03w	BRIDGELUX (USA)	RECTNAG. (Black)	IP66	L:100 x W:100 x H:50
DLUD3-87-SSG/30	1x05w	CREE (USA)	RECTNAG. (Black)	IP65	L:82 x W:78 x H:65
DLUD6-162-SRG/30	2x03w	CREE (USA)	RECTNAG. (Black)	IP65	L:162 x W:80 x H:65
DLUD3-9545-2B/30	2+1w	CREE (USA)	RECTNAG. (Black)	IP65	L:95 x W:45 x H:58

Voltage ::: 85V-265V

CCT (K) ::: 3000K

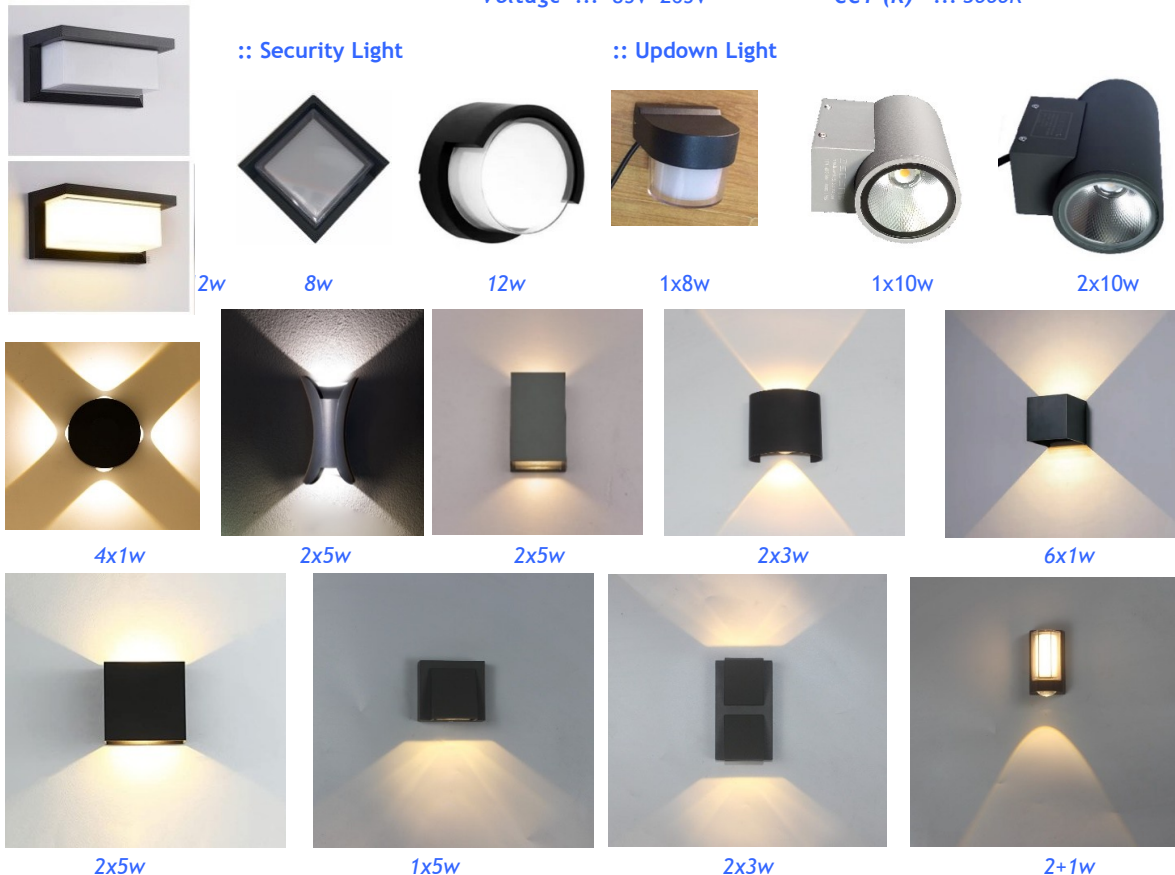

APPLICATIONS ::: Boundry wall, Building Façade or any outdoor location need to be illuminated.

LED BOUNDARY / GATE LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Category	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLWB10-200-PB/30	10w	BRIDGELUX (USA)	Pyramid :: Black	IP65	L:200 x W:200 x H:370
DLSR10-200-SRG/30	10w	BRIDGELUX (USA)	ROUND (Black)	IP65	L:200 x W:130 x H:70
DWB-150-A127/OB	1xE27	BRIDGELUX (USA)	Oval :: Black	IP54	L:150 x W:125 x H:280
DWB-125-P127/SB	1xE27	BRIDGELUX (USA)	Square :: Black	IP54	L:150 x W:170 x H:375



1x10w



1x10w



Voltage	:::	85V-265V
CCT (K)	:::	3000 K
CRI	:::	ra>80
Lumen	:::	60-80lm/w
PF	:::	>0.6
Avg, Lifetime	:::	30,000hrs
Appearance	:::	Black

APPLICATIONS :: Wall, commercial buildings, hotels, residence etc.

LED GARDEN LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	LED Brand	Beam	Appearance	Protection	Dimensions (mm)
DLGL3-75-SRG/30	03w	OSRAM (Germany)	24°	Round :: Grey	IP66	L:140 x W:75 x H:280
DLGL3-25R-24B/30	03w	CREE (USA)	24°	Round :: Black	IP67	L:120 x W:25 x H:210
DLGL5-68-SRG/30	05w	BRIDGELUX (USA)	45°	Round :: Grey	IP66	L:105 x W:68 x H:270
DLGL6-62-SRG/30	06w	PHILIPS (PRC)	38°	Round :: Grey	IP65	L:100 x W:62 x H:122
DLGL6-60-SSG/30	06w	PHILIPS (PRC)	38°	Square :: Grey	IP65	L:70 x W:60 x H:96
DLGL7-50R-24B/30	07w	BRIDGELUX (USA)	24°	Round :: Black	IP65	L:155 x W:50 x H:315
DLGL7-50R-24G/30	07w	BRIDGELUX (USA)	24°	Round :: Grey	IP65	L:155 x W:50 x H:315
DLGL12-62R-45B/30	12w	OSRAM (Germany)	45°	Round :: Black	IP65	L:130 x W:60 x H:250
DLGL12-115-SRG/30	12w	BRIDGELUX (USA)	45°	Round :: Grey	IP66	L:83 x W:115 x H:150



3w



3w



5w



6w



6w



7w



12w



12w

Voltage	:::	85V~265V
CCT (K)	:::	3000 K
CRI	:::	ra>80
Lumen	:::	60-80lm/w
Avg, Lifetime	:::	20,000hrs

APPLICATIONS :: Garden, Lawn, Walkway, Up tree lighting, any outdoor location need to be illuminated.


ensuring safety and comfort...



LED BOLARD LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Category	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLBL10-6016-2G/30	10w	BRIDGELUX (USA)	Rectangular :: Grey	IP65	L:160 x W:45 x H:600
DLBL7-3016-SRG/30	07w	BRIDGELUX (USA)	Rectangular :: Grey	IP65	L:160 x W:45 x H:300
DLBL12-6010-4G/30	12w	BRIDGELUX (USA)	Round :: Grey	IP65	L:108 x W:108 x H:600
DLGP12-3015-SRG/30	12w	BRIDGELUX (USA)	Round :: Grey	IP65	L:150 x W:150 x H:300
DLGP12-3015-SSG/30	12w	BRIDGELUX (USA)	Square :: Grey	IP65	L:150 x W:150 x H:300

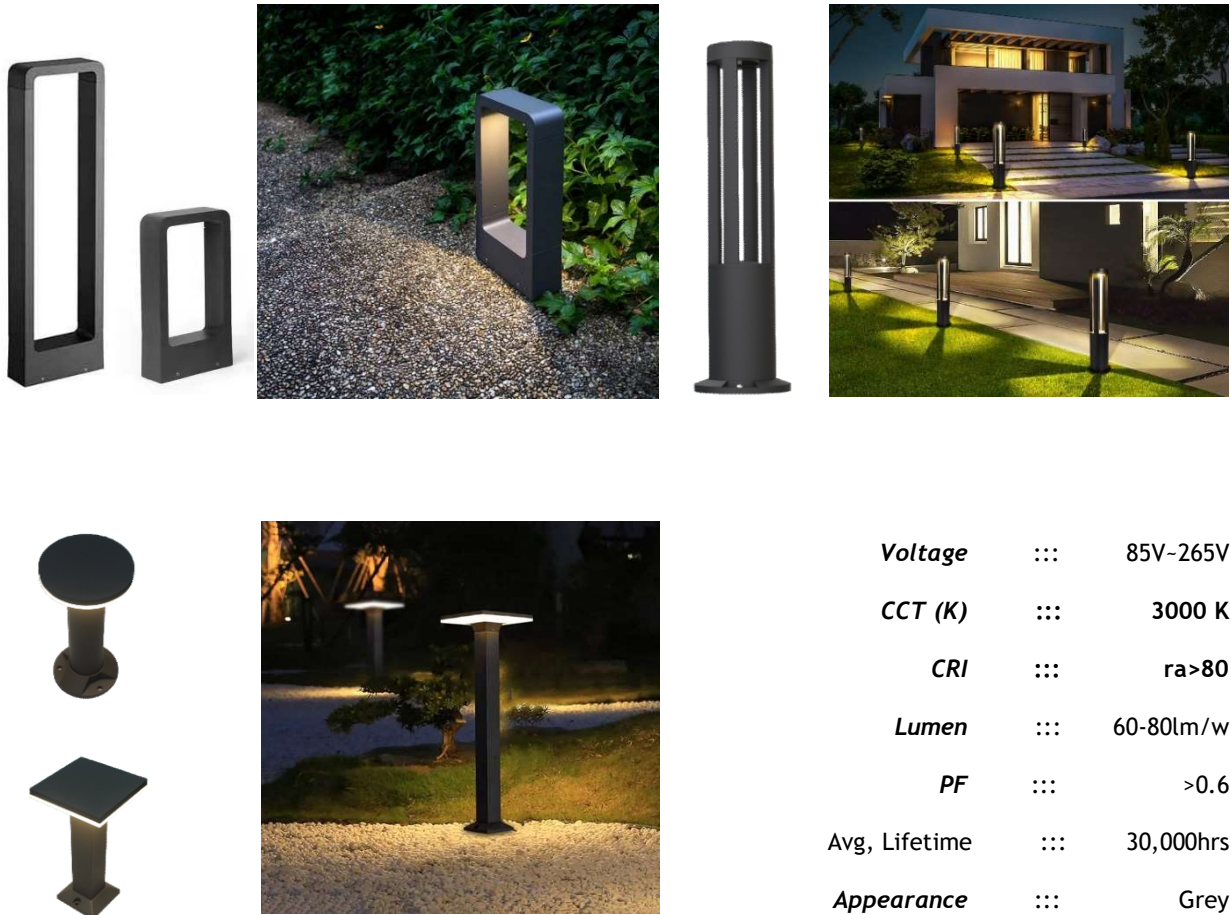

Voltage	:::	85V-265V
CCT (K)	:::	3000 K
CRI	:::	ra>80
Lumen	:::	60-80lm/w
PF	:::	>0.6
Avg, Lifetime	:::	30,000hrs
Appearance	:::	Grey

APPLICATIONS :: Garden, Lawn, Walkway, Tree lighting, any outdoor location need to be illuminated.

STAIRCASE LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLSC3-86-CRG/30	03w	OSRAM (Germany)	Round :: GR	IP65	L:86 x W:86 x H:55
DLSC3-86-CSG/30	03w	CREE (USA)	Square :: GR	IP65	L:86 x W:86 x H:55
DLSC3-185-CRG/30	03w	BRIDGELUX (USA)	Rectangular :: GR	IP65	L:185 x W:40 x H:48
DLSC3-90-CRB/30	03w	BRIDGELUX (USA)	Square :: BK	IP65	L:90 x W:90 x H:55
DLSC3-110-CRG/30	03w	PHILIPS (PRC)	Rectangular :: GR	IP65	L:110 x W:45 x H:54
DLSC3-145-CRG/30	03w	PHILIPS (PRC)	Rectangular :: GR	IP65	L:145 x W:55 x H:50
DLSC3-105-SRB/30	03w	OSRAM (Germany)	Rectangular :: BK	IP65	L:105 x W:105 x H:25

:: Staircase Light




Voltage ::: 85V-265V
Beam Angle ::: 15° - 90°
CCT (K) ::: 3000 K

Lumen ::: 80-90lm/w
PF ::: >0.6
Appearance ::: Grey/Black

LED INGROUND LIGHT OUTDOOR WATER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	Voltage	Beam	Protection	Dimensions (mm)
DLIG1-42-22CRS/30	01w	85V-265V	30°	IP67	D:42 x H:80
DLIG1-42-12CRS/30	01w	12V	30°	IP68	D:42 x H:80
DLIG3-52-22CRS/30	03w	85V-265V	30°	IP67	D:52 x H:80
DLIG3-52-12CRS/30	03w	12V	30°	IP68	D:52 x H:80
DLIG3-52-12FRS/30	03w	12V	30°	IP68	D:52 x H:48
DLIG3-60-12CRS/30	03w	12V	30°	IP68	D:60 x H:50
DLIG3-75-22CRS/30	03w	85V-265V	30°	IP68	D:75 x H:98
DLIG3-100-22CRS/30	03w	85V-265V	30°	IP68	D:100 x H:75
DLIG6-125-22CRS/30	06w	85V-265V	30°	IP68	D:125 x H:90
DLIG6-125-12CRS/30	06w	12V/24V	30°	IP68	D:125 x H:90
DLIG7-100-22CRS/30	07w	85V-265V	60°	IP67	D:100 x H:80
DLIG15-150-22CRS/30	15w	85V-265V	60°	IP67	D:150 x H:92
DLIG3-152-22CRS/30	03w	85V-265V	1D x 30°	IP68	D:52 x H:80
DLIG3-252-22CRS/30	03w	85V-265V	2D x 30°	IP68	D:52 x H:80
DLIG3-452-22CRS/30	03w	85V-265V	2D x 30°	IP68	D:52 x H:80

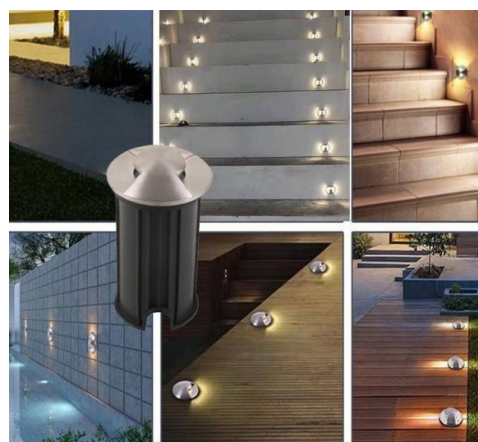

::: Inground Light

::: Inground Light

::: Inground Light

::: Inground Light -Directional



APPLICATIONS :: Swimming Pool, Fountain, any other artificial under water location

LED UNDER WATER LIGHT WATER PROOF

24 months warranty against any manufacturing defect.

Item Code	Power	Voltage	LED Brand	Protection	Dimensions (mm)
DLIG1-42-12-CRS/30	01w	12V/24V	CREE (USA)	IP68	D:42 x H:80
DLIG3-52-12-CRS/30	03w	12V/24V	CREE (USA)	IP68	D:52 x H:80
DLIG3-100-12-CRS/30	03w	12V/24V	BRIDGELUX (USA)	IP68	D:100 x H:75
DLIG6-125-12-CRS/30	06w	12V/24V	BRIDGELUX (USA)	IP68	D:125 x H:85
DLUW3-82-SRS/30	03w	12V	BRIDGELUX (USA)	IP68	D:82 x H:150
DLUW6-120-SRS/30	06w	12V	BRIDGELUX (USA)	IP68	D:120 x H:150
DLUW6-125-SRSN/27	06w	12V	EPISTAR (Taiwan)	IP68	D:125 x H:180
DLUW6-120-SRS/RGB	06w	12V	BRIDGELUX (USA)	IP68	D:120 x H:155
DLUW9-145-SRS/RGB	09w	12V	BRIDGELUX (USA)	IP68	D:145 x H:170
DLUW9-170-12FR-30	09w	12V	BRIDGELUX (USA)	IP68	D:170 x H:80
DLUW8-120-CRS/30	08w	12V	BRIDGELUX (USA)	IP68	D:120 x H:10
DLUW24-230-CRS/30	24w	12V	BRIDGELUX (USA)	IP68	D:230 x H:10
DLUW18-290-SRC/30	18w	12V/24V	EPISTAR (Taiwan)	IP68	D:277 x H:60
DLUW36-290-SRC/30	36w	12V/24V	EPISTAR (Taiwan)	IP68	D:277 x H:60



8w/24w



18w/36w



::: Inground Light

::: Inground Light

::: Under Water Light

::: Under Water Light



1w



3w

Fountain Light



9w



6w



9w



3w




6w

APPLICATIONS :: Swimming Pool, Fountain, any other artificial under water location

LED FLOOD LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	LED Brand	Beam	Dimensions (mm)
DLF10-150-SG/60	DLF10-150-SG/30	10w	EPISTAR (Taiwan)	90°	L:150 x W:113 x H:43
-	DLF20-163-SG/30	20w	EPISTAR (Taiwan)	90°	L:163 x W:139 x H:28
DLF30-170-SG/60	DLF30-170-SG/30	30w	EPISTAR (Taiwan)	90°	L:187 x W:170 x H:40
DLF50-210-SG/60	DLF50-223-SLG/30	50w	EPISTAR (Taiwan)	90°	L:240 x W:210 x H:45
DLF100-295-SG/60	DLF100-276-SLG/30	100w	EPISTAR (Taiwan)	90°	L:295 x W:255 x H:55
DLF200-345-SG/60	DLF200-350-SLG/30	200w	EPISTAR (Taiwan)	90°	L:345 x W:375 x H:58

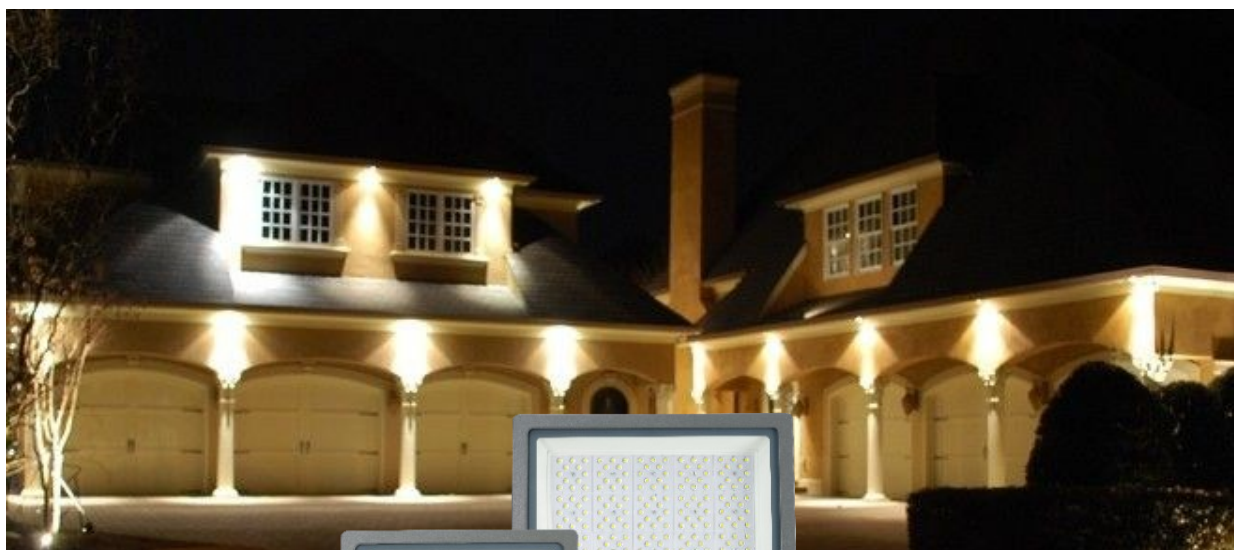

10w



20w



30w



50/100/200w

Voltage	:::	85V-265V
Protection	:::	IP66/IP67
CCT (K)	:::	6000/3000/2700K
LED Chips	:::	EPISTAR (Taiwan)
Lumen	:::	100-110lm/w
CRI	:::	ra>80
PF	:::	>0.90
Frame	:::	Rectangular
Appearance	:::	Black / Grey

LED DOB FLOOD LIGHT OUTDOOR

12 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Beam	Protection	Dimensions (mm)
DLF30-139-DG/60	DLF30-139-DG/30	30w	90°	IP65	L:160 x W:139 x H:25
DLF50-165-DG/60	DLF50-165-DG/30	50w	90°	IP65	L:180 x W:165 x H:25
DLF100-217-DG/60	DLF100-217-DG/30	100w	90°	IP65	L:238 x W:217 x H:25
DLF150-270-DG/60	-	150w	90°	IP65	L:295 x W:270 x H:25
DLF200-305-DG/60	-	200w	90°	IP65	L:335 x W:305 x H:25
DLF400-388-DG/60	-	400w	90°	IP65	L:425 x W:388 x H:31



30w



50w



100w

Voltage	:::	100V-400V
Protection	:::	IP65
CCT (K)	:::	6000 K/3000 K
LED Chips	:::	DOB (China)
Lumen	:::	100-110lm/w
CRI	:::	ra>80
PF	:::	>0.90
Frame	:::	Rectangular
Appearance	:::	Grey



150w



200w




400w

LED FACADE LIGHT ::: AREA LIGHT OUTDOOR - high power

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Brand	Beam Angle	Protection	Dimensions (mm)
DLF18-125-10G/30	18w	BRIDGELUX (USA)	10°	IP66	L:125 x W:125 x H:70
DLF50-154-10G/30	50w	BRIDGELUX (USA)	10°	IP66	L:154 x W:154 x H:100
DLF400-543-10B/30	400w	OSRAM	10°	IP66	L:543 x W:100 x H:000
DLF400-543-30B/30	400w	CREE (USA)	30°	IP66	L:530 x W:300 x H:180
DLF1000-470-SB/60	800/1000w	CREE (USA)	10°/30°/60°	IP66	L:470 x W:543 x H:250

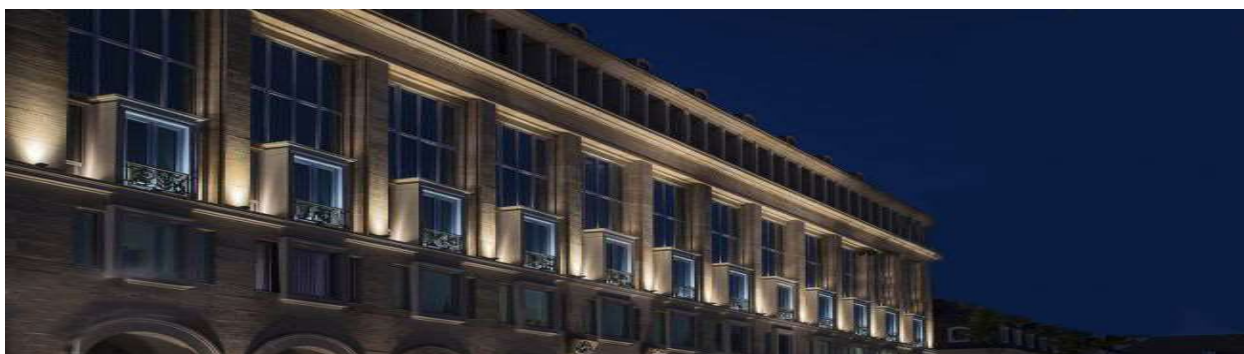

18w



50w



400w



400w



2x400/500w

Voltage	:::	85V-265V
Protection	:::	IP65/IP66
CCT (K)	:::	6000 K
Lumen	:::	110lm/w
CRI	:::	ra>80
PF	:::	>0.95
Frame	:::	Rectangular
Appearance	:::	Black/Grey



APPLICATIONS::

Construction Area, Playing Ground, Mines, Industries, Façade Lighting etc.

LED WALL WASHER (SURFACE & INGROUND)

24 months warranty against any manufacturing defect.

Item Code	Power	Beam Angle	LED Brand	Protection	Dimensions (mm)
DLWW12-4046-SG/30	12w	30°	EPISTAR (Taiwan)	IP65	L:495 x W:40 x H:46
DLWW18-4048-SG/27	18w	30°	EPISTAR (Taiwan)	IP65	L:980 x W:40 x H:48
DLWW24-4048-SG/30	24w	30°	EPISTAR (Taiwan)	IP65	L:980 x W:40 x H:48
DLIG6-300FG-CF/30	06w	60°	EPISTAR (Taiwan)	IP67	L:300 x W:50 x H:65
DLIG9-300-22CS/30	09w	30°	EPISTAR (Taiwan)	IP67	L:300 x W:90 x H:80
DLIG12-500-22-CRS/30	12w	30°	CREE (USA)	IP67	L:500 x W:90 x H:80
DLIG36-1000-22-CRS/30	24w	30°	OSRAM (Germany)	IP67	L:1000 x W:90 x H:75

:: 18w/24w Surface



180V-260V

:: 6w Inground




:: 9w Inground



PF :: >0.6

Lumen :: 90lm/w

:: 12w Inground



:: 24w Inground



APPLICATIONS :: Wall, bridge, park, commercial buildings, hotels, residence etc.
House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.


sales@decentdistributions.com
+88 01711009624, 01711021768

LED STREET LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Chip Type	LED Brand	Beam	Dimensions (mm)
DLST40-330-SG//40	40w	SMD	EPISTAR	140°*70°	L:330 x W:150 x H:65
DLST60-375-SG//40	60w	SMD	EPISTAR	140°*70°	L:375 x W:150 x H:65
DLST100-525-SG//40	100w	SMD	EPISTAR	140°*70°	L:525 x W:180 x H:75
DLST150-650-SG//40	150w	SMD	EPISTAR	140°*70°	L:650 x W:260 x H:95
DLST200-700-SG//40	200w	SMD	EPISTAR	140°*70°	L:700 x W:260 x H:95
DLST100-630-CG//60	100w	COB	EPISTAR	120°	L:630 x W:315 x H:90
DLST150-740-CG//60	150w	COB	EPISTAR	120°	L:740 x W:315 x H:90
DLST100-650-CG//60	100w	COB	EPISTAR	120°	L:650 x W:250 x H:90
DLST150-800-CG//60	150w	COB	EPISTAR	120°	L:800 x W:310 x H:130

Available in a variety of sizes

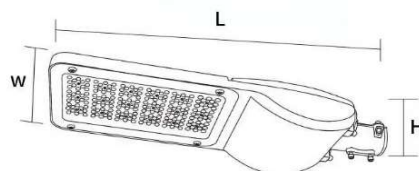

100W COB



150W COB



LED HIGH BAY LIGHT INDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Brand	Beam Angle	Reflector	Dimensions (mm)
DLHB100-375-PB/50	100w	EPISTAR (Taiwan)	30°	Lens	D:375 x H:121
DLHB100-410-SF/60	100w	EPISTAR (Taiwan)	30°	Fish Scale	D:410 x H:446
DLHB100-410-SM/60	100w	EPISTAR (Taiwan)	30°	Matt	D:410 x H:446
DLHB150-502-SF/60	150w	EPISTAR (Taiwan)	30°	Fish Scale	D:502 x H:390
DLHB150-502-SM/60	150w	EPISTAR (Taiwan)	30°	Matt	D:502 x H:390




LED Chip ::: EPISTAR SMD2835
Driver ::: Isolated (Constant)
Voltage ::: 100V~300V



CCT (K) ::: 5000K
CRI ::: ra>90
Lumen ::: 110lm/w
PF ::: >0.95



Temperature ::: - 30°C to +70°C
Protection ::: IP44
Average Life ::: 30,000 hrs.
Certification ::: CE, RoSH, TuV

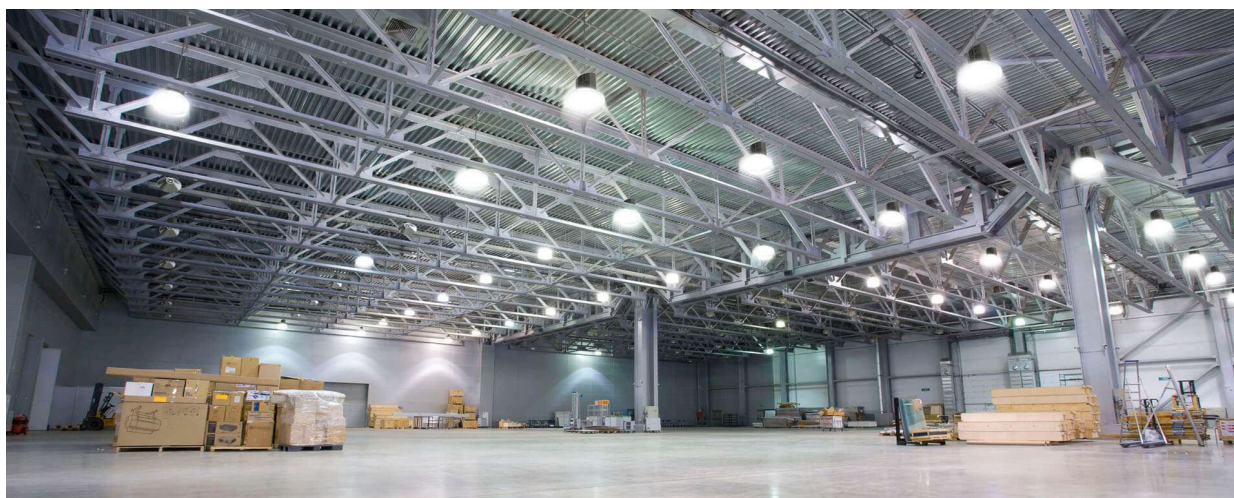

APPLICATIONS::

Suitable for lighting in workshops, warehouses, factories, gas stations, supermarkets etc.