




CORPORATE PROFILE

Company Name : Decent Distributions Ltd.
Corporate Office : H # 102/1, R # 8/A (new), West Dhanmondi, Dhaka-1209, Bangladesh
Joint Stock Incorporation : C-68799/2007
Incorporated on : 24 October, 2007
Registered Trademark : **DECENT®**
Products : Lighting - Electrical - Accessories
After sales services : 24 Hours to solve your 80% claims
Cell : +880 1711 021768, +880 1711 009624
email : sales@decentdistributions.com
Website : www.decentdistributions.com
 : <https://www.facebook.com/decentdistributions>

Vision

Ensuring safety & comfort with an aesthetic touch in your life.

History

Decent Distributions Ltd. (DDL) started its journey in 2007 with aspiration to inaugurate new technologies with a better choice. Product lines are based on contemporary LED lights, suitable to use in your commercial spaces, industries and residences. We have created a family of products and experiences that help lighting professionals imagine and design their own composition of light for modern living and get necessary advice from our team.

Over the last 15 years DECENT® brand has created a loyal customer group who are more of quality and design conscious. These frequent user group has ultimately proven DECENT® product's long lasting and high lumen output features. We are continuously concentrating to make better technologies available at reasonable price all over the country through well-organized marketing channels - Corporate sales, Project sales and Retail/Channel sales.

Why **DECENT®**?

- Most of the products are CE certified to confirm the standard of safety & comfort.
- Maximum products are sold with a certain period of warranty.
- Products are comparatively durable and deliver high lumen output.
- Customers' affordability is considered in product pricing. (Regular products)
- Our professional sales personnel offer the apposite product counseling.
- Inside the Dhaka metropolitan city delivery is free. (Quantity purchase)
- For maintenance prompt after sales services (immediate warranty replacement)

ensuring safety and comfort...




Prominent Customers

DEVELOPERS



INTERIOR COMPANIES



MULTINATIONAL COMPANIES



ensuring safety and comfort...



BANK & FINANCIAL INSTITUTIONS



GROUPS & INDUSTRIES



GOVERNMENT & AUTONOMOUS INSTITUTIONS




ensuring safety and comfort...



LED LINEAR LIGHT - T1

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL40-1140-PRW/60	DLL40-1140-PRW/40	DLL40-1140-PRW/30	40w	White	L:1140 x W:60 x H:80
DLL40-1140-PRB/60	DLL40-1140-PRB/40	DLL40-1140-PRB/30	40w	Black	L:1140 x W:60 x H:80


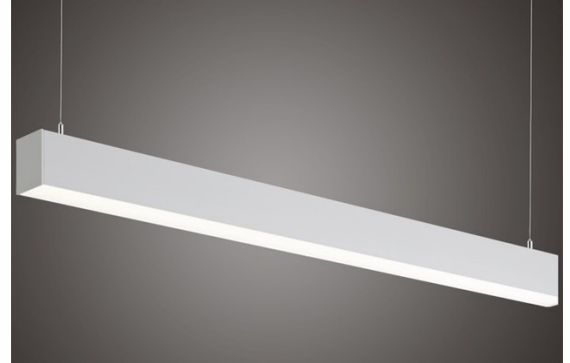


- Eye friendly
- Anti-glare
- Shadowless
- Uniformity
- Linkable
- Elegant Look

APPLICATIONS::

offices, hotels, display centre, public areas etc.

Aluminium body-screwless design-Germany diffuser

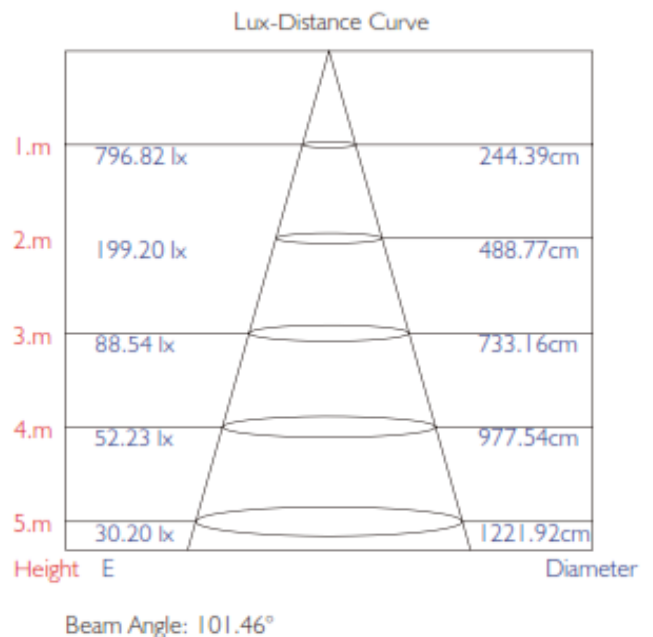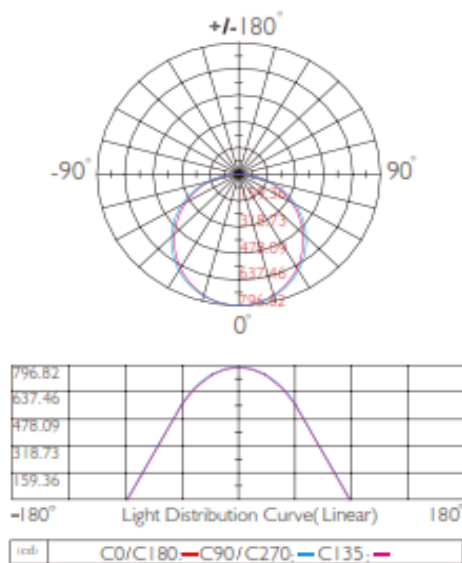

Voltage 180-265V at 50/60Hz
 mA 1000mA
 PF >0.9
 Lifetime 30,000hrs


Beam Angle 100°
 CRI ra>80
 Available CCT 6000K/4000K/3000K
 Lumen 3000lm



ensuring safety and comfort...



LED LINEAR LIGHT - T1

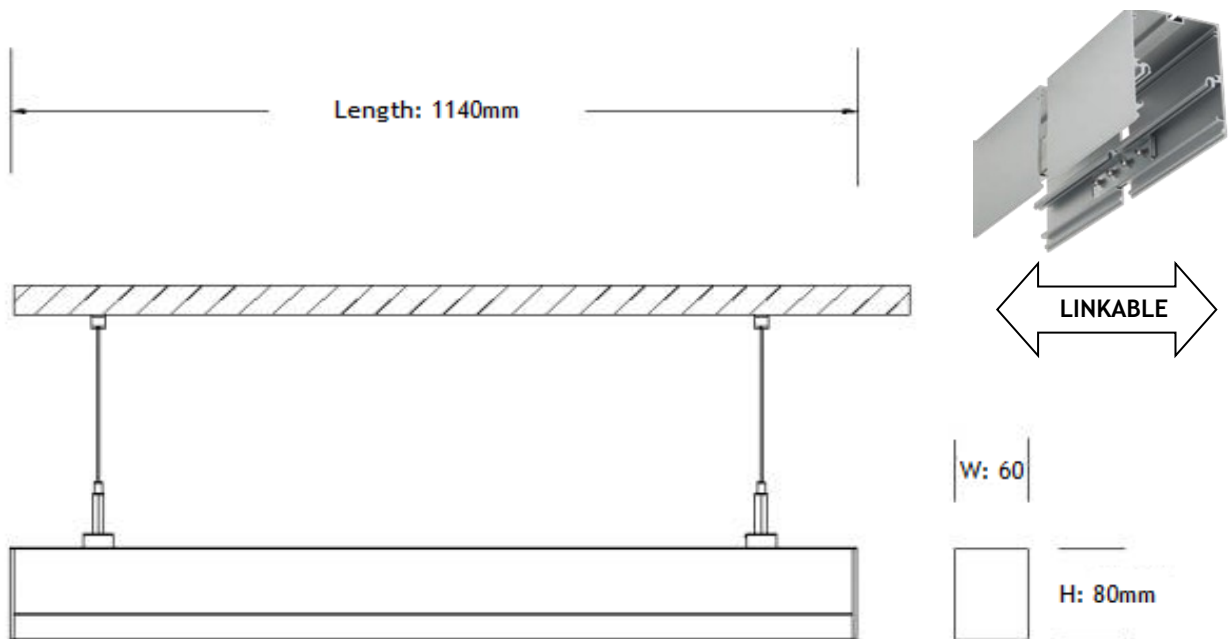

ensuring safety and comfort...



LED LINEAR LIGHT - T2

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
DLL30-1185-PRW/65	DLL30-1185-PRW/40	DLL30-1185-PRW/30	30w	White	L:1185 x W:50 x H:60
DLL30-1185-PRB/65	DLL30-1185-PRB/40	DLL30-1185-PRB/30	30w	Black	L:1185 x W:50 x H:60
-	DLL60-2370-PRW/40	-	60w	White	L:2370 x W:50 x H:60
-	DLL60-2370-PRB/40	-	60w	Black	L:2370 x W:50 x H:60



APPLICATIONS::

offices, hotels, display centre, public areas etc.


Eye friendly

Anti-glare

Shadowsless

Uniformity

Linkable

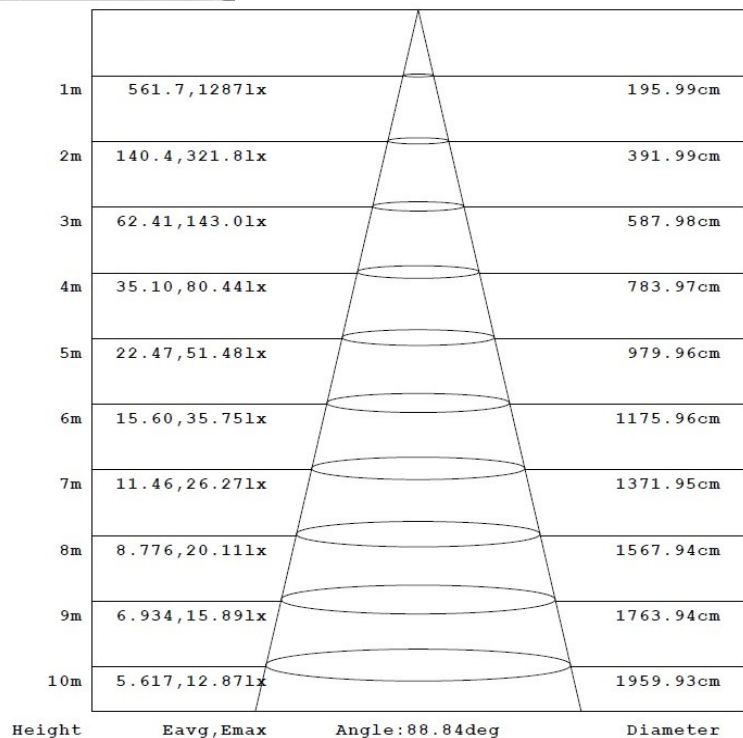

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Voltage	100-265V at 50/60Hz
mA	312mA
PF	>0.5
Lifetime	20,000hrs

Beam Angle	90°
CRI	ra>80
CCT	6500K/4000K/3000K
Lumen	3000lm




ensuring safety and comfort...



LED LINEAR LIGHT / LED CLEAN LIGHT - T3


24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Appearance	Material	Dimensions (mm)
DLL50-1185-PRW/30	50w	White	Alumn+Acrylic	L:1185 x W:100 x H:45
DLC36-1103-SRW/40	36w	White	ABS+Acrylic	L:1107 x W:50 x H:35
DLC18-503-SRW/40	18w	White	ABS+Acrylic	L:503 x W:50 x H:35
DLC40-1200-SOW/65	40w	White	Aluminium+Acrylic	L:1200 x W:73 x H:25
DLC40-1200-SOS/65	40w	Silver	Aluminium+Acrylic	L:1200 x W:73 x H:25
DLC18-600-SOW/65	18w	White	Aluminium+Acrylic	L:600 x W:73 x H:25

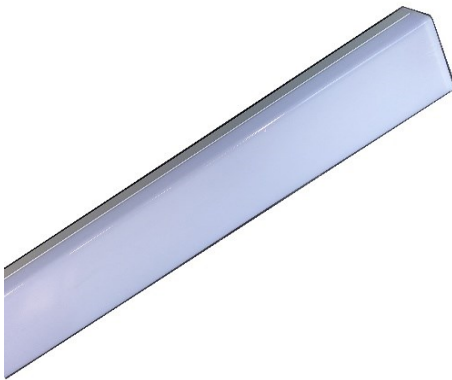

36w & 18w

40w & 18w

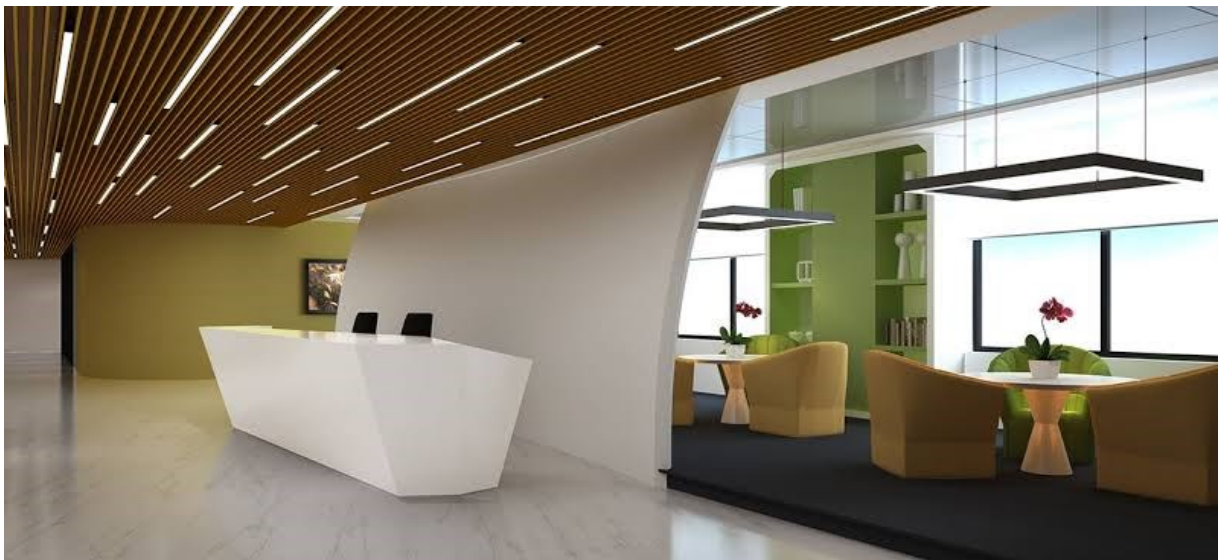

Voltage 100V/160-260V Lumen :: 80lm/w
 CCT (K) :: 6500/4000 K Appearance :: White

:: continuous line :: Installation 3 ways :: 4 dimensional illumination

APPLICATIONS::

offices, banks, hotels, display centre, super market, public areas etc.

House # 102/1, Road # 8/A (New)
 West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
 +88 01711009624, 01711021768

LED HANGING LIGHT - multi shape

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	Base	Appearance	CCT	Dimensions (mm)
DLH7-4032-PRW/40	07w	Round	Pipe (White)	4000 K	L:320 x W:40 x H:1000
DLH7-4032-PRB/40	07w	Round	Pipe (Black)	4000 K	L:320 x W:40 x H:1000
DLH5-5032-PRW/40	05w	Round	Pipe (white)	4000 K	L:505 x W:30-10 x H:1000
DLH5-5032-PRB/40	05w	Round	Pipe (Black)	4000 K	L:505 x W:30-10 x H:1000
DLH15-8020-PRW/40	15w	Round	Pipe (white)	4000 K	L:200 x W:80 x H:1000
DLH5-230-PDC/30	05w	Round	Dome (Clear glass)	3000 K	L:70 x W:230 x H:1000
DLH5-230-PDS/40	05w	Round	Dome (Smoked Grey)	4000 K	L:70 x W:230 x H:1000
DLFB6-27G95/30	06w	Round	(Antic Brass)	3000 K	L:95 x W:95 x H:1000
DLH15-200-PRW/30	15w	Round	Crystal PC	3000 K	L:200 x W:200 x H:1000
DLH24-400-PRW/40	24w	Round	Saucer (White)	4000 K	L:100 x W:400 x H:1000
DLH24-400-PRB/30	24w	Round	Saucer (Black)	3000 K	L:100 x W:400 x H:1000
DLH24-400-PRG/40	24w	Round	Saucer (Grey)	4000 K	L:100 x W:400 x H:1000

Voltage :: 85V-265V

Lumen :: 80lm/w

PF :: >0.6



:: 07w

:: 05w

:: 15w



:: 15w



White



Black



Green


:: 24w ::



APPLICATIONS :: offices, restaurants, hotels, display centre, public areas etc.

PENDANT LIGHT FIXTURE WITHOUT LAMP

Item Code	Colour (inside)	Colour (outside)	Base	Dimensions (mm)
DPL250-290-WH/BK	White	Black + Wood	1 x E27	L:290 x W:250 x H:1000
DPL220-500-GD/BK	Golden	Black	1 x E27	L:500 x W:220 x H:1000
DPL360-400-WH/BK	White	Black + Wood	1 x E27	L:400 x W:360 x H:1000
DPL400-A127/WH	White	White	1 x E27	L:200 x W:400 x H:1000
DPL400-A127/GD/BK	Golden	Black	1 x E27	L:200 x W:400 x H:1000
DPL400-A127/SN	White	Satin Nickel	1 x E27	L:200 x W:400 x H:1000
DPL420-320-WH/BK	Black	Black + Acrylic	3 x E27	L:320 x W:420 x H:1000

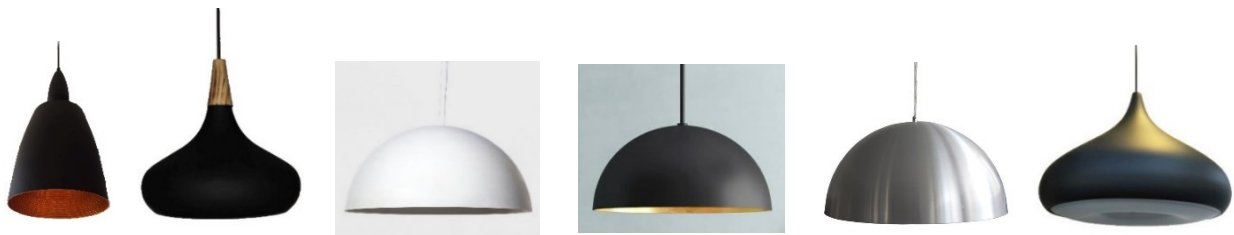

APPLICATIONS ::


restaurants, office, hotels, residence, display centre, etc.

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

FLOOR LAMP

Item Code	Frame	Type	Shade (mm)	Base / Leg (mm)	Height (mm)
DFR-153-TWAB-40BN	Wood+Metal	Tripod	D:400 x H:250mm	W:550 x D:35x16mm	H:1530mm
DFR-160-TCB-45BK	Metal	Tripod	D:450x380 x H:310mm	W:590 x D:13mm	H:1600mm
DFR-160-TCB-45BN	Metal	Tripod	D:450x380 x H:310mm	W:590 x D:13mm	H:1600mm
DFR-164-TXCB-45BK	Metal	Tapered X	D:450x380 x H:310mm	W:280x200 x D:17mm	H:1640mm
DFR-164-TXCB-45BN	Metal	Tapered X	D:450x380 x H:310mm	W:280x200 x D:17mm	H:1640mm

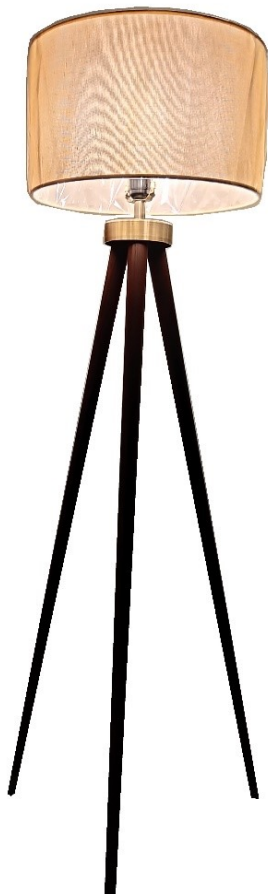

Wood colour ::: Walnut
 Metal Colour ::: Antic Brass
 Fabric Colour ::: Brown
 Lamp Holder ::: 1xE27

Metal Colour ::: Black
 Metal Colour ::: Copper
 Fabric Colour ::: Black / Brown
 Lamp Holder ::: 1xE27


APPLICATIONS::

offices, banks, hotels, residences etc.

WALL BRACKET INDOOR

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	CCT	Frame	Appearance	Dimensions (mm)
DLUD6-130-SRW/30	06w	3000 K	Rectangular	White	L:130 x W:110 x H:60
DLUD5-150-SOW/30	05w	3000 K	Oval	White	L:150 x W:100 x H:100
DLUD5-100-SSW/30	05w	3000 K	Square	White	L:100 x W:100 x H:80
DLML18-460-SRW/30	18w	4000 K	Alluminium	White	L:460 x W:80 x H:55
DLWB24-400-2SW/40	24w	3000 K	Snake	White	L:400 x W:240 x H:70
DML-350-G227/SW	no lamp (2xE27)	-	Glass + Iron	Fogged	L:350 x W:57 x H:65
DWB-250-G127-FW	no lamp (1xE27)	-	Flower	Fogged & Black	L:250 x W:180 x H:230

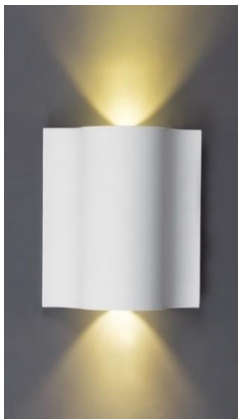

Watt :: 6w

Voltage ::: 85V-265V
Beam Angle ::: 30° - 90°
CCT (K) ::: 3000K
Lumen ::: 90lm/w
PF ::: >0.6
Appearance ::: White

::: Updown Light



Watt :: 5w



Watt :: 18w



APPLICATIONS ::

hotels, residence, ressorts, public areas etc.



2 x E27 Lamp Holder



Fogged Glass :: Flower

LED BOUNDARY LIGHT ::: UPDOWN LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	LED Brand	Appearance	Protection	Dimensions (mm)
DLSR8-108-SSB/30	08w	EPISTAR (Taiwan)	SQUARE (Black)	IP65	L:108 x W:108 x H:80
DLSR8-108-SSG/30	08w	EPISTAR (Taiwan)	SQUARE (Grey)	IP65	L:108 x W:108 x H:80
DLSR12-260-SRB/30	12w	EPISTAR (Taiwan)	RECTNAG. (Black)	IP65	L:260 x W:125 x H:125
DLUD8-95-SRB/30	08w	EPISTAR (Taiwan)	ROUND (Black)	IP65	L:105 x W:95 x H:87
DLUD10-130-SRG/30	1x10w	BRIDGELUX (USA)	CYLINDER (Grey)	IP65	L:130 x W:90 x H:130
DLUD20-170-SRG/30	2x10w	BRIDGELUX (USA)	CYLINDER (Grey)	IP65	L:170 x W:90 x H:130
DLUD10-200-SRG/30	2x05w	BRIDGELUX (USA)	CURVED (Grey)	IP65	L:200 x W:100 x H:85
DLUD10-165-SRG/30	2x05w	BRIDGELUX (USA)	RECTNAG. (Grey)	IP65	L:165 x W:95 x H:55
DLUD4-130-SRB/30	4x01w	CREE (USA)	ROUND (Black)	IP65	L:130 x W:130 x H:55
DLUD6-170-SOG/30	6x01w	CREE (USA)	OVAL (Grey)	IP65	L:170 x W:70 x H:40

:: Security Light



8w

:: Updown Light




:: Updown Light



2x5w

:: Updown Light



4x1w



12w



1x10w & 2x10w



2x5w



6x1w

Voltage ::: 85V-265V

CCT (K) :::

3000K



LED GARDEN ::: STAIRCASE LIGHT OUTDOOR WEATHER PROOF

24 months warranty against any manufacturing defect.

Item Category	Item Code (WARM)	Power (Rated)	Appearance	Protection	Dimensions (mm)
Garden Cap Light	DLGL3-75-SRG/30	03w	Round :: Grey	IP66	L:140 x W:75 x H:280
Garden Light	DLGL5-68-SRG/30	05w	Round :: Grey	IP66	L:105 x W:68 x H:270
Garden Cap Light	DLGL12-115-SRG/30	12w	Round :: Grey	IP66	L:83 x W:115 x H:150
Bollard Light	DLBL12-3015-SRG/30	12w	Round :: Grey	IP65	L:150 x W:150 x H:300
Bollard Light	DLBL7-3016-SRG/30	07w	Rectangular :: G	IP65	L:160 x W:45 x H:300
Bollard Light	DLBL10-6016-SRG/30	10w	Rectangular :: G	IP65	L:160 x W:45 x H:600
Staircase Light	DLSC3-185-CRG/30	03w	Rectangular :: G	IP65	L:185 x W:40 x H:48
Staircase Light	DLSC3-045-SRW/30	03w	Square :: White	IP67	L:66 x W:45 x H:33
Staircase Light	DLSC3-65-CSW-30	03w	Square :: White	IP44	L:66 x W:65 x H:35
Staircase Light	DLSC3-90-CRB/30	03w	Square :: Black	IP65	L:90 x W:90 x H:55
Staircase Light	DLSC3-145-CRG/30	03w	Rectangular :: G	IP65	L:145 x W:45 x H:70
Staircase Light	DLSC6-117-SRG/30	06w	Square :: Grey	IP65	L:117 x W:117 x H:33

::: Garden Light

::: Staircase Light



Voltage	:::	85V~265V	Lumen	:::	80-90lm/w
Beam Angle	:::	30° - 90°	PF	:::	>0.6
CCT (K)	:::	3000 K	Appearance	:::	Grey/Black

LED INGROUND LIGHT OUTDOOR WATER PROOF

24 months warranty against any manufacturing defect.

Item Code (WARM)	Power (Rated)	Voltage	Beam	Protection	Dimensions (mm)
DLIG1-42-22-CRA/30	01w	85V-265V	30°	IP67	L:42 x W:42 x H:80
DLIG1-42-12-CRS/30	01w	12V	30°	IP68	L:42 x W:42 x H:80
DLIG1-52-22-CRS/30	01w	85V-265V	30°	IP68	L:52 x W:52 x H:80
DLIG3-52-22-CRA/30	03w	85V-265V	30°	IP67	L:52 x W:52 x H:80
DLIG3-52-12-CRS/30	03w	12V	30°	IP68	L:52 x W:52 x H:80
DLIG3-75-22-CRS/30	03w	85V-265V	30°	IP68	L:75 x W:75 x H:98
DLIG3-100-22-CRS/30	03w	85V-265V	30°	IP68	L:100 x W:100 x H:75
DLIG6-125-CRSN/27	06w	85V-265V	30°	IP68	L:125 x W:125 x H:90
DLIG7-100-22-CRS/30	07w	85V-265V	60°	IP67	L:100 x W:100 x H:80
DLIG15-150-22-CRS/30	15w	85V-265V	60°	IP67	L:150 x W:150 x H:92
DLIG3-152-22-CRS/30	03w	85V-265V	1D x 30°	IP68	L:52 x W:52 x H:80
DLIG3-252-22-CRS/30	03w	85V-265V	2D x 30°	IP68	L:52 x W:52 x H:80

TRANSFORMER options

DLT5-12-68/B	05VA 12V IP68 L:46 x W:39 x H:36	DLT30-12-68/B	30VA 12V IP68 L:110 x W:72 x H:74
DLT10-12-68/B	10VA 12V IP68 L:81 x W:51 x H:63	DLT40-24-68/B	40VA 12V IP68 L:110 x W:72 x H:74



::: Inground Light

::: Inground Light



::: Inground Light

::: Inground Light -Directional



Beam Angle :: 30°-60°

Appearance :: SS

APPLICATIONS :: Swimming Pool, Fountain, any other artificial under water location

LED UNDER WATER LIGHT WATER PROOF

24 months warranty against any manufacturing defect.

Item Code	Power	Voltage	LED Brand	Protection	Dimensions (mm)
DLIG1-42-12-CRS/30	01w	12V/24V	CREE (USA)	IP68	L:42 x W:42 x H:80
DLIG3-52-12-CRS/30	03w	12V/24V	CREE (USA)	IP68	L:52 x W:52 x H:80
DLIG3-100-24-CRS/30	03w	12V/24V	BRIDGELUX (USA)	IP68	L:100 x W:100 x H:75
DLIG6-125-24-CRS/30	06w	12V/24V	BRIDGELUX (USA)	IP68	L:125 x W:125 x H:85
DLUW3-82-SRS/30	03w	12V	BRIDGELUX (USA)	IP68	L:82 x W:82 x H:150
DLUW6-120-SRS/30	06w	12V	BRIDGELUX (USA)	IP68	L:120 x W:120 x H:150
DLUW6-125-SRSN/27	06w	12V	EPISTAR (Taiwan)	IP68	L:125 x W:125 x H:180
DLUW6-120-SRS/RGB	06w	12V	BRIDGELUX (USA)	IP68	L:120 x W:120 x H:155
DLUW9-145-SRS/RGB	09w	12V	BRIDGELUX (USA)	IP68	L:145 x W:145 x H:170
DLUW18-290-SRC/30	18w	12V/24V	EPISTAR (Taiwan)	IP68	L:277 x W:277 x H:60
DLUW36-290-SRC/30	36w	12V/24V	EPISTAR (Taiwan)	IP68	L:277 x W:277 x H:60

TRANSFORMER options

DLT5-12-68/B	05VA 12V IP68 L:46 x W:39 x H:36	DLT20-24-68/B	20VA 24V IP68 L:110 x W:70 x H:74
DLT10-12-68/B	10VA 12V IP68 L:81 x W:51 x H:63	DLT40-24-68/B	40VA 24V IP68 L:110 x W:70 x H:74
DLT30-12-68/B	30VA 12V IP68 L:110 x W:72 x H:74	DLT105-12-44/B	100w 12V IP44 L:160 x W:130 x H:80
DLT40-12-68/B	40VA 12V IP68 L:110 x W:72 x H:74	DLT200-12-44/B	200w 12V IP44 L:160 x W:130 x H:80
DLT10-24-68/B	10VA 24V IP68 L:81 x W:51 x H:63	DLT600-12-44/B	600w 12V IP44 L:180 x W:150 x H:90



18w/36w



::: Inground Light

::: Inground Light

::: Under Water Light

::: Under Water Light



APPLICATIONS :: Swimming Pool, Fountain, any other artificial under water location


ensuring safety and comfort...



LED FLOOD LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	LED Chip	Beam	Dimensions (mm)
DLF10-150-SG/60	DLF10-150-SG/30	10w	SMD	90°	L:150 x W:113 x H:43
DLF20-163-SG/60	DLF20-163-SG/30	20w	SMD	90°	L:163 x W:139 x H:28
DLF30-170-SG/60	DLF30-170-SG/30	30w	SMD	90°	L:187 x W:170 x H:40
-	DLF50-140-C30G/27	50w	COB	30°	L:140 x W:160 x H:95
-	DLF50-190-C08G/30	50w	COB	8-16°	L:190 x W:210 x H:110
DLF50-210-SG/60	DLF50-223-SLG/30	50w	SMD	90°	L:240 x W:210 x H:45
DLF100-295-SG/60	DLF100-276-SLG/30	100w	SMD	90°	L:295 x W:255 x H:55
DLF200-345-SG/60	DLF200-350-SLG/30	200w	SMD	90°	L:345 x W:375 x H:58

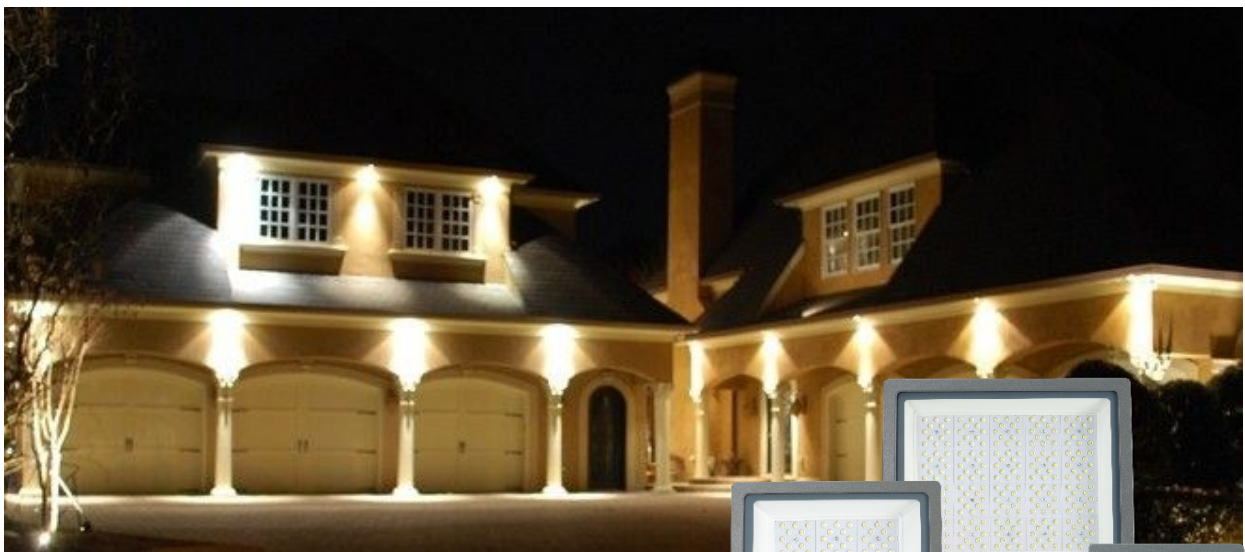

10w

20w

30w

50/100/200w



Voltage	:::	85V-265V
Protection	:::	IP66/IP67
CCT (K)	:::	6000/3000/2700K
LED Chips	:::	EPISTAR (Taiwan)
Lumen	:::	100-110lm/w
CRI	:::	ra>80
PF	:::	>0.90
Frame Appearance	:::	Rectangular Black / Grey



50w Beam 30°

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

LED PROFESSIONAL FLOOD LIGHT OUTDOOR - high power

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Chip Type	LED Brand	Beam	Dimensions (mm)
DLF400-520-CB/60	400w	COB	EPISTAR	90°	L:520 x W:365 x H:100
DLF400-530-SB/60	400w	SMD	OSRAM	40°/60°/90°	L:530 x W:300 x H:180
DLF1000-600-SB/60	1000w	SMD	OSRAM	90°	L:600 x W:560 x H:565
DLF1000-470-SB/60	1000w	SMD	CREE	30°/60°	L:470 x W:543 x H:250



400w



Voltage	:::	85V-265V
Protection	:::	IP65/IP66
CCT (K)	:::	6000 K
Lumen	:::	110lm/w
CRI	:::	ra>80
PF	:::	>0.90 / >0.60
Frame	:::	Rectangular
Appearance	:::	Black

1000w



APPLICATIONS::


Construction Area, Playing Ground, Mines, Industries, Façade Lighting etc.

LED STREET LIGHT OUTDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Chip Type	LED Brand	Beam	Dimensions (mm)
DLST40-330-SG//40	40w	SMD	EPISTAR	140°*70°	L:330 x W:150 x H:65
DLST60-375-SG//40	60w	SMD	EPISTAR	140°*70°	L:375 x W:150 x H:65
DLST100-525-SG//40	100w	SMD	EPISTAR	140°*70°	L:525 x W:180 x H:75
DLST150-650-SG//40	150w	SMD	EPISTAR	140°*70°	L:650 x W:260 x H:95
DLST200-700-SG//40	200w	SMD	EPISTAR	140°*70°	L:700 x W:260 x H:95
DLST100-630-CG//60	100w	COB	EPISTAR	120°	L:630 x W:315 x H:90
DLST150-740-CG//60	150w	COB	EPISTAR	120°	L:740 x W:315 x H:90
DLST100-650-CG//60	100w	COB	EPISTAR	120°	L:650 x W:250 x H:90
DLST150-800-CG//60	150w	COB	EPISTAR	120°	L:800 x W:310 x H:130

Available in a variety of sizes

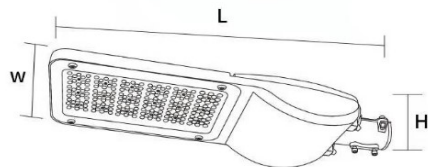

100W COB



150W COB



LED STREET LIGHT OUTDOOR



APPLICATIONS::

Suitable for lighting at streets, high ways, bridges, ports, parking lots etc.

TECHNICAL DATA SHEET

Power (Rated)	::	40w-200w
LED Chip	::	EPISTAR
Body	::	Alluminum die cast (Silver Grey-Powder Coated)
Driver	::	1 Constant current DECENT® / MEAN WELL brand driver
Operating Voltage	::	100V-300V
Frequency (Hz)	::	50/60Hz
Power Factor	::	≥0.95
Colour Temperature	::	6500K (DAY) / 4000K (COOL) / 3000K (WARM)
Lumen	::	100-110lm/w)
Beam Angle	::	140°*70° (SMD) / 120° (COB)
Life Time	::	50,000 hrs.
Operating Temperatur	::	25 °C to 55 °C
Index of Protection	::	IP66
Certifications	::	CE, RoSH, TuV
Country of Origin	::	CHINA




LED HIGH BAY LIGHT INDOOR

24 months warranty against any manufacturing defect.

Item Code	Power (Rated)	LED Chip Type	LED Brand	Reflector	Dimensions (mm)
DLHB100-410-SF/60	100w	SMD	EPISTAR	Fish Scale	L:410 x W:410 x H:446
DLHB100-410-SM/60	100w	SMD	EPISTAR	Matt	L:410 x W:410 x H:446
DLHB150-502-SF/60	150w	SMD	EPISTAR	Fish Scale	L:502 x W:502 x H:390
DLHB150-502-SM/60	150w	SMD	EPISTAR	Matt	L:502 x W:502 x H:390



LED Chip	:::	EPISTAR SMD2835
Driver	:::	Isolated (Constant)
Voltage	:::	100V-300V
Beam Angle	:::	90°
CCT (K)	:::	6500K
CRI	:::	ra>80
Lumen	:::	110lm/w
PF	:::	>0.6
Beam Angle	:::	90°
Temperature	:::	- 30° C to +70° C
Protection	:::	IP44
Average Life	:::	50,000 hrs.
Certification	:::	CE, RoSH, TuV

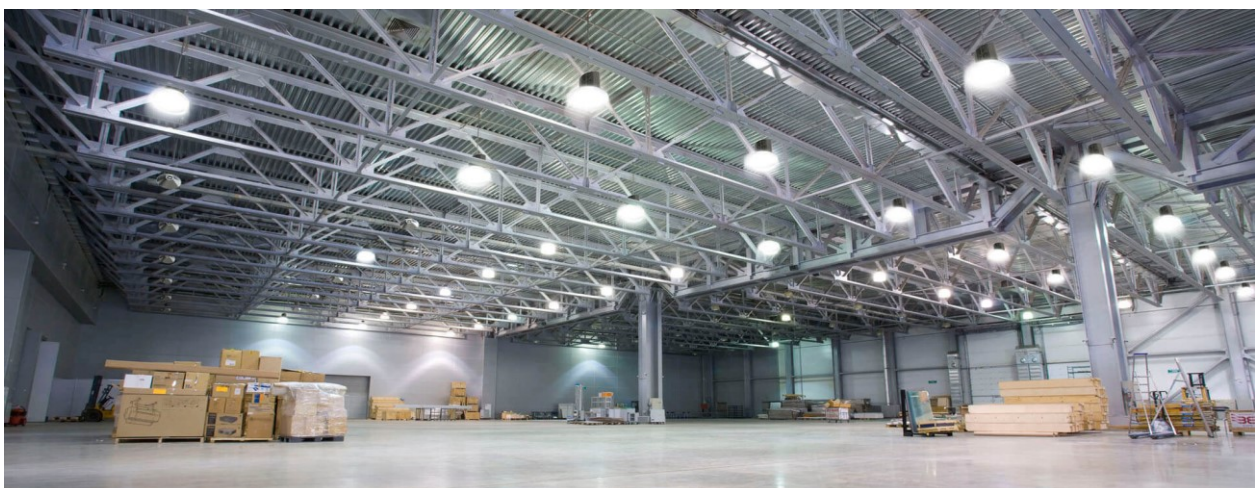

APPLICATIONS::

Suitable for lighting in workshops, warehouses, factories, gas stations, supermarkets etc.

ensuring safety and comfort...



LED WALL WASHER (SURFACE & INGROUND)

24 months warranty against any manufacturing defect.


Item Code	Power/meter	LED Chip	CCT	Protection	Dimensions (mm)
DLWW18-4343-SG/30	18w	SMD 18	3000K	IP65	L:1000 x W:43 x H:43
DLWW18-4250-SG/27	18w	SMD 18	2700K	IP65	L:975 x W:42 x H:50
DLWW24-4250-SG/30	24w	SMD 24	3000K	IP65	L:1000 x W:42 x H:50
DLIG12-500-22-CRS/30	12w	SMD 12	3000K	IP67	L:500 x W:90 x H:80
DLIG24-1000-CRS/30	24w	SMD 24	3000K	IP67	L:1000 x W:90 x H:73

::: 18w/24w Surface

::: 12w/24w Inground



Voltage	:::	180V-260V
Beam Angle	:::	30°
CCT (K)	:::	2700K
CRI	:::	ra>80
Lumen	:::	90lm/w
PF	:::	>0.6

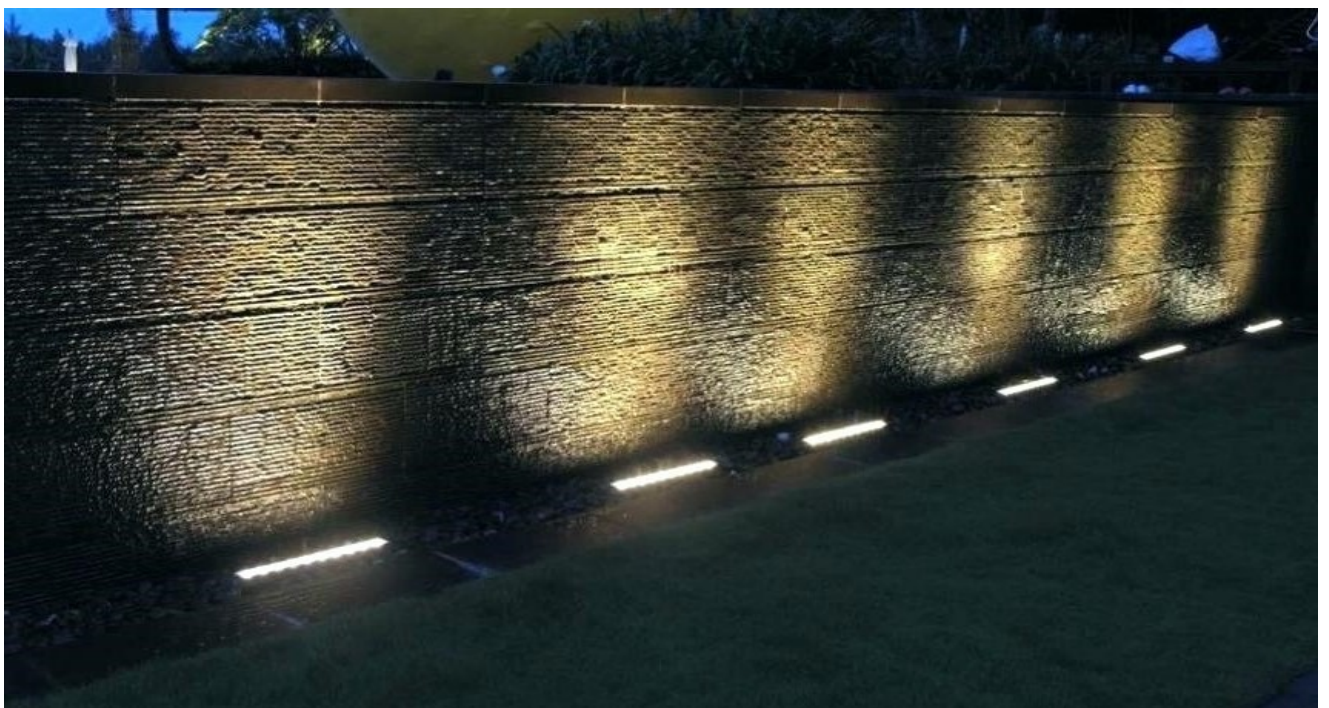

APPLICATIONS::

commercial buildings, hotels, residence, restaurants, public areas etc.

ensuring safety and comfort...



LED FLEXIBLE STRIP ::: NEON FLEXIBLE STRIP LIGHT

12 months warranty against any manufacturing defect.


Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	LED Chip	Protection	Dimensions (mm)
DLFS-57-D120-167/60	DLFS-57-D120-167/40	DLFS-57-D120-167/30	5730 : D120	IP68	L:10000 x W:16 x H:07
-	DLFS-57-D120-188/40	DLFS-57-D120-188/30	5730 : D120	IP68	L:10000 x W:18 x H:08
-	-	DLFS-57-T180-219/30	5730 : T180	IP68	L:10000 x W:21 x H:09
-	-	DLFS-28-T180-187/30	2835 : T180	IP68	L:10000 x W:18 x H:07
-	-	DLNFS-28-S120-816/30	2835 : S120	IP68	L:10000 x W:08 x H:16
-	DLFS9-28-S1212/40	DLFS9-28-S1212/30	2835 : S120	IP20	L:500 x W:08 x H:04
-	DLFS16-28-S2012/40	-	2835 : S204	IP20	L:500 x W:10 x H:04

::: Double Line



- Voltage** :: 180V-260V
- Voltage** :: 12V
- Beam Angle** :: 120°
- CCT (K)** :: 6000/4000/3000K
- CRI** :: ra>80
- Lumen** :: 90lm/w
- PF** :: >0.6

::: Triple Line

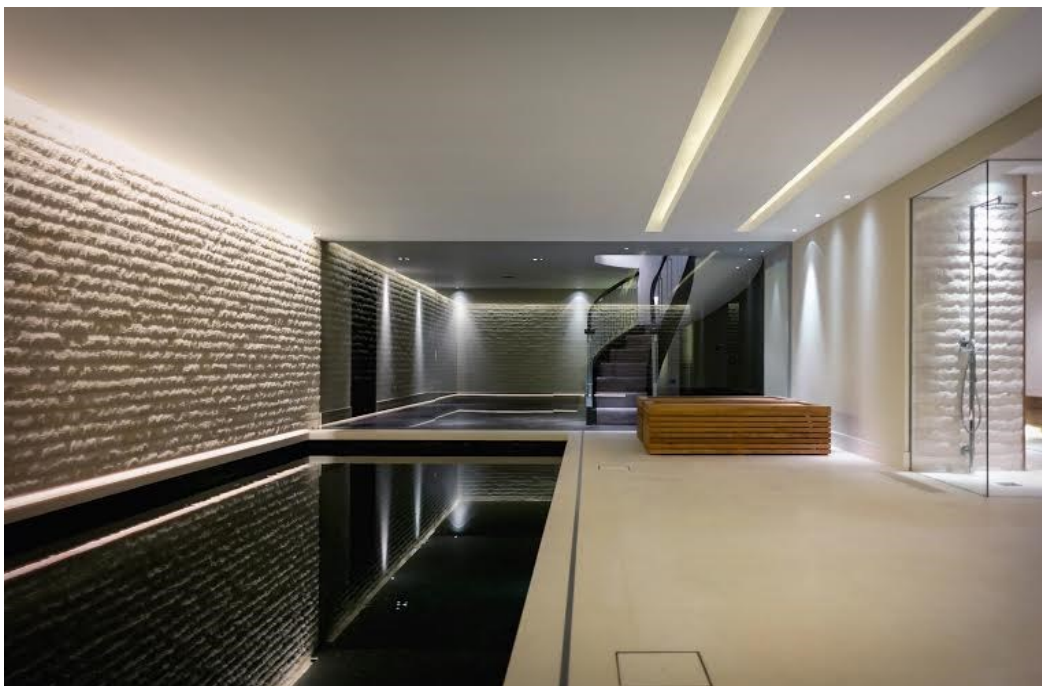

::: Neon Strip



::: Strip 12V



APPLICATIONS::

commercial buildings, hotels, residence, restaurants, public areas etc.

House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

ensuring safety and comfort...



LED LINEAR LIGHT CONCEAL

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Material	Cut-out (mm)	Dimensions (mm)
DLL32-1000-CRW/60	DLL32-1000-CRW/30	32w	Alumn+Acrylic	Ø1000x80	L:1020 x W:91 x H:35



Voltage	:::	160V-260V
CCT (K)	:::	6000/3000K
Lumen	:::	100lm/w
Appearance	:::	White

:: continuous line

:: elegant look

:: customized shape

:: upgraded design



APPLICATIONS::

offices, banks, hotels, display centre, public areas etc.


House # 102/1, Road # 8/A (New)
West Dhanmondi, Dhaka - 1209.

sales@decentdistributions.com
+88 01711009624, 01711021768

LED T5 INTEGRATED FIXTURE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Item Code (WARM)	Power (Rated)	Dimensions (mm)
DLF18-1200T5/60	DLF18-1200T5/40	DLF18-1200T5/30	DLF18-1200T5/27	18w	L:1178 x W:20 x H:32
DLF14-900T5/60	DLF14-900T5/40	DLF14-900T5/30	DLF14-900T5/27	14w	L:875 x W:20 x H:32
DLF9-600T5/60	DLF9-600T5/40	DLF9-600T5/30	DLF9-600T5/27	09w	L:570 x W:20 x H:32
DLF5-300T5/60	DLF5-300T5/40	DLF5-300T5/30	DLF5-300T5/27	05w	L:290 x W:20 x H:32

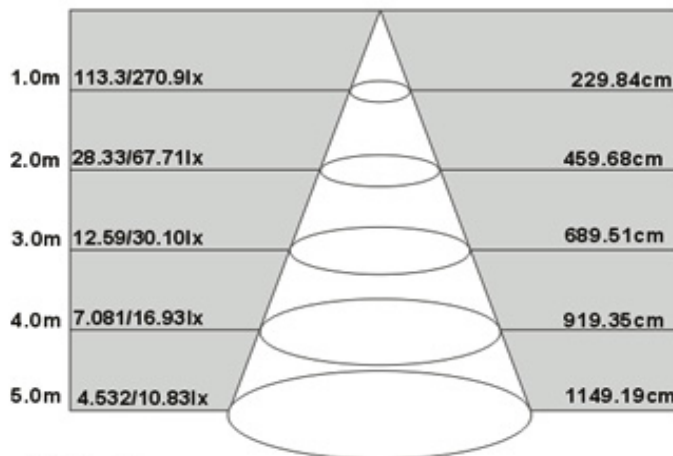

T5 square alluminum white body milky diffuser



APPLICATIONS ::

offices, hotels, banks, display centre, residence, public areas etc.

Operating Voltage 5-265V at 50/60Hz

Indirect lighting

Connectable

Lumen Maintenanç± 5% after 8,000hrs

Lumen :: 80lm/w CRI :: ra>80

Beam Angle :: 120° PF :: >0.6

Appearance :: Semi Rectangle (WHITE)



Transparent cap

Available sizes

LED TRACK SPOT LIGHT SURFACE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Colour	Dimensions (mm)
-	DLTS10-40-SRW/40	DLTS10-40-SRW/30	10w	White	L:140 x W:40 x H:180
-	DLTS10-40-SRB/40	DLTS10-40-SRB/30	10w	Black	L:140 x W:40 x H:180
DLTS10-50-SRW/65	DLTS10-50-SRW/40	DLTS10-50-SRW/30	10w	White	L:130 x W:50 x H:180
-	DLTS12-115-SRW/40	-	12w	White	L:115 x W:25 x H:138
-	DLTS12-115-SRB/40	-	12w	Black	L:115 x W:25 x H:138
DLTS20-66-SRW/65	DLTS20-66-SRW/40	DLTS20-66-SRW/30	20w	White	L:156 x W:66 x H:206
DLTS20-66-SRB/65	DLTS20-66-SRB/40	DLTS20-66-SRB/30	20w	Black	L:156 x W:66 x H:206
DLTS24-80-SRB/65	-	DLTS24-80-SRB/30	24w	Black	L:150 x W:80 x H:230
-	DLTS30-90-SRW/40	DLTS30-90-SRW/30	30w	White	L:180 x W:90 x H:270
-	DLTS30-90-SRB/40	DLTS30-90-SRB/30	30w	Black	L:180 x W:90 x H:270
TRACK BAR	DLTB-980-C2-WH	DLTB-980-C2-BK	-	Wh/Bk	L:980 x W:40 x H:17
TRACK BAR	DLTB-1480-C2-WH	DLTB-1480-C2-BK	-	Wh/Bk	L:1480 x W:40 x H:17
TRACK BAR	DLTB-1980-C2-WH	DLTB-1980-C2-BK	-	Wh/Bk	L:1980 x W:40 x H:17



:: 10w :: :: 10w :: :: 12w :: :: 20w :: :: 30w :: :: TRACK BAR ::

Voltage :: 100V-265V

Beam Angle :: 30° - 90°

CCT (K) :: 6500/4000/3000K















APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

LED SPOT LIGHT-mini CONCEAL INDOOR

24 months warranty against any manufacturing defect.

Picture	Item Code (DAY)	Power	CCT	Body Colour	Cut-out (mm)	Dimensions (mm)
	DLS1-22FL-CRW/40	01w	4000 K	White	Ø20	L:22 x W:22 x H:26
	DLS1-22FL-CRW/30	01w	3000 K	White	Ø20	L:22 x W:22 x H:26
	DLS1-31FR-CRW/30	01w	3000 K	White	Ø25	L:31 x W:31 x H:25
	DLS1-33FA-CRW/40	01w	4000 K	White	Ø25	L:33 x W:33 x H:25
	DLS1-35FL-CRW/40	01w	4000 K	White	Ø25	L:35 x W:35 x H:25
	DLS1-35FL-CRW/30	01w	3000 K	White	Ø25	L:35 x W:35 x H:25
	DLS3-38FR-CRS/30	03w	3000 K	Satin	Ø30	L:38 x W:38 x H:25
	DLS3-40FR-CRA/30	03w	3000 K	Anique Brass	Ø30	L:40 x W:40 x H:25
	DLS3-40FR-CRW/65	03w	6500 K	White	Ø30	L:40 x W:40 x H:25
	DLS3-40FR-CRW/30	03w	3000 K	White	Ø30	L:40 x W:40 x H:25
	DLS3-42FL-CRW/30	03w	3000 K	White	Ø30	L:42 x W:42 x H:38
	DLS3-42FL-CRB/30	03w	3000 K	Black	Ø30	L:42 x W:42 x H:39

LED SPOT LIGHT-mini CONCEAL INDOOR

Picture	Item Code (DAY)	Power	CCT	Colour	Cut-out (mm)	Dimensions (mm)
	DLS3-48FR-CRW/40	03w	4000 K	White	Ø35	L:48 x W:48 x H:25
	DLS3-48FR-CRW/30	03w	3000 K	White	Ø35	L:48 x W:48 x H:25
	DLS3-52MR-CRW/60	03w	6000 K	White	Ø45	L:52 x W:52 x H:25
	DLS3-52MR-CRW/40	03w	4000 K	White	Ø45	L:52 x W:52 x H:25
	DLS3-52MR-CRW/30	03w	3000 K	White	Ø45	L:52 x W:52 x H:25
	DLS3-60-MR-CSW/65	03w	6500 K	White	Ø45	L:60 x W:60 x H:25
	DLS3-60-MR-CSW/30	03w	3000 K	White	Ø45	L:60 x W:60 x H:25
	DLS3-52MR-CRA/30	03w	3000 K	Anqique Brass	Ø45	L:52 x W:52 x H:25
	DLS3-70MR-CRA/30	03w	3000 K	Anqique Brass	Ø50	L:68 x W:68 x H:60



Voltage :: 100V-265V














Lumen :: 100lm/w

APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

LED SPOT LIGHT CONCEAL INDOOR

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLWW10-147-CRW-30	10w	3000 K	Fixed Opal :: Rectangular White	138*36	L:147 x W:45 x H:50
	DLLS10-148FR-CW/40	10w	4000 K	Fixed Lensed :: Rectangular White	138*36	L:148 x W:45 x H:50
	DLLS10-148FR-CB/40	10w	4000 K	Fixed Lensed :: Rectangular Black	138*36	L:148 x W:45 x H:50
	DLLS20-280FR-CB/40	20w	4000 K	Fixed Lensed :: Rectangular Black	270*36	L:280 x W:45 x H:50
	DLS7-63-MR-CRW/30	07w	3000 K	Moving Reflector :: Round White	Ø55	L:63 x W:63 x H:70
	DLS7-63-MR-CRB/30	07w	3000 K	Moving Reflector :: Round Black	Ø55	L:63 x W:63 x H:70
	DLS7-80-MR-CRW/40	07w	4000 K	Moving Reflector :: Round White	Ø70	L:80 x W:80 x H:80
	DLS7-80-MR-CRW/30	07w	3000 K	Moving Reflector :: Round White	Ø70	L:80 x W:80 x H:80
	DLS7-85FR-CRW/40	07w	4000 K	Fixed Reflector :: Round White	Ø75	L:85 x W:85 x H:80
	DLS7-85FR-CRW/30	07w	3000 K	Fixed Reflector :: Round White	Ø75	L:85 x W:85 x H:80
	DLS7-85FH-CRW/40	07w	4000 K	Fixed Lensed :: Round White	Ø75	L:85 x W:85 x H:55
	DLS7-85FH-CRW/30	07w	3000 K	Fixed Lensed :: Round White	Ø75	L:85 x W:85 x H:55
	DLS7-92-BL-CSW/40	07w	4000 K	Fixed Lensed :: Square White	Ø75	L:92 x W:92 x H:50
	DLS7-92-BL-CSW/30	07w	3000 K	Fixed Lensed :: Square White	Ø75	L:92 x W:92 x H:50
	DLS7-92-BL-CSWB/30	05w	3000 K	Moving Reflector :: Square Wh+Bk	Ø75	L:92 x W:92 x H:55

LED SPOT LIGHT CONCEAL INDOOR

Picture	Item Code	Power	CCT	Appearance	Cut-out (mm)	Dimensions (mm)
	DLS7-92-BL-CRW/64		6400 K	Moving Lensed :: Round White	Ø80	L:92 x W:92 x H:35
	DLS7-92-BL-CRW/40	07w	4000 K			
	DLS7-92-BL-CRW/30		3000 K			
	DLS7-85-GR-CRW/60		6000 K	Moving Lensed :: Round White	Ø75	L:85 x W:85 x H:65
	DLS7-85-GR-CRW/30	07w	3000 K			
	DLS7-85-GR-CRB/40		4000 K	Moving Lensed :: Round Black	Ø75	L:85 x W:85 x H:65
	DLS7-85-GR-CRB/30	07w	3000 K			
	DLS10-85MH-CRW/40	10w	4000 K	Moving Honey Comb :: Round White	Ø75	L:85 x W:85 x H:60
	DLS12-85-MR-CRB/30	12w	3000 K	Moving Reflector :: Round Black	Ø75	L:85 x W:85 x H:70
	DLS12-110-BL-CRW/40		4000 K	Moving Lensed :: Round White	Ø90	L:110x W:110x H:40
	DLS12-110-BL-CRW/30	12w	3000 K			
	DLS30-160-PR-CRW/30	30w	3000 K	Moving Lensed :: Round White	Ø120	L:160 x W:160 x H:120
	DLS24-212-MR-CW/40		4000 K	Moving Reflector :: Rectangular White	200*100	L:212 x W:112 x H:110
		2x12w				
	DLS24-212-MR-CW/30		3000 K			
	S36-282-MR-CW/40	3x12w	4000 K	Moving Reflector :: Rectangular White	265*100	L:282 x W:112 x H:110

Voltage :: 85V-265V Lumen :: 100lm/w

CCT (K) :: 6500K/4000K/3000K

SPOT LIGHT CASIGN CONCEAL

Item Code	Shell Material	Base	Colour	Cut-out (mm)	Dimensions (mm)
DSC-120-CSA-16SB	Alluminum	1 x GU5.3	Silver Brushed	Ø75	L:120 x W:120 x H:20
DSC-110-CSA-16WH	Alluminum	1 x GU5.3	White	Ø75	L:110 x W:110 x H:20
DSC-80-CSA-16SN	Zinc Alloy	1 x GU5.3	Satin Nickel	Ø75	L:80 x W:80 x H:20


SPOT LIGHT CASIGN-SINGLE (without lamp)



DSC-120-CSA-16SB



DSC-110-CSA-16WH



DSC-80-CSA-16SN



APPLICATIONS::

display centres, expositions, restaurants, focal points etc.

ensuring safety and comfort...



LED SMART DOWN LIGHT CONCEAL

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Cut-out (mm)	Dimensions (mm)
DLSD5-102-CRW/65	-	DLSD5-102-CRW/30	05w	Ø75	L:102 x W:102 x H:50
-	N03E0-1032	-	8w	Ø100	L:113 x W:113 x H:72
DLSD9-120-CRW/65	DLSD9-120-CRW/40	DLSD9-120-CRW/30	9w	Ø100	L:120 x W:120 x H:50
-	-	DLSD9-120-CRB/30	9w	Ø100	L:120 x W:120 x H:50
DLSD12-138-CRW/65	-	DLSD12-138-CRW/30	12w	Ø115	L:138 x W:138 x H:60
-	N03E0-1037	-	12w	Ø130	L:145 x W:145 x H:75
DLSD18-188-CRW/65	-	DLSD18-188-CRW/30	18w	Ø150	L:188 x W:188 x H:70



Voltage	:::	100V-265V
Beam Angle	:::	60°
CCT (K)	:::	6500K/4000K/3000K
CRI	:::	ra>80
Lumen	:::	100lm/w
PF	:::	>0.6
Appearance	:::	White/Black



:: high lumen

:: elegant look

:: focused light

:: upgraded design



APPLICATIONS::

offices, banks, hotels, display centre, public areas etc.

LED PANEL LIGHT RECESSED

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Frame	Cut-out (mm)	Dimensions (mm)
-	DLP3-90-CRW/30	03w	Round	Ø75	L:85 x W:85 x H:20
-	DLP3-90-CSW/30	03w	Square	Ø75	L:85 x W:85 x H:20
DLP6-87-CRW/40	-	06w	Round	Ø87	L:87 x W:87 x H:20
DLP6-120-CRW/65	DLP6-120-CRW/30	06w	Round	Ø105	L:120 x W:120 x H:20
DLP6-120-CSW/65	DLP6-120-CSW/30	06w	Square	Ø105	L:120 x W:120 x H:20
DLP10-117-RRW/60	DLP10-117-RRW/40	10w	Round	Ø110	L:117 x W:117 x H:20
DLP10-117-RSW/60	DLP10-117-RSW/30	10w	Square	Ø110	L:117 x W:117 x H:20
DLP12-170-CRW/65	DLP12-170-CRW/30	12w	Round	Ø155	L:170 x W:170 x H:20
DLP12-170-CSW/65	DLP12-170-CSW/30	12w	Square	Ø155	L:170 x W:170 x H:20
DLP16-168-RRW/60	DLP16-168-RRW/30	16w	Round	Ø155	L:168 x W:168 x H:20
DLP16-168-RSW/60	DLP16-168-RSW/30	16w	Square	Ø155	L:168 x W:168 x H:20
DLP48-595-CSW/65	DLP48-595-CSW/30	48w	Square	Ø595	L:595 x W:595 x H:25
DLP90-1195-CSW/40		90w	Rectangular	Ø1195	L:1195 x W:595 x H:30



Input Voltage	85-265V at 50/60Hz	CCT (K) :: 6500K	CCT (K) :: 3000K
Output Voltage	13V-25V :: 24V-43V	CRI :: ra>80	Lumen :: 80lm/w
Lumen Maintenance	± 5% after 8,000hrs	Beam Angle :: 120°	PF :: >0.6 & >0.9

LED CYLINDER LIGHT SURFACE

24 months warranty against any manufacturing defect.

Picture	Item Code	Power	CCT	Appearance	Beam	Dimensions (mm)
	DLD5-60SL-SW/40	05w	4000 K	Saucer :: WH	60°	L:60 x W:60 x H:18
	DLD5-60SL-SW/30		3000 K			
	DLD5-60SL-SB/40	05w	4000 K	Saucer :: BK	60°	L:60 x W:60 x H:18
	DLD5-60SL-SB/30		3000 K			
	DLD7-85SL-SW/40	07w	4000 K	Saucer :: WH	60°	L:85 x W:85 x H:20
	DLD7-85SL-SW/30		3000 K			
	DLD7-85SL-SB/40	07w	4000 K	Saucer :: BK	60°	L:85 x W:85 x H:20
	DLD7-85SL-SB/30		3000 K			
	DLD7-54CL-SW/40	07w	4000 K	Cylinder :: WH	60°	L:53 x W:53 x H:70
	DLD7-54CL-SW/30		3000 K			
	DLD7-54CL-SB/40	07w	4000 K	Cylinder :: BK	60°	L:53 x W:53 x H:70
	DLD7-54CL-SB/30		3000 K			
	DLD12-85CR-SW/40	12w	4000 K	Cylinder :: WH	60°	L:85 x W:85 x H:137
	DLD12-85CR-SB/40		4000 K			
	DLD12-85CR-SB/40	12w	4000 K	Cylinder :: BK	60°	L:85 x W:85 x H:137
	DLD12-85CR-SB/30		3000 K			
	DLD15-130-SRW/30	15w	3000 K	Cylinder :: WH	90°	L:130 x W:130 x H:130
	DLD15-130-SRB/60		6000 K			
	DLD15-130-SRB/40	15w	4000 K	Cylinder :: BK	90°	L:130 x W:130 x H:130
	DLD15-130-SRB/30		3000 K			
	DLS12-70CF-SW/40	12w	4000 K	Cylinder :: Folding :: WH	45°	L:185 x W:70 x H:185
	DLS12-70CF-SB/30		4000 K			
	DLS12-70CF-SB/30	12w	4000 K	Cylinder :: Folding :: BK	45°	L:185 x W:70 x H:185
	DLS12-70CF-SB/30		4000 K			
	DLS24-200-MR-SRB/30	2 x 12w	3000 K	Rectangular :: BK	60°	L:200 x W:100 x H:100

APPLICATIONS :: display centres, expositions, restaurants, focal points etc.

LED SLIM DOWN LIGHT SURFACE

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (COOL)	Item Code (WARM)	Power (Rated)	Frame	Dimensions (mm)
DLD9-120-SRW/65	DLD9-120-SRW/40	DLD9-120-SRW/30	09w	Round	L:120 x W:120 x H:25
DLD9-120-SSW/65	DLD9-120-SSW/40	DLD9-120-SSW/30	09w	Square	L:120 x W:120 x H:25
DLD16-170-SRW/65	DLD16-170-SRW/40	DLD16-170-SRW/30	16w	Round	L:170 x W:170 x H:25
DLD16-170-SSW/65	DLD16-170-SSW/40	DLD16-170-SSW/30	16w	Square	L:170 x W:170 x H:25
DLD30-300-SRW/65	-	-	30w	Round	L:300 x W:300 x H:25
DLD30-300-SSW/65	-	-	30w	Square	L:300 x W:300 x H:25



Operating Voltage 90-260V at 50/60Hz
 Lumen Maintenance ± 5% after 8,000hrs
 CCT (K) :: 6500K / 4000K / 3000K
 CRI :: ra>80 Lumen :: 90lm/w
 Beam Angle :: 120° PF :: >0.6

Aluminum white slim body with acrylic diffuser

Slim



upgraded

Narrow

Unique

LED DOWN LIGHT SURFACE

SENSOR LIGHT MIRCOWAVE

24 months warranty against any manufacturing defect.

Item Code	Power	CCT	Appearance	Operation	Dimensions (mm)
DLD6-120-SRW/65	06w	6500 K	Round :: WH	Manual	L:117 x W:117 x H:35
DLD6-120-SSW/65	06w	6500 K	Round :: WH	Manual	L:117 x W:117 x H:35
DLD12-170-SRW/65	12w	6500 K	Round :: WH	Manual	L:167 x W:167 x H:35
DLD12-170-SSW/65	12w	6500 K	Round :: WH	Manual	L:167 x W:167 x H:35
DLDS12-175-SRW/40	12w	4000 K	Round :: WH	Mircowave	L:175 x W:175 x H:25
DLDS18-225-SRW/40	18w	4000 K	Round :: WH	Mircowave	L:225 x W:225 x H:25





Input Voltage 85-265V at 50/60Hz
Output Voltage 13V-25V :: 24V-43V
Maintenance ± 5% after 8,000hrs
Beam Angle 120°
Lumen 80lm/w
PF 0.6



SENSOR LIGHT MIRCOWAVE

APPLICATIONS:: offices, hotels, display centre, residence, public areas etc.

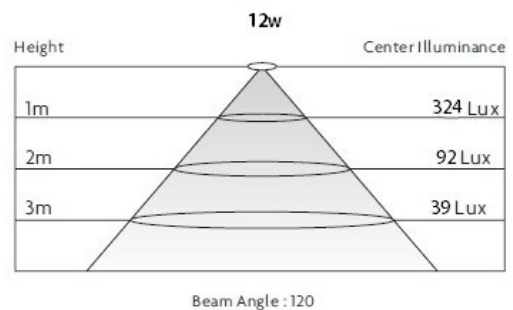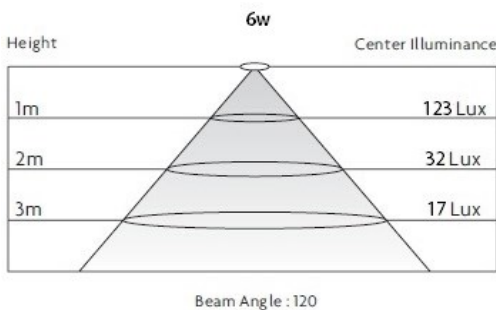

LED BULB INDOOR

24 months warranty against any manufacturing defect.

Item Code (DAY)	Item Code (WARM)	Power (Rated)	Frame	CRI	Dimensions (mm)
DLMR5-50-SG-5.3/65	DLMR5-50-SG-5.3/30	05w	Round	ra>80	L:50 x W:50 x H:53
DLB12-27C33/65	DLB12-27C33/30	12w	Round	ra>80	L:105 x W:33 x H:105
DLB15-27A70/65	-	15w	Round	ra>80	L:127 x W:68 x H:127
DLB18-27A80/65	-	18/20w	Round	ra>80	L:153 x W:80 x H:153



::: Poly Carbonate + Alluminum body with acrylic cover :::

- Voltage* ::: 90V-265V
- Protection* ::: IP50
- Beam Angle* ::: 90° - 180°
- CCT (K)* ::: 6500/3000K
- Lumen* ::: 90lm/w
- PF* ::: >0.9
- Appearance* ::: White



APPLICATIONS:

offices, restaurants, hotels, residence, display centre, public areas etc.